

# DLG Test Report 7422

Animat Inc.

## Vitella Flooring for Calves


Deformability/Elasticity, Permanent Tread Load, Abrasion, Slip resistance, Acid resistance



**ANIMAT VITELLA  
FLOORING FOR CALVES**

- ✓ Deformability/Elasticity
- ✓ Permanent Tread Load
- ✓ Abrasion
- ✓ Slip resistance
- ✓ Acid resistance

DLG Test Report 7422

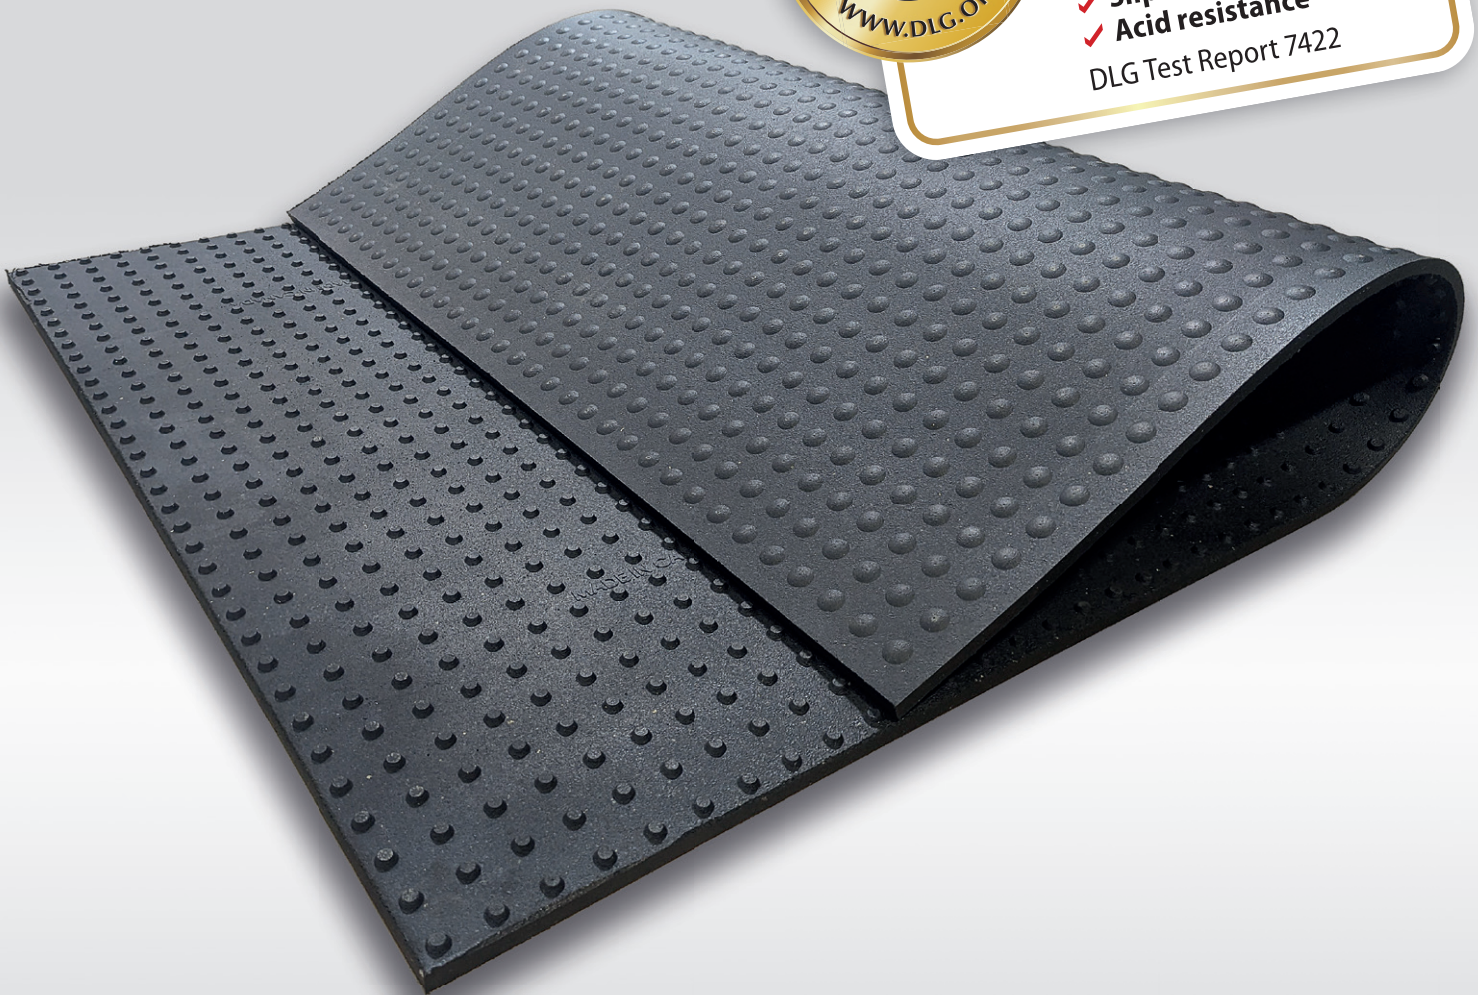

## Overview

The DLG QUALITY SEAL for operating equipment and consumables encompasses products, which are subjected to extensive testing of their value-determining and advertised characteristics. The tested criteria and the requirements to be fulfilled are specified by independent commissions and are designed – over and above legal requirements – to prove the product's fitness for purpose, its advertised characteristics and practical requirements. Testing contents and requirements are developed further by the responsible specialist departments of the DLG e.V. in line with the applicable legislation, as well as with technical and scientific progress. Successful testing is concluded with the assignment of the DLG QUALITY SEAL. The approved products are then published. Other criteria were not investigated.



### ANIMAT VITELLA FLOORING FOR CALVES

- ✓ Deformability/Elasticity
- ✓ Permanent Tread Load
- ✓ Abrasion
- ✓ Slip resistance
- ✓ Acid resistance

DLG Test Report 7422

## Test results

DLG QUALITY PROFILE	Evaluation
Lying measurement deformability and elasticity in new condition*	■ ■ ■
Lying measurement deformability and elasticity following endurance test*	■ ■ ■
Walking measurement deformability and elasticity in new condition*	■ ■ ■ ■ ■
Walking measurement deformability and elasticity following endurance test*	■ ■ ■ ■ ■
Lasting deformation following 250.000 endurance test*	■ ■ ■ ■ ■
No noticeable wear and no damage following 250.000 endurance test*	■ ■ ■ ■
Slip resistance**	■ ■
Resistance to feed acid mixture***	■ ■ ■
Resistance to uric acid***	■ ■ ■
Resistance to sulfurous acid***	■ ■ ■
Resistance to ammonia***	■ ■ ■
Resistance to barn disinfectants***	■ ■ ■
Resistance to peracetic acid***	■ ■ ■
Abrasion/Wear resistance*	■ ■ ■

DLG Evaluation range:

\* ■ ■ ■ or better = meets, exceeds or significantly exceeds the established DLG standards,

■ = meets the legal requirements for marketability, ■ = failed

\*\* Single criteria slip resistance: ■ ■ = passed, ■ = failed

\*\*\* Single criteria acid resistance: ■ ■ ■ = resistant, ■ ■ = limited resistant, ■ = failed

Requirements of DIN 3763 are fulfilled for the tested criteria.

Deformation and elasticity corresponds to class 2 DIN 3763 for single pens for calves

## Manufacturer and contact information

### Manufacturer and Applicant

Animat Inc.  
395, rue Rodolphe-Racine  
Sherbrooke QC J1R 0S7, Canada

### Contact

Phone 0060 819 821 2091 222  
PSavary@animat.ca  
www.animat.ca



### DLG TestService GmbH Groß-Umstadt location

Max-Eyth-Weg 1 • 64823 Groß-Umstadt • Germany  
Phone: +49 69 24788-600 • Fax: +49 69 24788-690  
Tech@DLG.org • www.DLG.org

Download of all  
DLG test reports free of charge  
at: [www.DLG-Test.de](http://www.DLG-Test.de)