


Promat CGW Canada Inc.

Cow Mattress Pasture Mat with 40 mm Comfortpad und HRC Top Cover

Deformability/Elasticity, Permanent Tread Load,
Acid resistance

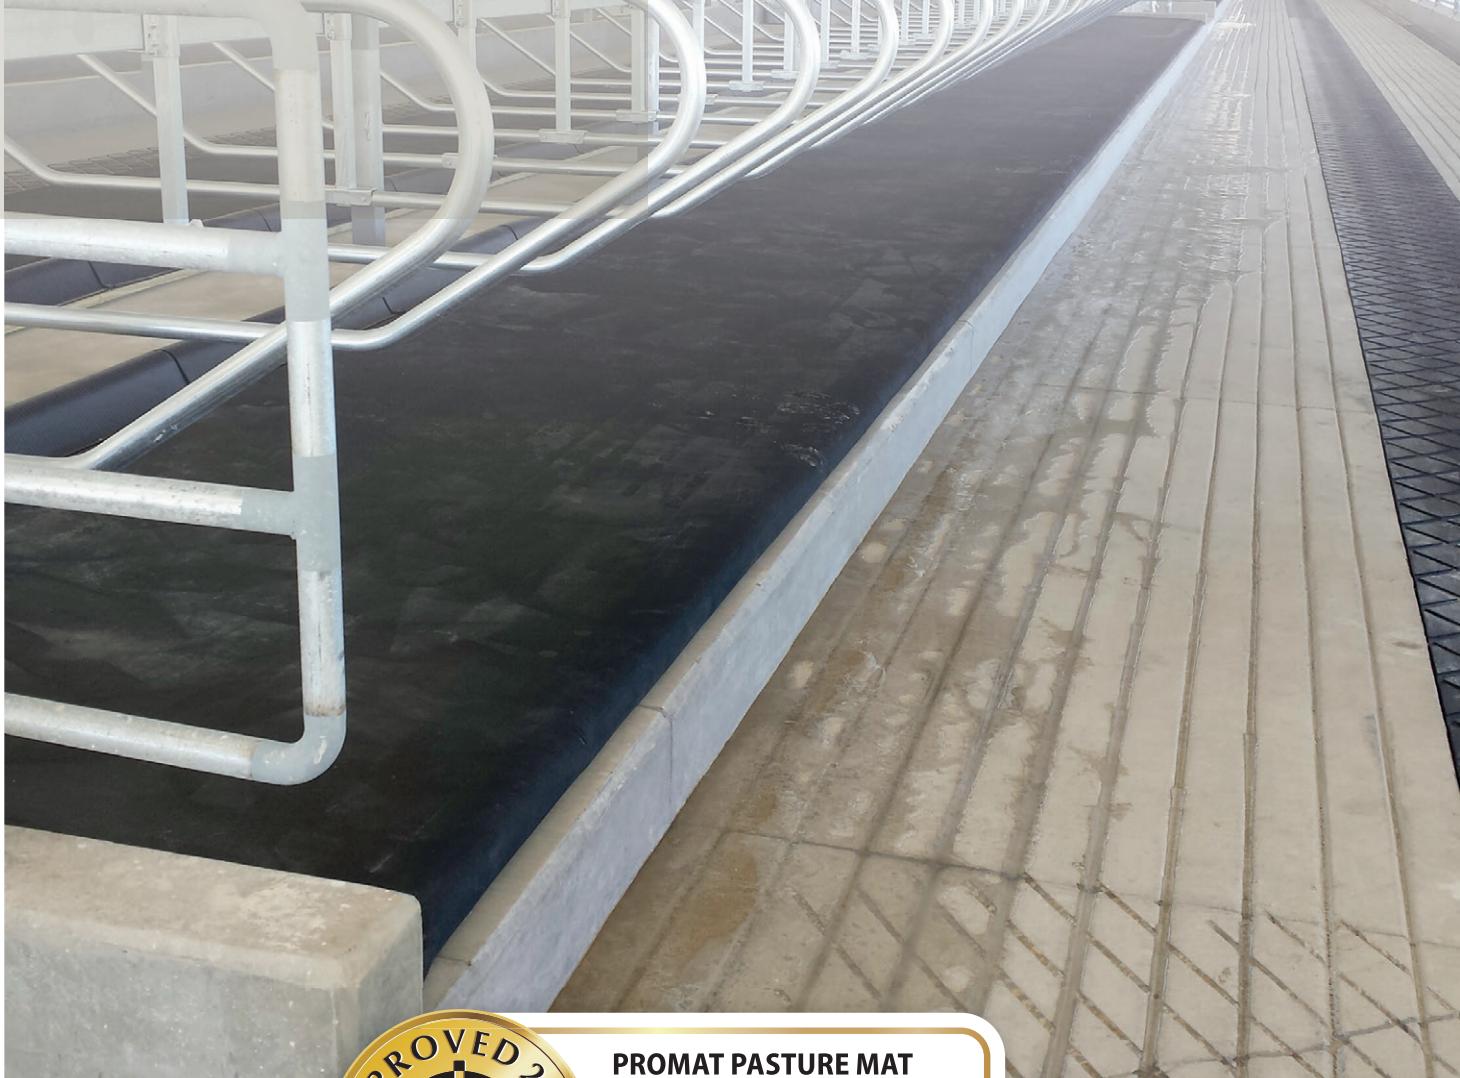

PROMAT PASTURE MAT WITH 40 MM COMFORTPAD AND HRC TOP COVER

- ✓ Deformability/Elasticity
- ✓ Permanent Tread Load
- ✓ Acid resistance

DLG Test Report 7535



Overview

A test mark "DLG APPROVED for individual criteria" is awarded for agricultural products which have successfully fulfilled a scope-reduced usability testing conducted by DLG according to independent and recognized evaluation criteria. The test is intended to highlight particular innovations and key criteria of the test object.

The test may contain criteria from the DLG test scope for overall tests, or focus on other value-determining characteristics and properties of the test subject. The minimum requirements, test conditions and procedures as well as the evaluation bases of the test results will be specified in consultation with an expert group of DLG. They correspond to the recognized rules of technology, as well as scientific and agricultural knowledge and requirements. The successful testing is concluded with the publication of a test report, as well as the awarding of the test mark which is valid for five years from the date of awarding. The DLG APPROVED Test "Deformability/Elasticity, Permanent Tread Load, Acid resistance" includes technical measurements on test stands of the DLG Test Center. The deformability and elasticity, the acid resistance, were measured and a permanent tread load was applied. The test was based on the DLG Testing Framework for elastic stable flooring, as of December 2018 and DIN 3763:2022-08 (Elastic floorings for cattle and dairy cows walking and rest surfaces – Requirements and Testing). Other criteria were not investigated.



PROMAT PASTURE MAT
WITH 40 MM COMFORTPAD
AND HRC TOP COVER

- ✓ Deformability/Elasticity
- ✓ Permanent Tread Load
- ✓ Acid resistance

DLG Test Report 7535

Test results

The Promat cow matress Pasture Mat with 40 mm Comfortpad and HRC Top Cover tested here, an elastic floor for cubicles in cubicle houses, was investigated with regard to durability and comfort properties on test stands in the DLG APPROVED Test. The deformability and elasticity, the acid resistance, were measured and a permanent tread load was applied.

Requirements of DIN 3763 are fulfilled in the examined criteria; Deformability and elasticity class 4 according to DIN 3763.

DLG QUALITY PROFIL	Evaluation
Deformability and elasticity in new condition	■ ■ ■ ■ ■ *
Deformability and elasticity following endurance test	■ ■ ■ ■ ■ *
Lasting deformation following endurance test	■ ■ ■ ■ ■ *
No noticeable wear following endurance test	■ ■ ■ ■ ■ □ *
Feed acid mixture resistant	■ ■ **
Uric acid resistant	■ ■ **
Sulfurous acid resistant	■ ■ **
Ammonia solution resistant	■ ■ **
Disinfection liquid resistant	■ ■ **
Peracetic acid resistant	■ ■ **

The DLG test framework provides the following options in its evaluation schemes:

* ■ ■ ■ or better = meets, exceeds or clearly exceeds the specified DLG standard,
■ ■ = meets the legal requirements for marketability, ■ = failed

** ■ ■ = resistant, ■ ■ = limited resistant, ■ = not resistant

Manufacturer and contact information

Manufacturer and Applicant

Promat CGW Canada Inc., 594711 County Rd. 59 South, Woodstock Ontario

Telephone +519 456 2284, Fax +519 456 1458, sales@promatinc.com, www.promatinc.com



DLG TestService GmbH
Groß-Umstadt location
Max-Eyth-Weg 1 • 64823 Groß-Umstadt • Germany
Phone +49 69 24788-600 • Fax +49 69 24788-690
Tech@DLG.org • www.DLG.org

All DLG test reports are
available for download free of
charge at: www.DLG-Test.de