ISTITUTO SPERIMENTALE PER
LA MECCANIZZAZIONE AGRICOLA
SEZIONE DI TREVIGLIO

CASE INTERNATIONAL 2130 V "4WD"
TEST no. 056.

O.E.C.D. no. 1276

Test in accordance with the O.E.C.D. Restricted Standard Code
for the official testing of agricultural tractors.



Report test of: CASE INTERNATIONAL 2130 V "4WD"

Submitted for test by: JI CASE GmbH
Industriestr. 39-40, 4040 Neuss
GERMANY

Date of O.E.C.D. approval:06.09.1990
Period of test: April 1990

ISMA - SOP Treviglio - Via Milano,43 - (BG) - ITALY

ISTITUTO SPERIMENTALE PER
LA MECCANIZZAZIONE AGRICOLA
SEZIONE DI TREVIGLIO

CASE INTERNATIONAL 2130 V "4WD"
TEST no. 056.

O.E.C.D. no. 1276

Test in accordance with the O.E.C.D. Restricted Standard Code
for the official testing of agricultural tractors.



Report test of: CASE INTERNATIONAL 2130 V "4WD"

Submitted for test by: JI CASE GmbH
Industriestr. 39-40, 4040 Neuss
GERMANY

Date of O.E.C.D. approval:06.09.1990
Period of test: April 1990

ISMA - SOP Treviglio - Via Milano,43 - (BG) - ITALY

TABLE OF CONTENTS

- Specification of tractor ..... page 3
- Power take-off performance ..... page 20
- Power lift and hydraulic power test ..... page 24
- Drawbar performance ..... page 25

The tractor CASE INTERNATIONAL 2130 V. serial no. CGC 58202526, Code 582 ABAGAE had been tested in 2 variants:
As model 2130 V "4WD" and as model 2130 V "2WD".

Model 2130 V "2WD" was converted into model 2130 V "4WD" by mounting the front axle drive and by exchange of front axle and steering.

All stated dimensions and tests referred to tyre sizes 7.50/16 (6 ply) at front and 12.4/28 (6 ply) at rear, as well as to track widths 965 mm at front and 800 mm at rear.

- Tractor manufacturer
. Name: JI CASE GmbH;
. Address: Industriestr. 39-40, 4040 Neuss GERMANY;
- Location of tractor assembly: CARRARO S.p.A. ROVIGO ITALY;
- Submitted for test by: the manufacturer;
- Selected by: the manufacturer with the agreement of ISMA;
- Place of running in: Campodarsego (PD) - ITALY;
- Duration of running: 50 hours.
- Location of test: I.S.M.A. Via Milano, 43 - Treviglio (BG) ITALY

I - SPECIFICATION OF TRACTOR

TRACTOR

- Make: CASE INTERNATIONAL;
- Model: 2130 V "4WD";
- Type: Wheeled tractor, unit construction, all wheels drive tractor;
- Number of driving wheels: 4;
- Serial number: CGC 58202526, Code: 582 ABAGAE;
- First serial number: CGC 58200001, Code: 582 ACAGAE.

ENGINE

- Make: SAME;
- Model: 1000.3A/55;
- Type: aircooled 4 stroke diesel engine direct injection;
- Serial number: 06851.

Cylinders

- Number/disposition: 3, vertical in line;
- Bore/stroke: 105/115,5 mm;
- Capacity: 3000 cm^3 ;
- Compression ratio: 17.1 / 1;
- Arrangement of valves: overhead;
- Cylinder liners: without liners.

Supercharging none.

Fuel system

- Fuel feed system: AC corone fuel feed pump;
- Make, model and type of fuel filter: FIAMM FNA 160/00 ;
- Capacity of fuel tank: 60 dm³ ;
- Make, model and type of injection pump: BOSCH PFR 1K 90A 503, immersed pump, one per cylinder, without serial number, in line injection pump;

- Manufacturer's production setting of injection pump:
  .flow rate: 54+/-2 mm³ /stroke at rated speed and full load corresponding to 11.43 dm³/h;
  .timing: 18+/-0.5 before TDC;
- Make, model and type of injectors: BOSCH KBE 58 S 4/4 ;
- Injectors pressure: 18 +/-1 MPa.

Governor

- Make: SAME;
- Model: 065.1652.4;
- Type: mechanical variable speed;
- Governor range of engine speed: from 675 to 2543 rev/min.;
- Rated engine speed: 2350 rev/min.

Air cleaner

- Main filter
  . make: VF VIRGIS;
  . model: 1530236C1;
  . type: dry paper element filter;
  . location: behind of engine;
- Maintenance indicator: with the warning lamp on the dashboard;

Lubrication system

- Type of feed pump: forced feed from gear pump;
- Total oil capacity including filter: 6.7 dm³ ;
- Oil change period: 150 hrs;
- Type of filter: FIAMM FT 4803 IN;
- Number: 1;
- Filter change period: 300 hrs;
- Oil specifications: see page 18.

Cooling system

- Type and detail: air cooling with axial blower;
- Specification of fan: propeller fan driven by engine shaft;
- Number of fan blades: 13;
- Fan diameter: 220 mm;
- Type of temperature control: none.
- Warming indicator: with the warning lamp on the dashboard.

Starting system

- Make: BOSCH;
- Model: JF R 12 V;
- Type: electromagnetic engagement;
- Starter motor power rating: 2.4 kW;
- Safety device: preventig engine from starting in gear;
- Starting system for low temperatures: none.

Electrical equipement

- Voltage: 12 V;
- Generator:
  . make: BOSCH;
  . model: K1 R 14V 55A;
  . type: alternator;
  .power: 630 W;
- Battery: 1 lead acid;
  .capacity: 100 Ah at 20 hours.

Exhaust system

- Make: IMA SAF;
- Model: 1967895C1;
- Type: at chamber reflection absorption;
- Location: on the left hand side of engine cowling, vertical position;
- Height of outlet above ground: 2410 mm.

TRANSMISSION

Clutch: utilized only for travelling of tractor.

- Make: OMG;
- Model: 121947;
- Type: double disk dry clutch;
- Number of plates: 2;
- Plates diameter: 280 mm;
- Control system: by pedal for transmission, by lever for p.t.o.

Gear box

- Make: CARRARO;
- Model: 121947;
- Type: mechanical no-syncromesh speed change gear;
- Arrangement: four speeds forward with three ranges of speed and one reverse group;
- Number of speeds : 12 forward and 12 reverse;
- Available options: 8 forward and 8 reverse.

Rear axle and final drives

- Make: CARRARO;
- Model: 120698/1;
- Type: bevel gear differential and epicyclic reduction final drives.

Differential lock

- Make: CARRARO;
- Model: 120698/1;
- Type: mechanical;
- Control system: engaged or disengaged by pedal.

Front axle and final drives

- Make: CARRARO;
- Model: 124120;
- Type: central shaft with bevel gear drive, differential and epicylic reduction gear final drives;

Differential lock

- none.

Transmission lubrication

- Gear box, rear axle, final drives, power lift and hydraulic system (in common);
  . total capacity including filter: 38 dm^3;
  . change period: 1000 hrs;
  . filter change period: 1000 hrs;
- Front axle and final drive:
  . total capacity: 4.6 dm^3;
  . change period: 1000 hrs;

- Recommended oil: see page 18.

Total rations and speeds

Gear	Group	Number of engine revolutions for one revolution of the driving wheels	Nominal travelling speed at a rated engine speed of 2350 rev/min (*) (km/h)
	FORWARD		
1	S	1140.223	0.44
2	S	769.196	0.66
3	S	526.198	0.99
4	S	374.442	1.39
1	N	244.283	2.14
2	N	164.982	3.17
3	N	112.753	4.63
4	N	80.238	6.51
1	F	56.375	9.27
2	F	38.071	13.73
3	F	26.019	20.09
4	F	18.516	28.23
	REVERSE		
1	S	1359.167	0.38
2	S	917.696	0.56
3	S	627.336	0.83
4	S	446.429	1.17
1	N	291.274	1.79
2	N	196.702	2.66
3	N	134.432	3.88
4	N	95.668	5.46
1	F	67.216	7.78
2	F	45.393	11.51
3	F	31.023	16.85
4	F	22.077	23.67

(*) Calculated with a tyre dynamic radius index of 590 mm.
ISO 4251/1 - 1984)
- Number of revolutions of front wheels for one revolution of rear wheels: 1.6392.

POWER TAKE-OFF

Power take-off proportional to engine speed

- Type: independent, at rear of tractor, in tractor's median plane, engaged or disengaged by hand lever .
  Driven by multiplate wet clutch independent from travel clutch; ISO Standard 500-1979;
- Number of shafts: 1;
- Method of changing of speed: speed selction by external hand lever;
- Location : at rear of tractor;

	P.T.O.
- Height above ground (with tyre size 12.4/28) ..	590 mm
- Distance from the median plane of the tractor ..	0 mm
- Distance behind rear axle.....	387 mm
- Direction of rotation (viewed facing driving end):	clockwise

1) 540 rev/min

- Dimension: ISO Standard 500-1979 type 1 (35 mm - 6 splines);
- PTO speed at rated engine speed .....: 600 rev/min;
- Engine speed at standard power take-off speed: 2115 rev/min;
- Ratio of rotation speeds (engine speed/pto speed): 3.916666;
- Maximum power and torque transmissible: 55 kW and 97 daNm.

2) 1000 rev/min

- Dimension: ISO Standard 500-1979 type 2 (35 mm - 21 splines);
- PTO speed at rated engine speed .....: 1116 rev/min;
- Engine speed at standard power take-off speed: 2105 rev/min;
- Ratio of rotation speeds (engine speed/pto speed): 2.105734;
- Maximum power and torque transmissible: 55 kW and 52 daNm.

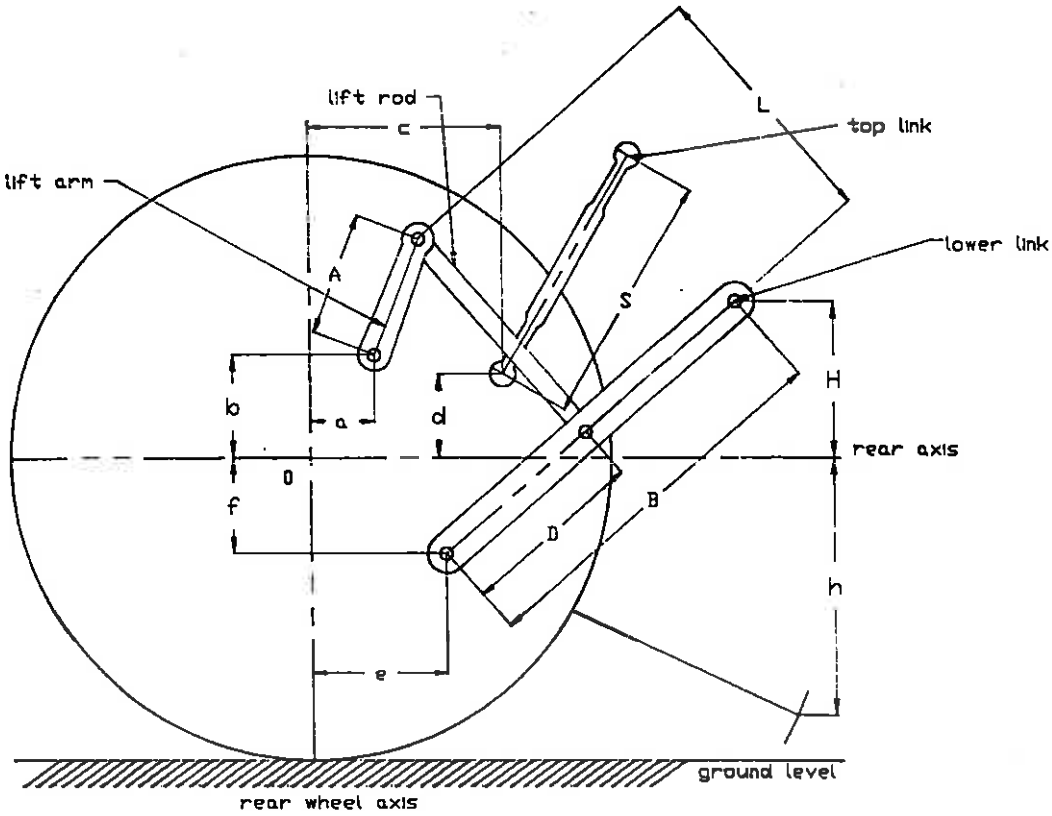
Power take-off proportional to ground speed : none.

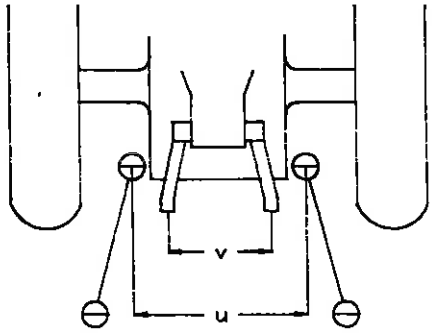
POWER LIFT

- Make: MITA;
- Model: M 60 SRF;
- Type: load sensing;
- Type of hydraulic system: open centre system;
- Type and number of cylinders: 1 internal hydraulic jack at simgle effect;
- Type of lock for transport: mechanical, with screwed tie rods that lock the lower links;
- Relief valve pressure setting: 18 +/- 1 MPa;
- Opening pressure of anti-shock valve: 20 MPa;
- Lift pump type: hydraulic rotary pump, driven by engine shaft;
- Transmission between pump and engine: mechanical;
- Type and number of filters: 1, repeaceable paper cartridge;
- Changing: when the filter clogging warning lamp is lighted;
- Oil capacity: 38 dm^3 in common with gear box;
- Site of oil reservoir : gear box;
- Position, type and No. of additional oil plugs: 4 ways distributor at rear of tractor;
- Maximum volume of oil available to external cylinders: 4 dm^3 ;
- Recommended oil: see page 18.

Three-point linkage

- Category: 1 in conformity with ISO 730/1 - 1977;
- Category adapter: none.


lift rod
c
L
top link
lift arm
lower link
A
S
H
b
a
d
rear axis
0
f
B
D
h
e
ground level
rear wheel axis


v
u

Dimensions of linkage geometry (when connected to the standard frame)

		Dimension or range (mm)	Settings used in test (mm)
Length of lift arms	(A)	260	260
Length of lower links	(B)	820	820
Distance of lift arm :horizontally	(a)	25	25
Pivot point from rear :vertically	(b)	306	306
wheel axis (behind)			
Horizontal distance between the 2 lower link points	(u)	429	429
Horizontal distance between the 2 lift arm and points	(v)	345	345
Length of upper link	(S)	from 500 to 780	647
Distance of upper link :horizontally	(c)	244	244
pivot point from rear :vertically	(d)	243	243
wheel axis			
Distance of lower link :horizontally	(e)	72	72
pivot point from rear :vertically	(f)	192	192
wheel axis			
Distance of lower link pivot point to lift rod pivot points on lower links	(D)	490	490
Length of lift rods	(L)	from 500 to 670	600
Height of lower hitch points relative to the rear wheel axis			
- in Low position	(h)	from 179 to 544	390
- in High position	(H)	from 49 to 300	160
Height above ground of lower hitch points when locked in transport position (*)			750

(*) Assuming the dynamic radius index = 590 mm (ISO 4251/1 - 1984)

SWINGING DRAWBAR : not fitted.

HOLED DRAWBAR : not fitted.

TRAILER HITCH

- Type: J.I CASE;
- Hole diameter: 28 mm;
- Height above ground: 352 min. - 712 max. mm;
- Distance of hitch point from rear wheel axis, horizontally: 515 mm;
- Distance of hitch point from power take-off shaft end
  . vertically :below 238 mm, above 122 mm;
  . horizontally : 130 mm;
- Maximum vertical permissible load: 1471 daN.

STEERING

- Specification: hydrostatic steering with SAVER SUNDESTRAND gear pump, one steering cylinder at double effect acting directly on front axle.
- Make: DANFOSS;
- Model: OSPC 80 LS with priority valve OLSA 40;
- Type: hydrostatic;
- Working pressure: 1,1 MPa;
- Oil capacity: 17 dm^3, in common whit hydraulic system;
- Oil change period: 1000 hrs;
- Filter change period: 1000 hrs;
- Recommended oil: see page 18.

BRAKES

Service brake

- Make: SIRMAC;
- Model: 1967573C1;
- Type: oil immersed multiplate disc, 4 per side total 8 discs, mounted before each epicyclic reduction gear. SK Welman HDT 303 lining material, rear disc diameter 165,25 mm;
- Method of operation: mechanical acting with 2 pedals;
- Trailer braking take-off: none.

Parking brake

- Type: mechanical acting on the service brake;
- Method of operation: mechanically by hand lever.

Steering brake : divided pedal of service brake for normal use locked together.

STEERING WHEELS

- Number: 2 ;
- Location : at front ;
- Track widths: 875 min. - 1280 max. mm;
- Regulation: changing the position of the rims with respect to the disc.

DRIVING WHEELS

- Number: 4;
- Location: 2 at front and 2 at rear;
- Rear track widths: 800 min. 1298 max. mm;
- Regulation: changing the position of the rims with respect to the disc.

WHEELBASE: 1945 mm.

ROLL - BAR

Specifications

- NFU approval number: 013201;
- Make: CARRARO;
- Model: X 260-4;
- Type: tiltable;
- Manufacturer's name: CARRARO S.p.A.;
  . address: Via Olmo, 29 - Campodarsego (PD) ITALY;
- Protective device: roll-bar tiltable.

Materials used in the construction and dimensions

See N.F.U. (France) Test Report on Protective Structures.

DRIVER'S SEAT

- Make: SIFRA;
- Model: 15 M;
- Type: upholstered seat;
- Type of suspension: adjustable spring;
- Type of damping: shock absorber;
- Range of adjustment, longitudinal 210 mm;
  vertical ... 100 mm.

PASSENGER'S SEAT : none.

LIGHTING

Lighting system in accordance with E.E.C. 78/933

	Height above ground of centre with tyre (*) (mm)	Size (mm)	Distance from out side edge of tractor to centre at 800 mm track width (mm)
Headligths	1035	155*90	432.5
Front park. lights	1382	120*40	70
Front finger post	1422	120*40	70
Rear park. lights	1422	120*40	70
Rear finger post	1382	120*40	70
Stop	1422	120*40	70
Reflectors	1127	88*52	139

(*) Tyre size: 7.50/16 front - 12.4/28 rear.

TEST CONDITIONS

Overall dimensions with tyres 7.50/16 front and 12.4/28 rear

	Length (mm)	Width (mm) min	Width (mm) max	Height (mm) exaust sil.	Height (mm) at top of protect.struc.
Without ballast	3450	990	1645	2410	2334

- Ground clearance (unballasted tractor): 253 mm;
- Clearance-limiting part: front axle.

Tractor mass (with tanks full, with frame, water in tyres none)

	Units	Front	Rear	Total
Without driver				
Without ballast	kg	955	1125	2080
With ballast	kg	-	-	-
With driver				
thout ballast	kg	965	1190	2155
..th ballast	kg	-	-	-

Ballast

	no. of weights	total weight (kg)	water (kg)
front	-	-	-
rear	-	-	-
additional	-	-	-

Tyres and track width specifications

	front	rear
- Tyres		
. dimensions	7.50/16	12.4/28
. ply rating	6	
. type	radial	radial
. maximum load (tyre manufacturer's) daN	833	1251
. maximum load (tractor manufact.) daN	833	1251
. inflation pressure (tyre manufact.)kPa	225	170
. dynamic radius index .....mm	375	590
- Chosen track width .....mm	965	800
- Tyres on request	-	pr
	-	pr
	-	pr

Oils, lubrication and fuel
Capacity and change interval

	capacity dm³	oil change h	filter change h
Engine	6.7	150	300
Gear box	38	1000	1000
Front axle and final drives ...	4.6	1000	-
Rear axle and final drives	in common with gear box		
Hydraulic system	"	"	
Other (steering, etc.)	"	"	

Fuel and lubricants recommended and used in tests

Fuel
- Type: AGIP DIESEL, DIN 51601;
  (in accordance with the national standard)
- Specific gravity at 15° C: 0.828 g/cm³.

Engine oil
- Type: AGIP 15/W40 Super Diesel;
- Viscosity: 15.6 cSt;
- Classification: API SE-CD.

Transmission oil

	front axle and final drive	rear axle, final drive and gear box
-Type -Viscosity -Viscosity index -Classification	ELF BF12 10.50 cSt 146	ELF BF12 10.50 cSt 146

Hydraulic fluid
- Type: ELF BF12;
- Viscosity: 10.50 cSt;
- Classification:

Steering oil
- Type: ELF BF12;
- Viscosity: 10.50 cSt;
- Classification:

Grease
- Type:ESSO BEACON 2;
- Number of lubrication points: 15.

I - TEST RESULTS

A. COMPULSORY TESTS RESULTS

(1) MAIN POWER TAKE-OFF PERFORMANCE

- Date and location of test: 06.04.1990 - I.S.M.A. TREVIGLIO (BG) ITALY
- Type of dynamometer: ZOELLNER B 500

ır	Speed		Fuel consumption			Specific
	Engine	P.T.O.	Hourly	Specific		Energy
kW	rev/min	rev/min	l/h	kg/h	g/kWh	kWh/l
AXIMUM POWER - 2 HOUR TEST						
38.5	2356	602	11.43	9.46	246	3.37
OWER AT RATED ENGINE SPEED						
38.5	2356	602	11.43	9.46	246	3.37
TANDARD POWER TAKE-OFF SPEED (540 +/- 10 rev/min)						
37.5	2131	544	11.08	9.17	244	3.38
ART LOADS						
) The torque corresponding to maximum power at rated engine speed						
38.5	2356	602	11.43	9.46	246	3.37
i) 85% of torque obtained in i)						
33.9	2403	614	9.94	8.23	243	3.41
) 75% of torque defined in ii)						
25.4	2459	628	8.11	6.72	265	3.13
v) 50% of torque defined in ii)						
17.3	2482	634	5.92	4.90	283	2.92
) 25% of torque defined in ii)						
8.8	2525	645	4.44	3.68	419	1.99
i) unloaded						
0	2543	649	2.98	2.46	-	-

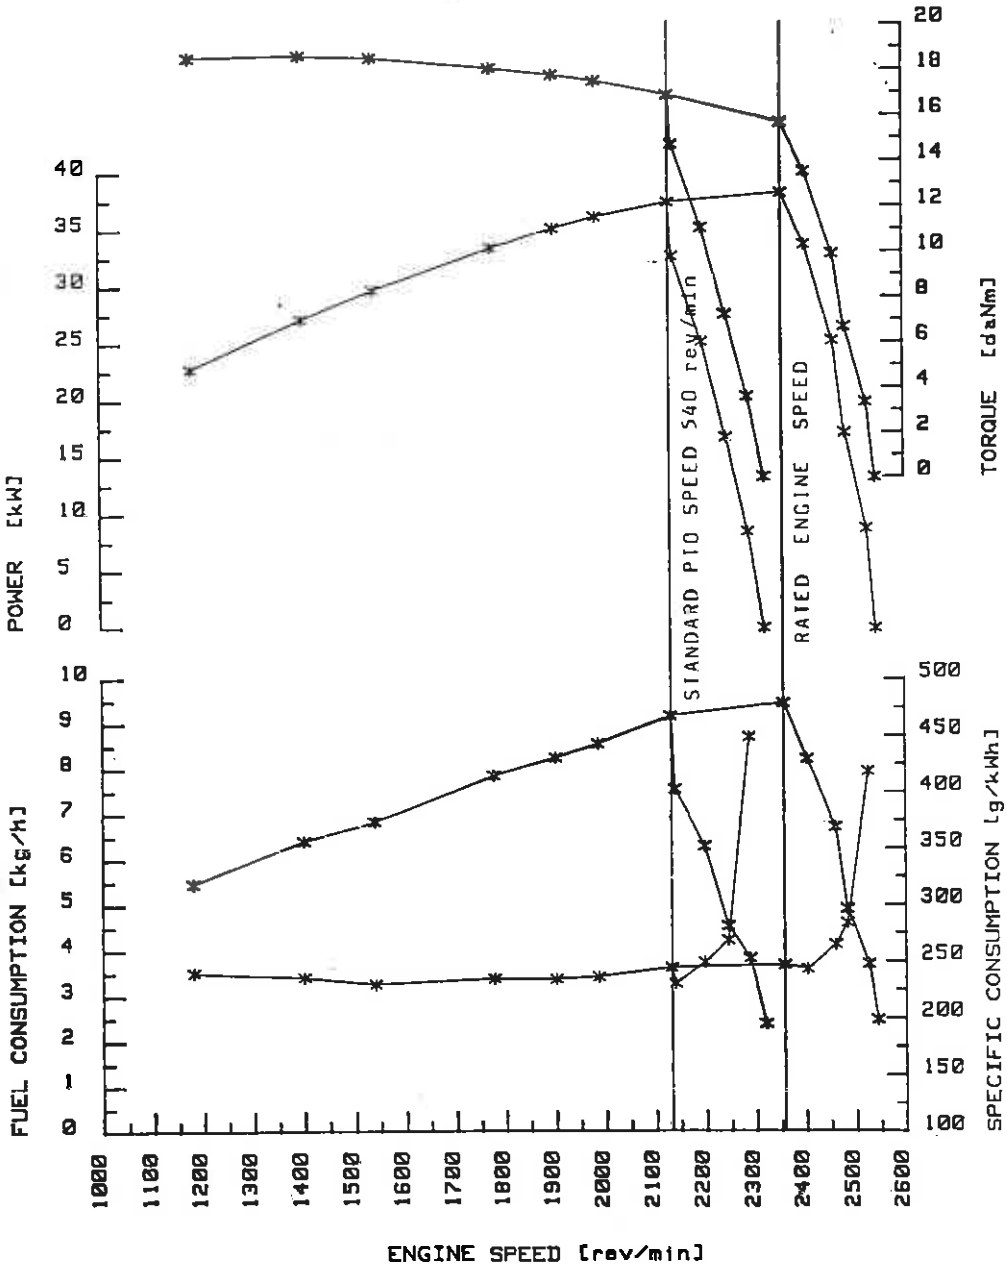
PART LOADS AT STANDARD POWER TAKE-OFF SPEED (540 rev/min)

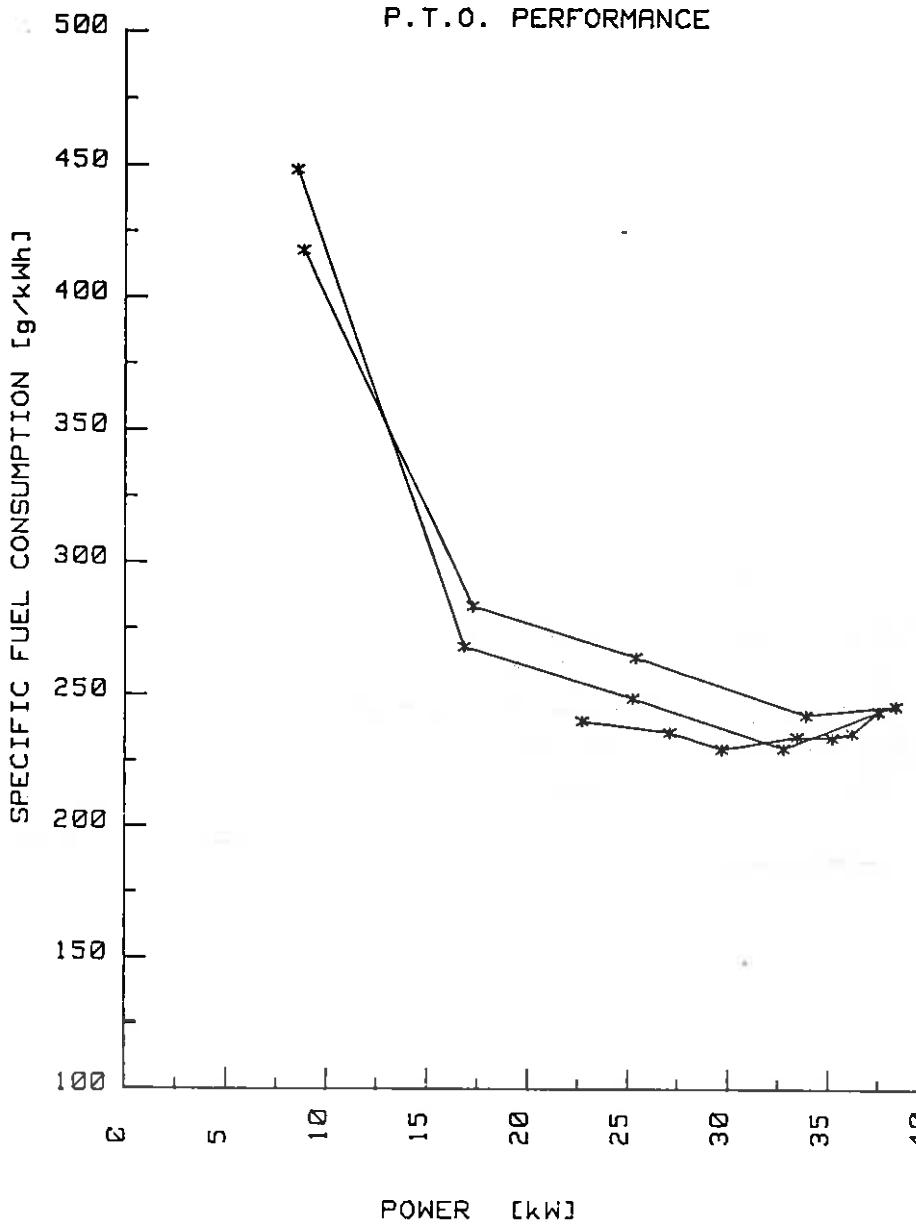
Power	Speed		Fuel consumption			Specific
	Engine	P.T.O.	Hourly	Specific		Energy
kW	rev/min	rev/min	l/h	kg/h	g/kWh	kWh/l
i) The torque corresponding to maximum power available						
37.5	2131	544	11.08	9.17	244	3.38
ii) 85% of torque obtained at maximum power						
32.8	2139	546	9.12	7.55	230	3.60
iii) 75% of torque defined in ii)						
25.2	2197	561	7.59	6.29	250	3.32
iv) 50% of torque defined in ii)						
16.8	2244	573	5.46	4.52	269	3.08
v) 25% of torque defined in ii)						
8.5	2286	584	4.60	3.81	448	1.85
iv) unloaded						
0	2319	592	2.86	2.37	-	-

STANDARD SPECIFIC FUEL CONSUMPTION: 243/283/230/269 g/kWh

- No load maximum engine speed: 2543 rev/min
- Torque (1) at maximum power: 15.62 daNm
- Maximum torque (1) (engine speed: 1399 rev/min) 18.52 daNm
- Mean atmospheric conditions: Temperature ..... 21 C°
  Pressure ..... 99.3 kPa
  Relat. humidity ... 84 %
- Maximum temperatures: Coolant ..... 90 C°
  Engine oil ..... 129 C°
  Fuel ..... 29 C°
  Engine air intake ..... 23 C°

(1) The torque is the equivalent crankshaft torque.


POWER [kW]
FUEL CONSUMPTION [kg/h]
TORQUE [daNm]
SPECIFIC CONSUMPTION [g/kWh]
ENGINE SPEED [rev/min]
SIANDARD PTO SPEED 540 rev/min
RAIED ENGINE SPEED


P.T.O. PERFORMANCE
SPECIFIC FUEL CONSUMPTION [g/kWh]
500
450
400
350
300
250
200
150
100
0
5
10
15
20
25
30
35
40
POWER [kW]

POWER LIFT AND HYDRAULIC POWER TEST

Date and location of tests: 10.04.1990 - ISMA Treviglio (BG)

.1 POWER LIFT

		at hitch point	on the frame
eight of lower hitch point bove ground in down position	mm	200	200
ertical movement	mm	550	603
imum corrected force xerted trough full range	daN	2703	2253
orresponding pressure of ydraulic fluid	MPa	17.0	17.0
oment about rear axle	daNm	2411	3384
aximum tilt angle of mast ver range of lift	degress	--	5

ifting heights relative to the horizontal lower links

m	-200	-198	-100	0	100	200	300	352	400	405	500
ifting forces at hitch points daN	---	2870	2873	2880	2859	2786	2747	2703	---	---	---
ifting forces at test frame daN	---	2891	2884	2752	2546	2413	2315	---	2256	2253	---

) HYDRAULIC POWER TEST

ustained pressure with relief valve open: 18.0 MPa;
ump delivery rate at min pressure: 39.9 l/min;

ydraulic power	kW	flow rate l/min	pressure MPa	oil temp. °C
t 90% of the actual relief alve setting	8.6	33.0	16.0	65
aximum	9.5	37.7	15.5	65

opening pressure of the relief valve: 16.5 MPa

apping point used for test : at rear of tractor;
ydraulic fluid: see page 18.

3) DRAWBAR PERFORMANCE

- **Date of test:** 11.04.1990
- **Type of track:** concrete
- **Type and size of tyre** front: 7.50/16 - 6 ply
  rear: 12.4/28 - 6 ply

Height of drawbar above ground: 4[illegible] mm (unballasted)

Tyre inflation pressure: unballasted .front: 225 kPa .rear: 170 kPa

3.1) MAXIMUM POWER IN TESTED GEARS (unballasted tractor)

Gear	Power	Draw. pull	Speed	Eng. speed	Slip of whell	Specific ener.cons.	fuel	Temperatures cool.	eng.	Atm. cond. temp.	hum.	pres
	kW	daN	km/h	rev/min	%	kWh/l	g/kWh	°C	°C	°C	°C	%	kPa
1S	1.8	1619	0.4	2523	15	0.400	2084	23	54	93	22	70	100.2
2S	3.0	1808	0.6	2515	15	0.638	1300	23	54	93	22	70	100.1
3S	4.3	1717	0.9	2513	15	0.896	930	23	54	93	22	70	100.3
4S	6.0	1673	1.3	2505	15	1.176	709	24	55	94	23	72	99.8
1N	8.8	1660	1.9	2488	15	1.491	557	23	53	94	23	71	100.1
2N	12.9	1664	2.8	2456	15	1.792	465	24	54	93	24	73	100.1
3N	18.9	1659	4.1	2446	15	2.198	376	23	53	94	25	74	100.0
4N	25.6	1616	5.7	2384	13	2.392	348	24	53	93	26	71	100.2
1F	28.9	1223	8.5	2350	8	2.409	342	24	53	93	25	73	100.1
2F	28.2	765	13.3	2355	3	2.410	344	24	53	93	25	71	99.6

4) TRANSMISSION AND FUEL CONSUMPTION CHARACTERISTICS

Gear	Power	Draw. pull	Speed	Eng. speed	Slip of wheel	Specific ener.cons.	fuel	Temperatures cool.	eng.	temp.	hum.	Atm. cond pres
	kW	daN	km/h	rev/min	%	kWh/l	g/kWh	°C	°C	°C	°C	%	KPa
4.) Selected gear at maximum power													
1F	28.9	1223	8.5	2350	8	2.409	342	24	53	93	25	73	100.1
4.1.1) 75% of pull at maximum power at rated speed													
1F	22.9	917	9.0	2416	5	2.337	354	23	53	92	26	72	99.8
4.1.2) 50% of pull at maximum power at rated speed													
1F	16.1	610	9.5	2454	2	1.917	428	24	55	93	26	71	100.2
4.1.3) next higher gear giving the same pull as in 4.1.1 red. eng. speed													
2F	22.9	915	9.0	1620	5	2.663	310	24	55	92	26	71	100.3
4.1.4) next higher gear giving the same pull as in 4.1.2. red. eng. speed													
2F	16.1	610	9.5	1657	2	2.556	323	23	54	93	26	70	100.0

Gear	Power	Draw. pull	Speed	Eng. speed	Slip of wheel	Specific ener.cons.	fuel	Temperatures cool.eng.		temp.	hum.	Atm. cond pre
	kW	daN	km/h	rev/min	%	kWh/l	g/kWh	°C	°C	°C	°C	%	KPa
4.2) Selected gear nearest to 7.5 Km/h													
4N	25.6	1616	5.7	2384	13	2.392	348	24	53	93	26	71	100.
4.2.1) 75% of pull at maximum power at rated speed													
4N	20.8	1209	6.2	2435	7	2.286	361	22	51	92	26	73	100.
4.2.2) 50% of pull at maximum power at rated speed													
4N	14.6	808	6.5	2466	4	1.896	438	24	53	94	25	72	99.9
4.2.3) next higher gear giving the same pull as in 4.2.1 red. eng. speed													
1F	20.8	1210	6.2	1714	7	2.701	308	22	52	93	26	71	99.9
4.2.4) next higher gear giving the same pull as in 4.2.2 red. eng. speed													
1F	14.4	800	6.5	1720	4	2.400	348	22	52	91	26	71	99.9

REPAIRS AND REMARKS: none.

TEST CARRIED OUT BY
(P.a. Giovanni LAMORATTA)

THE DIRECTOR OF TESTING STATION
(Prof. Giuseppe COLZANI)

HEAD OF ISMA - ROMA
(Prof. Alfio CAMMILLI)

Text and graphics processed by: P.a. Gianluigi ROZZONI
Software written by: Ing. Giampaolo GIACOMETTI