ISTITUTO SPERIMENTALE PER
LA MECCANIZZAZIONE AGRICOLA
SEZIONE DI TREVIGLIO

CASE INTERNATIONAL 2150 E "4WD"
TEST no. 051.

O.E.C.D. no. 1281

Test in accordance with the O.E.C.D. Restricted Standard Code for the official testing of agricultural tractors.



Report test of: CASE INTERNATIONAL 2150 E "4WD"

Submitted for test by: JI CASE GmbH
Industriestr. 39-40, 4040 Neuss
GERMANY

Date of O.E.C.D. approval: 11.09.1990
Period of test: March 1990

ISTITUTO SPERIMENTALE PER
LA MECCANIZZAZIONE AGRICOLA
SEZIONE DI TREVIGLIO

O.E.C.D. no. 1281

Test in accordance with the O.E.C.D. Restricted Standard Code for the official testing of agricultural tractors.



Report test of: CASE INTERNATIONAL 2150 E "4WD"

Submitted for test by: JI CASE GmbH
Industriestr. 39-40, 4040 Neuss
GERMANY

Date of O.E.C.D. approval: 11.09.1990
Period of test: March 1990

ISMA - SOP Treviglio - Via Milano,43 - (BG) - ITALY

TABLE OF CONTENTS

- Specification of tractor ..... page 3
- Power take-off performance ..... page 20
- Power lift and hydraulic power test ..... page 24
- Drawbar performance ..... page 25

All stated dimensions and tests referred to tyre sizes 10.5/18 (6 ply) at front and 14.9/28 (6 ply) at rear, as well as to track widths 1098 mm at front and 998 mm at rear.

- Tractor manufacturer
. Name: JI CASE GmbH;
. Address: Industriestr. 39-40, 4040 Neuss GERMANY;
- Location of tractor assembly: CARRARO S.p.A. ROVIGO ITALY;
- Submitted for test by: the manufacturer;
- Selected by: the manufacturer with the agreement of ISMA;
- Place of running in: Campodarsego (PD) - ITALY;
- Duration of running: 50 hours.
- Location of test: I.S.M.A. Via Milano, 43 - Treviglio (BG) ITALY

I - SPECIFICATION OF TRACTOR

TRACTOR

- Make: CASE INTERNATIONAL;
- Model: 2150 E "4WD";
- Type: Wheeled tractor, unit construction, all wheels drive tractor;
- Number of driving wheels: 4;
- Serial number: CGC 58802529, Code: 588 ABAGAE;
- First serial number: CGC 58800001, Code:588 ACAGAE.

ENGINE

- Make: SAME;
- Model: 1000.4A/75;
- Type: aircooled 4 stroke diesel engine direct injection;
- Serial number: 17110.

Cylinders

- Number/disposition: 4, vertical in line;
- Bore/stroke: 105/115,5 mm;
- Capacity: 4000 cm^3;
- Compression ratio: 17.1 / 1;
- Arrangement of valves: overhead;
- Cylinder liners: without liners.

Supercharging none.

Fuel system

- Fuel feed system: AC corone fuel feed pump;
- Make, model and type of fuel filter: FIAMM FNA 160/00 ;
- Capacity of fuel tank: 60 dm^3 ;
- Make, model and type of injection pump: BOSCH PFR 1K 90A 503, immersed pump, one per cylinder, without serial number, in line injection pump;

- Manufacturer's production setting of injection pump:
  .flow rate: 59+/-2 mm^3 /stroke at rated speed and full load corresponding to 16.18 dm^3/h;
  .timing: 18+/-0.5 before TDC;
- Make, model and type of injectors: BOSCH KBE 58 S 4/4;
- Injectors pressure: 18 +/-1 MPa.

Governor

- Make: SAME;
- Model: 065.1652.4;
- Type: mechanical variable speed;
- Governor range of engine speed: from 675 to 2532 rev/min.;
- Rated engine speed: 2350 rev/min.

Air cleaner

- Main filter
  . make: VF VIRGIS;
  . model: 1967771C1;
  . type: dry paper element filter;
  . location: behind of engine;
- Maintenance indicator: with the warning lamp on the dashboard;

Lubrication system

- Type of feed pump: forced feed from gear pump;
- Total oil capacity including filter: 9.2 dm^3 ;
- Oil change period: 150 hrs;
- Type of filter: FIAMM FT 4803 IN;
- Number: 1;
- Filter change period: 300 hrs;
- Oil specifications: see page 18.

Cooling system

- Type and detail: air cooling with axial blower;
- Specification of fan: propeller fan driven by engine shaft;
- Number of fan blades: 13;
- Fan diameter: 250 mm;
- Type of temperature control: none.
- Warming indicator: with the warning lamp on the dashboard.

Starting system

- Make: BOSCH;
- Model: JF R 12 V;
- Type: electromagnetic engagement;
- Starter motor power rating: 3 kW;
- Safety device: preventig engine from starting in gear;
- Starting system for low temperatures: none.

Electrical equipement

- Voltage: 12 V;
- Generator:
  . make: BOSCH;
  . model: K1 R 14V 55A;
  . type: alternator;
  .power: 630 W;
- Battery: 1 lead acid;
  .capacity: 100 Ah at 20 hours.

Exhaust system

- Make: IMA SAF;
- Model: 153023iC1;
- Type: at chamber reflection absorption;
- Location: on the left hand side of engine cowling, vertical position;
- Height of outlet above ground: 2450 mm.

TRANSMISSION

Clutch: utilized only for travelling of tractor.

- Make: OMG;
- Model: 121947;
- Type: double disk dry clutch;
- Number of plates: 2;
- Plates diameter: 280 mm;
- Control system: by pedal for transmission, by lever for p.t.o.;

Gear box

- Make: CARRARO;
- Model: 121947;
- Type: mechanical no-syncromesh speed change gear;
- Arrangement: four speeds forward with three ranges of speed and one reverse group;
- Number of speeds : 12 forward and 12 reverse;
- Available options: 8 forward and 8 reverse.

Rear axle and final drives

- Make: CARRARO;
- Model: 121266/1;
- Type: bevel gear differential and epicyclic reduction final drives.

Differential lock

- Make: CARRARO;
- Model: 121266/1;
- Type: mechanical;
- Control system: engaged or disengaged by pedal.

Front axle and final drives

- Make: CARRARO;
- Model: 121310;
- Type: central shaft with bevel gear drive, differential and epicyclic reduction gear final drives.

Differential lock

- none

Transmission lubrication

- Gear box, rear axle, final drives, power lift and hydraulic system (in common);
  . total capacity including filter: 38 dm^3 ;
  . change period: 1000 hrs;
  . filter change period: 1000 hrs;
- Front axle and final drive:
  . total capacity: 5.1 dm^3 ;
  . change period: 1000 hrs;

- Recommended oil: see page 18.

Total rations and speeds

Gear	Group	Number of engine revolutions for one revolution of the driving wheels	Nominal travelling speed at a rated engine speed of 2350 rev/min (*) (km/h)
	FORWARD		
1	S	1140.223	0.50
2	S	769.196	0.74
3	S	526.198	1.08
4	S	374.442	1.51
1	N	244.283	2.32
2	N	164.982	3.44
3	N	112.753	5.03
4	N	80.238	7.07
1	F	56.375	10.06
2	F	38.071	14.89
3	F	26.019	21.79
4	F	18.516	30.62
	REVERSE		
1	S	1359.167	0.42
2	S	917.696	0.62
3	S	627.336	0.90
4	S	446.429	1.27
1	N	291.274	1.95
2	N	196.702	2.88
3	N	134.432	4.22
4	N	95.668	5.93
1	F	67.216	8.43
2	F	45.393	12.49
3	F	31.023	18.27
4	F	22.077	25.68

(*) Calculated with a tyre dynamic radius index of 640 mm.
ISO 4251/1 - 1984)
- Number of revolutions of front wheels for one revolution of rear wheels: 1.5367.

POWER TAKE-OFF

Power take-off proportional to engine speed

- Type: independent, at rear of tractor, in tractor's median plane, engaged or disengaged by hand lever.
  Driven by multiplate wet clutch independent from travel clutch; ISO Standard 500-1979.
- Number of shafts: 1;
- Method of changing of speed: speed selection by external hand lever;
- Location : at rear of tractor;

	P.T.O.
- Height above ground (with tyre size 14.9/28) ..	640 mm
- Distance from the median plane of the tractor ..	0 mm
- Distance behind rear axle.....	387 mm
- Direction of rotation (viewed facing driving end):	clockwise

1) 540 rev/min

- Dimension: ISO Standard 500-1979 type 1 (35 mm - 6 splines);
- PTO speed at rated engine speed .....: 600 rev/min;
- Engine speed at standard power take-off speed: 2115 rev/min;
- Ratio of rotation speeds (engine speed/pto speed): 3.916666;
- Maximum power and torque transmissible: 55 kW and 97 daNm.

2) 1000 rev/min : none.

- Dimension: ISO Standard 500-1979 type 2 (35 mm - 21 splines);
- PTO speed at rated engine speed .....: 1116 rev/min;
- Engine speed at standard power take-off speed: 2105 rev/min;
- Ratio of rotation speeds (engine speed/pto speed): 2.105734;
- Maximum power and torque transmissible: 55 kW and 52 daNm.

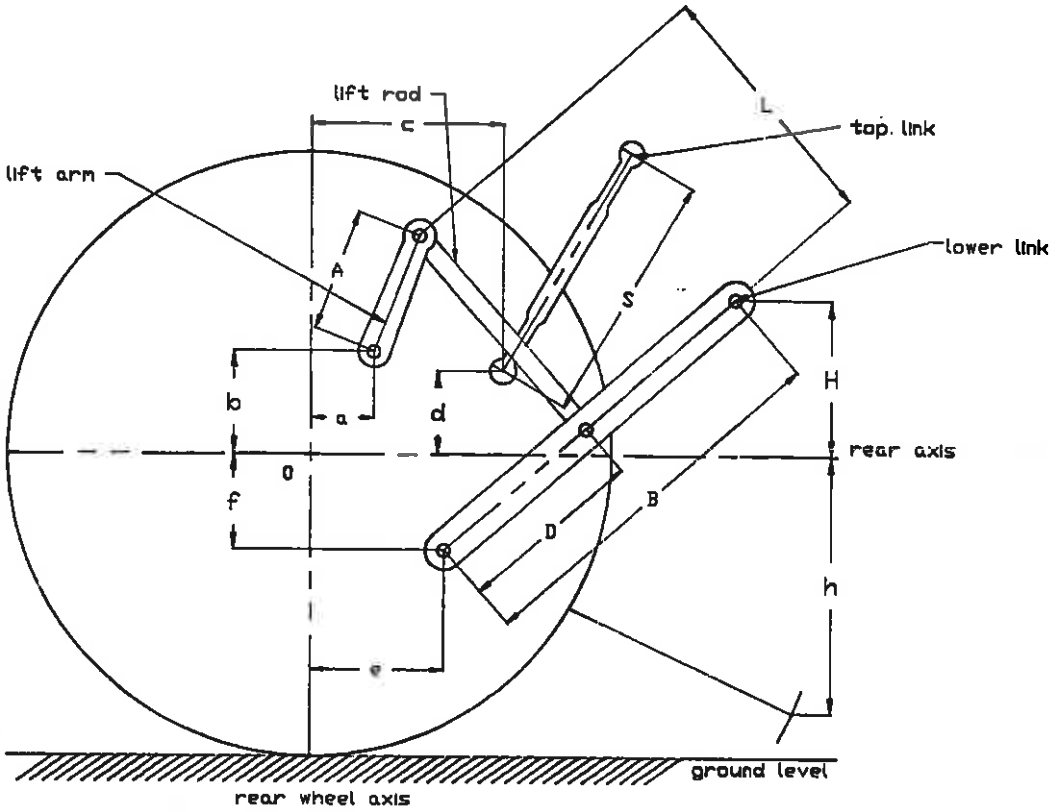
Power take-off proportional to ground speed : none.

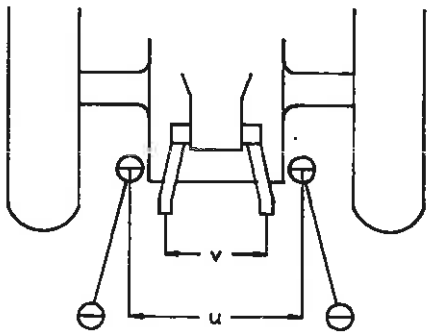
POWER LIFT

- Make: MITA;
- Model: M 60 SRF;
- Type: load sensing;
- Type of hydraulic system: open centre system;
- Type and number of cylinders: 1 internal hydraulic jack at single effect;
- Type of lock for transport: mechanical, with screwed tie rods that lock the lower links;
- Relief valve pressure setting: 18 +/- 1 MPa;
- Opening pressure of anti-shock valve: 20 MPa;
- Lift pump type: hydraulic rotary pump, driven by engine shaft;
- Transmission between pump and engine: mechanical;
- Type and number of filters: 1, repeaceable paper cartridge;
- Changing: when the filter clogging warning lamp is lighted;
- Oil capacity: 38 dm^3 in common with gear box;
- Site of oil reservoir : gear box;
- Position, type and No. of additional oil plugs: 4 ways distributor at rear of tractor;
- Maximum volume of oil available to external cylinders: 4 dm^3 ;
- Recommended oil: see page 18.

Three-point linkage

- Category: 1 in conformity with ISO 730/1 - 1977;
- Category adapter: none .


lift rod
c
L
top. link
lift arm
lower link
A
S
H
b
a
d
rear axis
0
f
B
D
h
e
ground level
rear wheel axis


v
u

Dimensions of linkage geometry (when connected to the standard frame)

		Dimension or range (mm)	Settings used in test (mm)
Length of lift arms	(A)	260	260
Length of lower links	(B)	848	848
Distance of lift arm :horizontally	(a)	25	25
Pivot point from rear :vertically	(b)	306	306
wheel axis (behind)			
Horizontal distance between the 2 lower link points	(u)	479	479
Horizontal distance between the 2 lift arm and points	(v)	375	375
Length of upper link	(S)	from 500 to 780	683
Distance of upper link :horizontally	(c)	244	244
pivot point from rear :vertically	(d)	261	261
wheel axis			
Distance of lower link :horizontally	(e)	72	72
pivot point from rear :vertically	(f)	192	192
wheel axis			
Distance of lower link pivot point to lift rod pivot points on lower links	(D)	496	496
Length of lift rods	(L)	from 500 to 670	620
Height of lower hitch points relative to the rear wheel axis			
- in Low position	(h)	from 179 to 551	440
- in High position	(H)	from 37 to 297	120
Height above ground of lower hitch points when locked in transport position (*)			760

(*) Assuming the dynamic radius index = 640 mm (ISO 4251/1 - 1984)

SWINGING DRAWBAR : not fitted.

HOLED DRAWBAR : not fitted.

TRAILER HITCH

- Type: J.I CASE;
- Hole diameter: 28 mm;
- Height above ground: 403 min. - 763 max. mm;
- Distance of hitch point from rear wheel axis, horizontally: 515 mm;
- Distance of hitch point from power take-off shaft end
  . vertically : below 237 mm, above 122 mm;
  . horizontally : 130 mm;
- Maximum vertical permissible load: 1471 daN.

STEERING

- Specification: hydrostatic steering with SAVER SUNDESTRAND gear pump, one steering cylinder at double effect acting directly on front axle.
- Make: DANFOSS;
- Model: OSPC 80 LS with priority valve OLSA 40;
- Type: hydrostatic;
- Working pressure: 1.1 MPa;
- Oil capacity: 17 dm³, in common whit hydraulic system;
- Oil change period: 1000 hrs;
- Filter change period: 1000 hrs;
- Recommended oil: see page 18.

BRAKES

Service brake

- Make: SIRMAC;
- Model: 1967573C1;
- Type: oil immersed multiplate disc, 4 per side total 8 discs, mounted before each epicyclic reduction gear. SK Welman HDT 303 lining material, rear disc diameter 165,25 mm;
- Method of operation: mechanical acting with 2 pedals;
- Trailer braking take-off: none.

Parking brake

- Type: mechanical acting on the service brake;
- Method of operation: mechanically by hand lever.

Steering brake : divided pedal of service brake for normal use locked together.

STEERING WHEELS

- Number: 2;
- Location : at front;
- Track widths: 1098 min. - 1280 max. mm;
- Regulation: changing the position of the rims with respect to the disc.

DRIVING WHEELS

- Number: 4;
- Location: 2 at front and 2 at rear;
- Rear track widths: 998 min. 1598 max. mm;
- Regulation: changing the position of the rims with respect to the disc.

WHEELBASE: 2075 mm.

ROLL - BAR

Specifications

- NFU approval number: 013701
- Make: CARRARO;
- Model: X 260-4;
- Type: tiltable;
- Manufacturer's name: CARRARO S.p.A.;
  . address: Via Olmo, 29 - Campodarsego (PD) ITALY;
- Protective device: roll-bar tiltable.

Materials used in the construction and dimensions

See N.F.U. (France) Test Report on Protective Structures.

DRIVER'S SEAT

- Make: SIFRA;
- Model: 15 M;
- Type: upholstered seat;
- Type of suspension: adjustable spring;
- Type of damping: shock absorber;
- Range of adjustment, longitudinal 210 mm;
  vertical ... 100 mm.

PASSENGER'S SEAT : none.

LIGHTING

Lighting system in accordance with E.E.C. 78/933

	Height above ground of centre with tyre (*) (mm)	Size (mm)	Distance from out side edge of tractor to centre at 998 mm track width (mm)
Headligths	1059	155*90	560
Front park. lights	1426	120*40	157.5
Front finger post	1446	120*40	157.5
Rear park. lights	1446	120*40	157.5
Rear finger post	1426	120*40	157.5
Stop	1446	120*40	157.5
Reflectors	1171	88*52	226.5

(*) Tyre size: 10.5/18 front - 14.9/28 rear.

TEST CONDITIONS

Overall dimensions with tyres 10.5/18 front and 14.9/28 rear

	Length (mm)	Width (mm) min	Width (mm) max	Height (mm) exaust sil.	Height (mm) at top of protect.struc.
Without ballast	3594	1371	1995	2450	2512

Ground clearance (unballasted tractor): 302 mm;
Clearance-limiting part: front axle.

Tractor mass (with tanks full, with frame, water in tyres none)

	Units	Front	Rear	Total
Without driver				
Without ballast	kg	1090	1180	2270
With ballast	kg	--	--	--
With driver				
Without ballast	kg	1100	1245	2345
With ballast	kg	--	--	--

Ballast

	no. of weights	total weight (kg)	water (kg)
front	-	-	-
rear	-	-	-
additional	-	-	-

Tyres and track width specifications

	front	rear
- Tyres		
. dimensions	10.5/18	14.9/28
. ply rating	6	6
. type	implement	radial
. maximum load (tyre manufacturer's) daN	1403	1579
. maximum load (tractor manufact.) daN	1103	1579
. inflation pressure (tyre manufact.) kPa	220	140
. dynamic radius index	425	640
- Chosen track width mm	1098	998
- Tyres on request	- pr	pr
	- pr	pr
	- pr	pr

Oils, lubrication and fuel
Capacity and change interval

	capacity dm³	oil change h	filter change h
Engine	9.2	150	300
Gear box	38	1000	1000
Front axle and final drives ...	5.1	1000	-
Rear axle and final drives	in common with gear box		
Hydraulic system	"	"	
Other (steering, etc.)	"	"	

Fuel and lubricants recommended and used in tests

Fuel
- Type: AGIP DIESEL, DIN 51601;
  (in accordance with the national standard)
- Specific gravity at 15° C: 0.832 g/cm³.

Engine oil
- Type: AGIP 15/W40 Super Diesel;
- Viscosity: 15.6 cSt;
- Classification: API SE-CD.

Transmission oil

	front axle and final drive	rear axle, final drive and gear box
-Type -Viscosity -Viscosity index -Classification	ELF BF12 10.50 cSt 146	ELF BF12 10.50 cSt 146

Hydraulic fluid
- Type: ELF BF12;
- Viscosity: 10.50 cSt;
- Classification:

Steering oil
- Type: ELF BF12;
- Viscosity: 10.50 cSt;
- Classification:

Grease
- Type: ESSO BEACON 2;
- Number of lubrication points: 15.

II - TEST RESULTS

A. COMPULSORY TESTS RESULTS

(1) MAIN POWER TAKE-OFF PERFORMANCE

- Date and location of test: 22.03.1990 - I.S.M.A. TREVIGLIO (BG) ITALY
- Type of dynamometer: ZOELLNER 350 AC

wer	Speed		Fuel consumption			Specific
	Engine	P.T.O.	Hourly	Specific		Energy
kW	rev/min	rev/min	l/h	kg/h	g/kWh	kWh/l
MAXIMUM POWER - 2 HOUR TEST						
52.2	2349	1116	16.18	13.46	258	3.23
POWER AT RATED ENGINE SPEED						
52.2	2349	1116	16.18	13.46	258	3.23
STANDARD POWER TAKE-OFF SPEED (1000 +/- 25 rev/min)						
51.3	2109	1001	15.59	12.97	253	3.29
PART LOADS						
i) The torque corresponding to maximum power at rated engine speed						
52.2	2349	1116	16.18	13.46	258	3.23
ii) 85% of torque obtained in i)						
45.1	2399	1139	13.62	11.33	251	3.31
iii) 75% of torque defined in ii)						
34.4	2435	1156	10.84	9.02	262	3.17
iv) 50% of torque defined in ii)						
23.1	2468	1172	8.55	7.11	308	2.70
v) 25% of torque defined in ii)						
11.6	2502	1188	6.11	5.08	438	1.90
vi) unloaded						
0	2532	1202	4.28	3.56	-	-

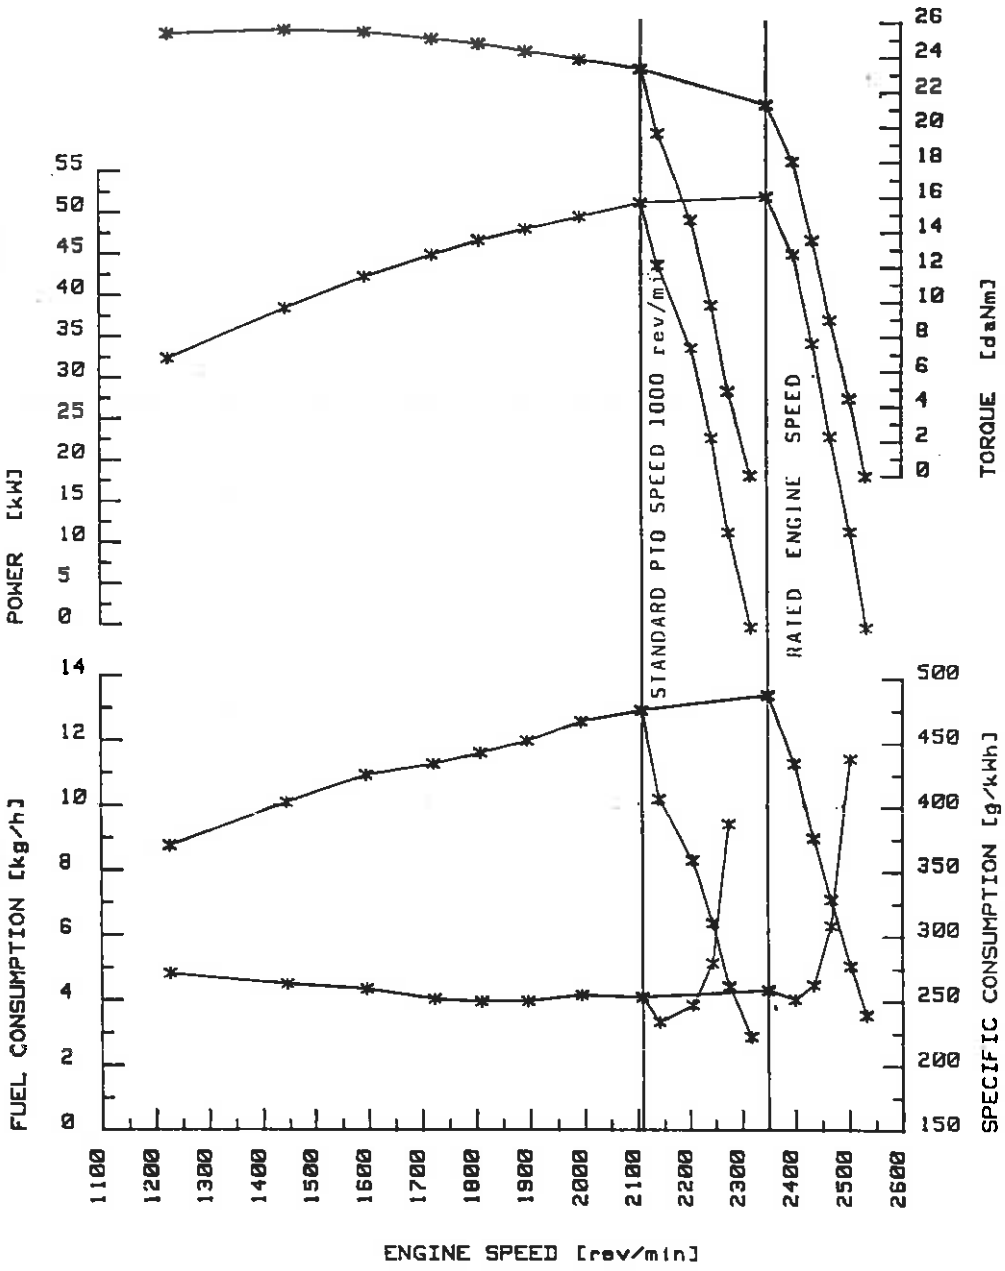
PART LOADS AT STANDARD POWER TAKE-OFF SPEED (1000 rev/min)

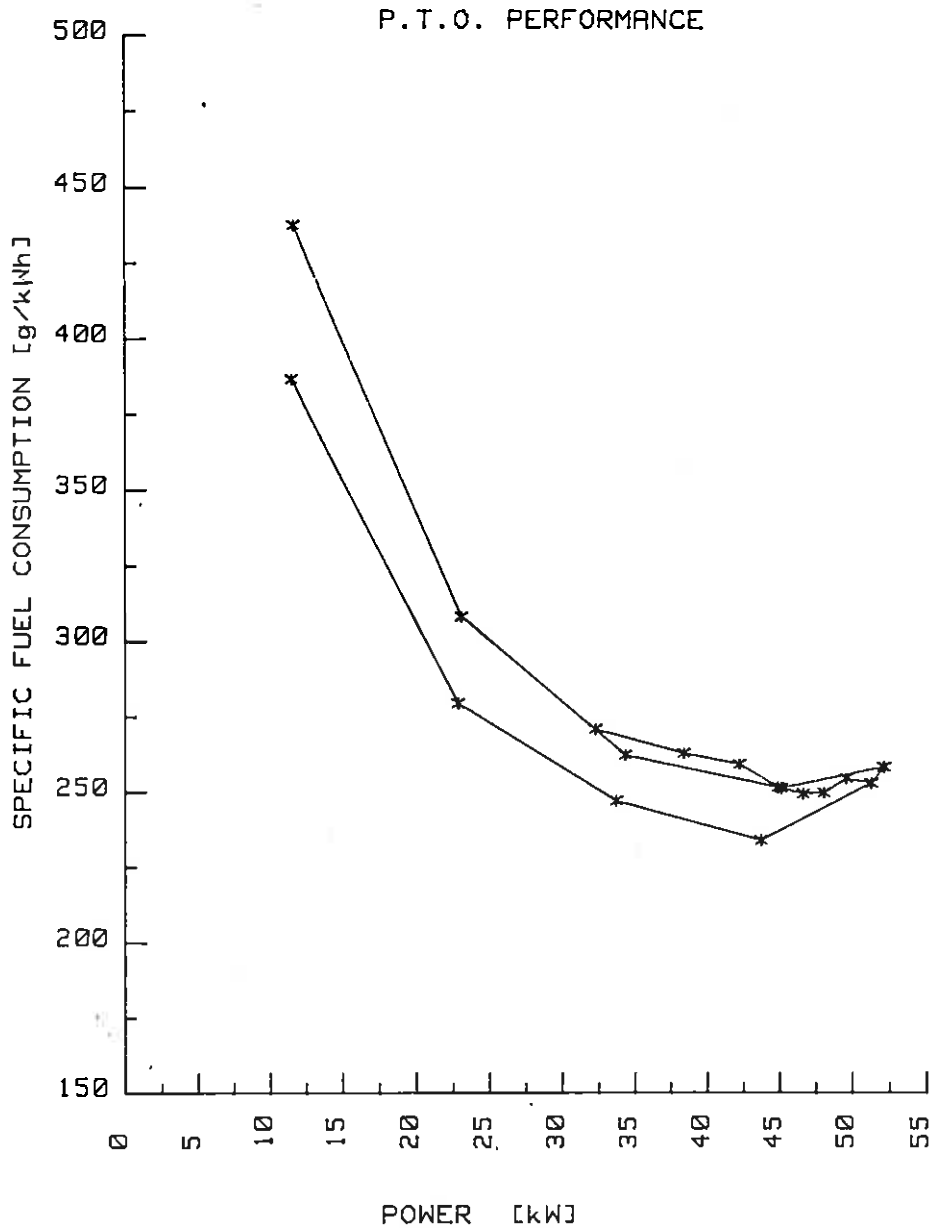
Power	Speed		Fuel consumption			Specific
	Engine	P.T.O.	Hourly		Specific	Energy
kW	rev/min	rev/min	l/h	kg/h	g/kWh	kWh/l
i) The torque corresponding to maximum power available						
51.3	2109	1001	15.59	12.97	253	3.29
ii) 85% of torque obtained at maximum power						
43.8	2141	1017	12.30	10.23	234	3.56
iii) 75% of torque defined in ii)						
33.8	2206	1047	10.02	8.34	247	3.37
iv) 50% of torque defined in ii)						
22.9	2244	1066	7.68	6.39	279	2.98
v) 25% of torque defined in ii)						
11.5	2276	1081	5.34	4.44	387	2.15
iv) unloaded						
0	2317	1101	3.46	2.88	-	-

STANDARD SPECIFIC FUEL CONSUMPTION: 251/308/234/279 g/kWh

- No load maximum engine speed: 2532 rev/min
- Torque (1) at maximum power: 21.22 daNm
- Maximum torque (1) (engine speed: 1446 rev/min) 25.40 daNm
- Mean atmospheric conditions: Temperature ..... 20 C°
  Pressure ..... 99.8 kPa
  Relat. humidity ... 77 %
- Maximum temperatures: Coolant ..... 97 C°
  Engine oil ..... 130 C°
  Fuel ..... 31 C°
  Engine air intake ..... 26 C°

(1) The torque is the equivalent crankshaft torque.


POWER [kW]
TORQUE [daNm]
FUEL CONSUMPTION [kg/h]
SPECIFIC CONSUMPTION [g/kWh]
STANDARD PTO SPEED 1000 rev/min
RATED ENGINE SPEED
ENGINE SPEED [rev/min]


P.T.O. PERFORMANCE
SPECIFIC FUEL CONSUMPTION [g/kWh]
500
450
400
350
300
250
200
150
0
5
10
15
20
25
30
35
40
45
50
55
POWER [kW]

) POWER LIFT AND HYDRAULIC POWER TEST

- Date and location of tests:23.03.1990 - ISMA Treviglio (BG)

2.1 POWER LIFT

		at hitch point	on the frame
Height of lower hitch point above ground in down position	mm	200	200
vertical movement	mm	560	581
Maximum corrected force exerted trough full range	daN	2675	2256
Corresponding pressure of hydraulic fluid	MPa	17.5	17.5
Moment about rear axle	daNm	2461	3452
Maximum tilt angle of mast over range of lift	degress	--	2

Lifting heights relative to the horizontal lower links											
mm	-247	-200	-100	0	100	200	300	312	333	400	500
Lifting forces at hitch points											
daN	2675	2693	2715	2762	2771	2703	2693	2678	--	--	--
Lifting forces at test frame											
daN	2845	2807	2698	2619	2458	2340	2266	--	2256	--	--

2.2) HYDRAULIC POWER TEST

Sustained pressure with relief valve open: 18.5 MPa;
Pump delivery rate at min pressure:38.8 l/min;

Hydraulic power	kW	flow rate l/min	pressure MPa	oil temp. °C
At 90% of the actual relief valve setting	9.7	37.1	16.0	65
Maximum	10.3	37.0	17.0	65

. opening pressure of the relief valve: 16.0 MPa

Tapping point used for test : at rear of tractor;
Hydraulic fluid: see page 18.

3) DRAWBAR PERFORMANCE

- Date of test: 23.03.1990
- Type of track: concrete
- Type and size of tyres front: 10.5/18 - 6 ply
  rear : 16.9/28 - 6 ply

Height of drawbar above ground: 460 mm (unballasted)

Tyre inflation pressure: unballasted .front: 220 kPa .rear: 140 kPa

3.1) MAXIMUM POWER IN TESTED GEARS (unballasted tractor)

Gear	Power	Draw. pull	Speed	Eng. speed	Slip of whell	Specific ener.cons.	fuel cool.eng.temp.			Atm. cond. hum.	pres
	kW	daN	km/h	rev/min	%	kWh/l	g/kWh	°C	°C	°C	%	kPa
1S	2.1	1898	0.4	2519	15	0.382	2190	23	55	91	22	73	100.3
2S	3.5	1795	0.7	2515	15	0.625	1343	23	55	93	22	73	100.1
3S	5.3	1928	1.0	2513	15	0.869	981	24	56	93	23	73	100.2
4S	7.8	1997	1.4	2508	15	1.130	731	26	55	94	23	71	100.1
1N	10.7	1934	2.0	2486	15	1.427	579	25	57	93	25	71	100.4
2N	15.6	1874	3.0	2479	15	1.734	481	26	57	93	25	72	100.3
3N	23.6	1935	4.4	2446	15	2.088	398	25	56	94	24	71	99.9
4N	29.9	1737	6.2	2420	15	2.121	391	27	56	94	25	70	100.0
1F	41.8	1693	8.9	2352	11	2.430	342	25	57	95	25	70	99.9
2F	42.5	1077	14.2	2350	4	2.471	336	25	56	95	26	70	100.2
3F	39.8	685	20.9	2347	3	2.341	355	26	56	93	26	71	100.3

4) TRANSMISSION AND FUEL CONSUMPTION CHARACTERISTICS

Gear	Power	Draw. pull	Speed	Eng. speed	Slip of wheel	Specific ener.cons.	fuel	Temperatures cool.eng.		Atm. cond temp.	hum.	pres
	kW	daN	km/h	rev/min	%	kWh/l	g/kWh	°C	°C	°C	°C	%	KPa
4( ) Selected gear at maximum power													
2F	42.5	1077	14.2	2350	4	2.471	336	25	56	95	26	70	100.0
4.1.1) 75% of pull at maximum power at rated speed													
2F	32.9	805	14.7	2405	3	2.367	353	24	53	93	26	70	99.9
4.1.2) 50% of pull at maximum power at rated speed													
2F	21.8	521	15.1	2441	2	1.832	454	24	55	94	25	71	99.9
4.1.3) next higher gear giving the same pull as in 4.1.1 red. eng. speed													
3F	32.9	807	14.7	1647	3	2.742	302	25	54	94	25	70	100.2
4) next higher gear giving the same pull as in 4.1.2. red. eng. speed													
3F	21.8	521	15.1	1675	2	2.180	381	24	54	93	25	70	99.8

Gear	Power	Draw. pull	Speed	Eng. speed	Slip of wheel	Specific ener.cons.	fuel cool.eng.temp.	Temperatures		Atm. cond hum.	pres
	kW	daN	km/h	rev/min	%	kWh/l	g/kWh	°C	°C	°C	°C	%	KPa
4.1) Selected gear nearest to 7.5 Km/h													
4N	29.9	1737	6.2	2420	15	2.121	391	27	56	94	25	70	100.0
4.1.1) 75% of pull at maximum power at rated speed													
4N	25.3	1303	7.0	2445	5	2.300	360	23	55	93	26	71	99.9
4.1.2) 50% of pull at maximum power at rated speed													
4N	17.5	865	7.3	2465	2	1.989	417	24	54	94	26	70	100.1
4.1.3) next higher gear giving the same pull as in 4.2.1 red. eng. speed													
1F	25.0	1307	6.9	1710	5	2.780	300	26	54	92	26	70	99.7
4.1.4) next higher gear giving the same pull as in 4.2.2 red. eng. spee_													
1F	17.8	868	7.4	1765	2	2.507	331	26	55	92	26	72	100.3

REPAIRS AND REMARKS: none.

TEST CARRIED OUT BY
(P.a. Giovanni LAMORATTA)

THE DIRECTOR OF TESTING STATION
(Prof. Giuseppe COLZANI)

HEAD OF ISMA - ROMA
(Prof. Alfio CAMMILLI)

Text and graphics processed by: P.a. Gianluigi ROZZONI
Software written by: Ing. Giampaolo GIACOMETTI