Testzentrum Technik und Betriebsmittel



REPORT on test in accordance with OECD No. 2/2335
OECD STANDARD CODE 2 for the 21st March 2006
Official Testing of Agricultural Tractor Performance

Agricultural Tractor

Challenger MT 565 B

Technical Type No.: F 44

Manufacturer
AGCO S.A., B.P. 60307, 60026 Beauvais, FRANCE

This is a report on a tractor test in accordance with OECD STANDARD CODE for the Official Testing of Agricultural Tractor Performance Code 2 (C(2003)252/FINAL).

It does not contain an evaluation of the tractor on practical work.

Duration of tests: April till June 2005

DLG-Test Centre Technology and Farm Inputs, Max-Eyth-Weg 1,
D-64823 Gross-Umstadt

This report has been approved by the OECD Co-Ordinating Centre (CEMAGREF, France) as being in accordance with the OECD STANDARD CODE.

Date of approval: 21st March 2006 OECD No.: 2/2335

Remark: The test of the Challenger MT 565 B tractor was performed with the Challenger MT 555 B tractor (DLG test no.: 2005-061).
Details see section "6. Remarks", page37.

Statement

The information opposite each item has been validated by the Testing Station. An item marked [C] indicates to the test report user that the information declared by the manufacturer has been checked; an item marked [D] indicates that the manufacturer's declaration has been endorsed.

All rights including the right of translation, reprint and photo-mechanical copying - also of excerpts - reserved by the editor.
Printed in Germany, May 2006
DLG-No. 388

TABLE OF CONTENTS

		Page
1	SPECIFICATIONS OF TRACTOR	4 to 18
2	TEST CONDITIONS	19 to 21
3	COMPULSORY TESTS	
3.1	Main power take-off	22 to 26
3.2	Hydraulic power and lifting force	27 and 28
3.3	Drawbar power and fuel consumption of unballasted tractor	29 to 31
4	ADDITIONAL TESTS	32
4.1	Drawbar power and fuel consumption of unballasted tractor with dual wheels	32 to 35
4.2	Power Lift Test with short lift rods (maximum lift capacity)	36
5	REPAIRS	37
6	REMARKS	37

[C]	Tractor manufacturer's name and address:	AGCO S.A. ZA n°2 BP 60307, Avenue Blaise Pascal 60026 Beauvais Cedex, FRANCE
[C]	Location of tractor assembly:	60026 Beauvais Cedex, FRANCE
[D]	Submitted for test by:	Manufacturer
[C]	Selected for test by:	Manufacturer with agreement by DLG
[D]	Place of running-in:	Beauvais and Gross-Umstadt
[D]	Duration of running-in:	59 h
[C]	Location of test:	DLG-Testing Station, D-64823 Gross-Umstadt

1 SPECIFICATIONS OF TRACTOR

1.1 Identification

1.1.1

[C]	- Make:	Challenger
[C]	- Model:	MT 565B
[C]	- Type:	4WD, wheel tractor, unit construction

1.1.2 Numbers

[D]	- 1st serial No.:	P003001
[C]	- Serial No.:	N009101

1.1.3 Other specifications:

[C]	- Transmission version:	CVT, 40 km/h
[D]	- Engine version:	exhaust emission according to TIER2, EPA and guideline 2000/25/EG
[D]	- Technical type number:	F 44

1.2 Engine

[C]	- Make/Model/Type:	Caterpillar / 3056E DITAAC / water-cooled 4-stroke Diesel-engine, direct injection, supercharged and intercooler (air to air),
[C]	- Serial No.:	207-1097 33.40.38.08

1.2.1	Cylinders	
[C]	- Number/disposition:	6 / vertical in line
[D]	- Bore/stroke:	100 mm / 127 mm
[D]	- Capacity:	5985 cm^3
[D]	- Compression ratio:	17.5 ± 1 : 1
[D]	- Arrangement of valves:	Overhead valves, 2 per cylinder
[D]	- Cylinder liners:	Wet
1.2.2	Supercharging	
[C]	- Make / Model / Type:	BORG WARNER / S200 / exhaust driven supercharger with air to air intercooler
[D]	- Pressure	Max. 140 kPa
1.2.3	Fuel system	
[C]	- Fuel feed system:	1 diaphragm fuel supply pump
	- Fuel filter	
[D]	Make/Model:	STANADYNE / fuel manager
[C]	Type :	2 replaceable paper element filter
[D]	- Capacity of fuel tank:	380 dm^3
	- Injection pump	
[C]	Make/Model:	BOSCH / VP 30 – 0470 006 002
[D]	Type:	Rotary
[D]	Serial no.:	N.A.
[C]	Manufacturer's production setting:	94 ± 3 mm^3/stroke at full load and rated speed;
[C]	Flow rate:	37 ± 0.8 dm^3/h at 2200 min^{-1} and full load
[D]	Timing:	electronically controlled
	- Injectors	
[D]	Make/Model:	BOSCH / DSLA 14 PV3 384 467
[D]	Type :	2645F027
[D]	Injection pressure:	27 ± 0.8 MPa
1.2.4	Governor	
[D]	- Make/Model/Type:	BOSCH / - / electronically driven all speed governor
[C]	- Governed range of engine speed:	800 to 2240 min^{-1}
[C]	- Rated engine speed:	2200 min^{-1}

1.2.5	Air cleaner	
	- Pre-cleaner	
[C]	Make/Model:	DONALDSON / -
[C]	Type:	Cyclone, aspirated, pre-cleaner integrated in housing of main cleaner
[C]	Location of air intake:	on the superior hood
	- Main cleaner	
[C]	Make/Model:	DONALDSON / FRG 130193
[C]	Type:	Dry paper element filter with additional safety cartridge
[C]	- Maintenance indicator:	Warning light on dashboard
1.2.6		
	Lubrication system	
[D]	- Type of feed pump:	Gear pump
[D]	- Type of filter:	Full flow, replaceable paper cartridge
[D]	- Number of filters:	1
1.2.7		
	Cooling system	
[C]	- Type of coolant:	Water-anti-freeze mixture
[C]	- Type of pump:	Centrifugal pump
[C]	- Specification of fan	BWCS viscous drive fan, belt driven, variable fan speed controlled by air flow temperature
[C]	Number of fan blades:	9
[C]	Fan diameter:	550 mm
[D]	- Coolant capacity:	28.5 dm^3
[D]	- Type of temperature control:	thermostat
	- Superpressure system:	50 kPa

1.2.8	Starting system	
[D]	- Make/Model/Type:	ISKRA / AZF / electrical, solenoid pre-engaged drive starter motor
[D]	- Starter motor power rating:	3 kW
[C]	- Cold starting aid:	Grid heater
[C]	- Safety device:	Starter only operating when clutch pedal depressed
1.2.9	Electrical system	
[C]	- Voltage:	12 V, negative earth
	- Generator:	
[C]	Make/Model/Type:	ISKRA / AAK 5379 3-phase alternator
[D]	Power:	1680 VA
[C]	- Battery:	2 lead acid battery, 12 V / 420 Ah rating at 20 hours
1.2.10	Exhaust system	
[C]	- Make/Model/Type:	AGCO S.A. / 0040 / absorption-reflection type silencer, round 168 mm dia, 1340 mm long
[C]	- Location:	Vertical stack at right A-post of cab, mouth showing upward / forward to the right
1.2.11		
[D]	Operating hours meter:	Electronic, counts real hours when engine is running

1.3 Transmission

1.3.1		
[D]	Clutch	No clutch in usual sense, pedal fitted, controls the oil flow in hydrostatic drive by valve

Challenger MT 565 B **DLG-Test No. 2005-062**

1.3.2 Gear box

[D]	- Make:	FENDT
[D]	- Model:	ML 160
[D]	- Type:	Continue variation transmission with variable power branching in a hydrostatic and a mechanic branch
[D]	- Power flow:	From crankshaft via torsional-vibration damper and primary shaft to the planetary-gear carrier of via the internal gear to the hydrostatic part, and via the sun gear to the mechanical part; both power branches are rejoint on a summation shaft and transmitted by a 2 step range gear to the rear axle
[D]	- Hydrostatic branch:	Acts as travel clutch, as infinitely variable gearbox and as reversing gear; is composed of a variable displacement axial-piston pump and an adjustable axial-piston motor; the axial-piston pump, driven by internal gear of planetary gear train, is hydrostatically coupled to the axial-piston motor; both are adjusted in common according to the following scheme

Travel speed	Displacement angle [°]	
	pump	motor
Min	0	45
Max	45	0

[D] - Mechanical branch: Consists of planetary gear train and of 2-step range gear (primary shaft of range gear simultaneously serves as summation shaft); the sun gear of planetary gear train propels the summation shaft; electromechanical change of travelling ranges at travelling speed below 2 km/h by push button

range		travel speed [km/h]	
		forward	reverse
I	heavy use	0-28	0-18
II	fast transport	0-40	0-19

Challenger MT 565B **DLG-Test No. 2005-062**

[D]	- Operation:	Power shuttle (located to the left of steering wheel) which controls following functions: - declutching gearbox in position "neutral" - quick reversing (change of driving direction) - the operating speed of gear ratio change may be varied in 4 steps - continuous change of transmission ratio - forward and reverse Hand lever in the right armrest which controls following functions: - continuous change of transmission ratio - forward and reverse Buttons and switches in the right armrest and the right panel which control following functions - automatic control of travelling speed (cruise control) - change of range turtle-rabbit - engine under-speed supervisor - Various control modes
[C]	- Lubrication:	Oil circuit in common with rear axle drive, air-oil cooler in front of engine water cooler; 1 oil filter in suction line 1 oil filter in pressure line

1.3.3 Rear axle and final drives

[D]	- Make/Model/Type:	FENDT / HA160 / bevel gear drive with bevel gear differential and planetary final drives
	- Differential lock:	
[D]	Type:	Multi-plate lock
[C]	Method of engagement/ disengagement:	Electro-hydraulically operated by switch, disengaged when brakes are actuated; indicator light

1.3.4	Front axle and final drives	
[C]	- Make/Model/Type:	CARRARO / 20.29S / 4WD axle, transmission via wet multi-plate clutch, shaft in median plane of tractor, bevel gear drive, differential with lock, planetary final drives ; clutch electro-hydraulically operated by non locking push button; suspended axle with hydro-pneumatic suspension, levelling control (suspension stroke ± 45 mm); suspension switchable to on-off by push buttons electro-hydraulically
	- Differential lock:	
[D]	Type:	Wet multi plate lock and additional limited slip multi plate lock
[D]	Method of engagement/ disengagement:	In common with rear axle differential lock, respectively automatic
1.3.5	Total ratios and travelling speeds:	Not applicable, ranges specified in 1.3.2
[D]	Number of revolutions of front wheels for one revolution of rear wheels:	1.345

1.4 Power take-off

1.4.1	Main power take-off	
[C]	- Type:	Independent
[C]	- Method of engagement:	Driven by wet multi-plate clutch with 178 mm dia, electro-hydraulically operated by push buttons; engagement speed controlled by actuation time of push button; additional remote control of p.t.o. clutch on rear mudguard
[C]	- Number of shafts:	1
[C]	- Method of changing power take-off shaft ends and speeds:	Flanged stub shaft, changeable; 3 speeds may be selected by push-button electro-hydraulically

1.4.1.1 Power take-off proportional to engine speed, 540 , 540E*) or 1000 min^{-1} p.t.o.
*) 540E: Economic type p.t.o. for reduced engine speed

[C]	- Location:	At rear of tractor
[C]	- Diameter of p.t.o. shaft end:	35 mm
[C]	- Number of splines:	6 (540, 540E min^{-1}) in conformity with ISO 500:1991, type 1 21(1000 min^{-1}) in conformity with ISO 500:1991, type 2
[C]	- Height above ground:	875 mm
[C]	- Distance from the median plane of the tractor:	0 mm
[C]	- Distance behind rear wheel axis:	510 mm

	P.t.o. type	P.t.o. transmission ratio	P.t.o. speed min^{-1}	Engine speed min^{-1}	Power restriction kW	Max. torque transmissible Nm
[D]	540	3.82	540 576	2062 2200	75 kW	not specified
[D]	540E	2.94	540 748	1588 2200	75 kW	not specified
[D]	1000	2.03	1000 1083	2030 2200	not specified	

[C] - Direction of rotation (viewed from behind tractor): Clockwise

1.4.1.2

[D] Power take-off proportional to ground speed: None

1.4.2

[D] Optional power take-off: Front p.t.o., independent, not fitted to tractor

1.5 Hydraulic power lift

[C]	- Make/Model:	AGCO / -
[C]	- Type:	electronic-hydraulic power lift at rear, desintegrated construction

Challenger MT 565 B **DLG-Test No. 2005-062**

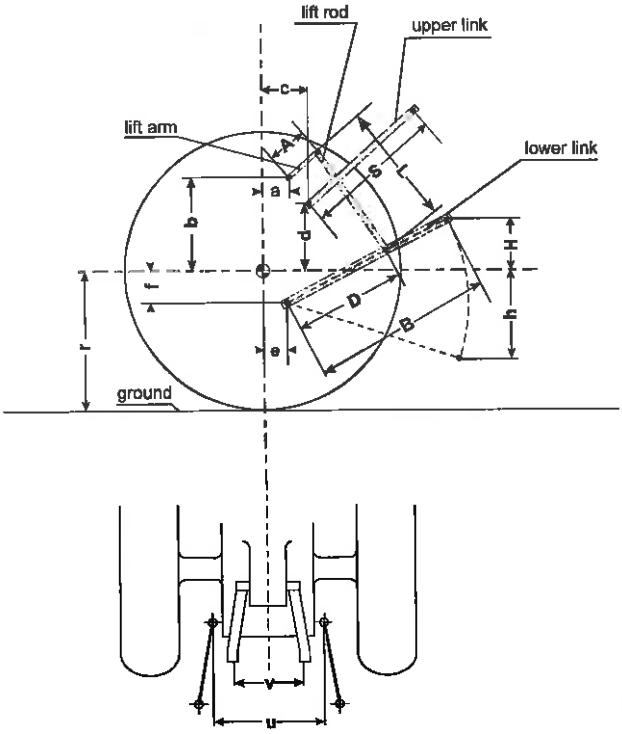
[C]	- Hydraulic system:	Closed, load sensing, pressure and flow compensated system; supplies rear and front power lift including additional control valves and steering system
[C]	- Rear power lift:	external push buttons left and right on rear mudguards; draft, position and intermixable control; floating position, fast raising (switch with transport lock and button for "vibration damping"), raise limit, lowering throttle, lower link sensing
[C]	- Front power lift:	Optional, not fitted to tractor tested
[D/C]	- Type and number of cylinders:	2 external cylinders, double acting, piston 100 mm bore, tige 36 mm bore, 247 mm stroke
[C]	- Type of linkage lock for transport:	Hydraulic, lowering throttle
[D]	- Relief valve pressure setting:	20.0 ± 1.0 MPa
[D]	- Opening pressure of cylinder safety valve:	23.0 + 1.9 MPa
	- Lift pump:	
[D]	- Make:	REXROTH
[D]	- Model:	A10VO45 DFR1/52 R
[D]	- Type:	Variable displacement axial-piston pump
[D]	- Transmission between pump and engine:	Independently driven by gear box
[C]	- Type and number of filters:	1, exchangeable filter in return line
[D]	- Site of oil reservoir:	Separate oil reservoir with 100 dm³ volume on right hand side below cab floor
[C]	- Type, number and location of tapping points:	Double acting, quick-action; 4 coupler-pairs with adjustable flow control and 1 coupler for low pressure return line at rear of tractor Optional: 1 pair of couplers at front of tractor
[D]	- Maximum volume of oil available to external cylinders:	60 dm³

1.6 Three-point linkage:

1.6.1 Three-point linkage at rear:

[C] - Category: 3, in conformity with ISO 730-1/1994 + Cor. 1:1995; with CBM quick couplers

[C] - Category adapter: None



	Dimensions of rear implement linkage			Projected lengths in mm		
				Dimensions	Settings used in test on page 28	36
[C]	Rear tyres 520/85 R 42 Front tyres 420/90 R 30		(r) *) (r') *)	920 695		
[C]	Length of lift arms		(A)	355		
[C]	Length of lower links		(B)	1030		
[C]	Distance of lift arm pivot points from rear wheel axis	horizontal vertical	(a) (b)	165 305		
[C]	Horizontal distance between the 2 lower link pivot points		(u)	470		
[C]	Horizontal distance between the 2 lift arm end points		(v)	535		
[C]	Length of upper link		(S)	from 670 to 960	805	830
[C]	Distance of upper link pivot point from rear wheel axis	horizontal vertical	(c) (d)	400 / 370 / 350 215 / 275 / 325	400 215	350 325
[C]	Distance of lower link pivot points from rear wheel axis	horizontal vertical	(e) (f)	145 255		
[C]	Distance of lower link pivot points from lift rod pivot points on lower links		(D)	600 / 665	600	665
[C]	Length of lift rods		(L)	from 665 to 790	740	665

Heights (h, H, H') of lower link hitch points relative to rear wheel axis (situated 920 mm above ground), at different adjustments of L

These data are valid for unloaded power lift

[C]	Length of lift rods	(L)	665	790	740	665
[C]	Linkage distance of lift rods	(D)	600 / 665		600	665
[C]	Lowest position	(h)	545 / 465	855/ 710	690	495
[C]	Highest position	(H)	210 / 215	15 / 25	150	240
[C]	Transport position	(H')	210 /215	15 / 25	150	240

*) Assuming r resp. r' = tyre dynamic radius index

1.6.2 [C]	Three-point linkage at front:	Not fitted	
1.7	**Swinging drawbar**		
[C]	- Type:	Longitudinally adjustable in three steps	
[C]	- Height above ground		575 mm
[C]	- Type of adjustment:	-	
[C]	- Distance of hitch point from rear wheel axis	Horizontal:	890 / 940 / 1040 mm
[C]	- Distance of hitch point from p.t.o. shaft end	Vertical: Horizontal:	300 mm 380 / 430 / 530 mm
[C]	- Lateral adjustment (centre of clevis)	Right/left hand side:	160 / 210 / 260 mm
[C]	- Distance of pivot point from rear-wheel axis, horizontally:		300 mm
[C]	- Diameter of drawbar pin hole:		30 mm
[D]	- Maximum permissible vertical load:		18 kN
1.8	**Trailer hitch**		
[C]	- Make/Model/Type:	ROCKINGER / 850 D 12 / automatically	
[C]	- Pin diameter:		30 mm
[C]	- Height above ground:	Centre of clevis adjustable in 5 steps to	910, 950, 990, 1030, 1070 mm
[C]	- Distance of hitch point from rear wheel axis, horizontally:		710 mm
[C]	- Distance of hitch point from power take-off shaft end		
	vertically:	above	35, 75, 115, 155, 195 mm
	horizontally:		200 mm
[D]	- Maximum permissible vertical load:		2000 kg
1.9	**Holed drawbar**	Optionally available, not fitted	

1.10	**Steering**	
[D]	- Make/Model/Type:	DANFOSS/ OSPD 80/205 ON + OVR / hydrostatic steering, acting on front wheels
[C]	- Method of operation:	By steering wheel and cylinder directly acting on steering levers
[D]	Pump:	Gear pump with 45.0 dm³/min delivery at rated engine speed (only if delivery of axial-piston pump of hydraulic circuit is ordered by control valves)
[D]	Ram:	1 integrated ram (symmetrical design) acting on steering levers; 270 mm stroke,75 mm bore and 38 mm dia of piston rod
[D]	- Working pressure:	15.0 MPa
1.11	**Brakes**	
1.11.1	Service brake	
[D]	- Make/Model/ Type:	FENDT & KNOTT / - / Pedal operated combined muscle / power braking system acting on both axles
	Rear axle brake:	Muscle power brake, 1 wet multi disc brake with 4 discs with 222 mm diameter each on left and right differential half shafts
	Front axle brake:	Power braking system, controlled by relay valve in brake circuit, hydraulically operated; 1 wet multi disc brake on drive shaft to front axle; 5 discs with 222 mm dia
[C]	- Method of operation:	Pedal operated, hydraulic transmission
[C]	-Trailer braking take-off:	None
1.11.2	Parking brake	
[D]	- Type:	Mechanical brake, acting on rear axle
[C]	- Method of operation:	Operated by lever

1.12 Wheels

[C] - Number

Front:	2, driving and steering
Rear:	2, driving

[C] - Wheelbase: 3007 mm

[D] - Track width adjustment:

	Minimum mm	Maximum mm	Adjustment method
Front	1640	1984	adjustable gauge-bowl rims
Rear	1690	2020	adjustable gauge-bowl rims

1.13 Protective structure

[C] - Make/Model/Type: MASSEY FERGUSON / 6033 H2 / Cab

[C] - Manufacturer's name and address: AGCO S.A., ZA N°2 BP 60307
Avenue Blaise Pascal, 60026 Beauvais Cedex
FRANCE

- Protective device

[C] Cab: Safety cab with integrated safety frame; welded and screwed profile steel tube construction, mounted on antivibration silent blocks in front; suspended in the rear; 1 door and 3 steps each at the left and right side; rear window and side window to open; water-heating, ventilation system, air conditioner

[C] Tiltable / not tiltable: Not tiltable

- OECD approval

[D] Approval number: 4/0 850/2

[D] Date of approval: 21st February 2006 (extension report)
22nd July 2004 (original report)

[D] Nos. minor modification certificates, if any: 2

1.14 Seat

1.14.1	Driver's seat	Fitted to tractor
[C]	- Make/Model:	Grammer / MSG 95 AL / 741
[C]	- Type:	Air suspended upholstered seat with backrest and armrests
[C]	- Seat and steering wheel reversible:	No
[C]	- Type of suspension:	Pneumatic
[C]	- Type of damping:	Hydraulic
	- Range of adjustment	
[C]	Longitudinal:	220 mm
[C]	Vertical:	430 to 600 mm
[C]	- Safety belt:	Yes
1.14.2	Optional driver's seats	
[D]	- Make/Model/Type:	Grammer / MSG 85/731; MSG 95A/731; MSG 95G/731 / mechanical suspension or pneumatic suspension
1.14.3	Passenger seat:	
[C]		Optional, fitted to tractor tested

1.15 Lighting

Electrical, 12 Volt, according to US legislation

		Height above ground of centre mm	Size mm	Distance from outside edge of lights to median plane of tractor mm
[C]	Headlights	1440	Ø 120	190
[C]	additional Headlights	2900	70 x 120 oval	520
[C]	Side Lights	2170	110 x 30	1000
[C]	Rearlights	2030	Ø 120	1010
[C]	Reflectors, 1st pair	2020	Ø 55	887
	2nd pair	1000	50 x 100	550

2. TEST CONDITIONS

2.1 Overall dimensions

	Length	Width (track width as in 2.5)	Height at top of	
			protective structure	exhaust silencer pipe
	mm	mm	mm	mm
Unballasted	4900	2530	3100	3095

2.2 Ground clearance

480 mm

- Clearance-limiting part: Bracket of swinging drawbar

2.3 Tractor mass

- Unballasted (with cab)

	Without driver kg	With driver kg
Front	2610	2635
Rear	3885	3935
Total	6495	6570

2.4 Track specifications

Not applicable

2.5 Tyres and track widths specifications

	Front	Rear
Tyres:	MICHELIN Agribib	MICHELIN Agribib
- Dimensions	420/90 R 30	520/85 R 42
- Load index speed index	147 A8	157 A8
- Type	radial	radial
- Maximum load (tyre manufacturer's)	26.50 kN*)	41.25 kN*)
- Maximum load (tractor manufacturer's)	26.50 kN	41.25 kN
at travelling speed	40 km/h	40 km/h
at tyre inflation pressure	160 kPa	160 kPa
dynamic radius index	695 mm	920 mm
Chosen track width:	1980 mm	2020 mm

*) With other tyres higher load capacity possible

2.6 Fuel

- Type: ARAL-Diesel-fuel, in conformity with DIN 51601
- Density at 15°C: At p.t.o. tests 0.8346 g/cm³
  at drawbar power tests 0.8328 g/cm³

2.7 Oils and lubrication

2.7.1 Capacity and change interval

	Capacity dm³	Oil change h	Filter-change h
Engine	20	400	400
Gear box and rear axle	58	2000	800/2000
Front axle	8.5	800	-
Rear axle	in common with gearbox		
Final drives (front each)	1.3	800	-
Final drives rear (each)	13	2000	-
Hydraulic system	100	1200	1200

2.7.2 Specifications:

	Specified	Used during test
Engine Type	BP Full-Year Engine oil	BP
Viscosity	SAE 10W/30, 10W/40 SAE 15W/30 or 15W/40	10W/40
Classification	API-CH4	API-CH4
Gearbox Rear axle drive Type	BP Super-Tractor-Oil-Universal STOU	BP
Viscosity	SAE 10W/40, 15W/40	10W/40
Classification	API-GL4	API-GL4
Rear axle final drives Type	BP Hypoid-Gear-Oil	BP
Viscosity	SAE 85W/90	85W/90
Classification	API-GL5	API-GL5
Front axle drive Front axle final drives Type	BP Hypoid-Gear-Oil	BP
Viscosity	SAE , 85W/140	85W/140
Classification	API-GL5	API-GL5
Hydraulic system Type	BP STOU	BP
Viscosity	SAE 10W/40	10W/40
Classification	API-CH4	API-CH4

2.7.3 Grease Multi purpose grease TERRAC CHARGE

- Number of lubrication points: 20

3 COMPULSORY TESTS

3.1 Main power take off performance

Date of tests: 2005-04-19
Location of tests: DLG-Testing Station Groß-Umstadt
Type of dynamometer: SCHENCK hydraulic dynamometer U1-40

Power	Speed		Fan	Fuel consumption			Specific
	Engine	P.t.o.		hourly		specific	energy
kW	min^{-1}	min^{-1}	min^{-1}	kg/h	dm^3/h	g/kWh	kWh/dm^3
Maximum power							
3.1.1 At 2-hour test							
114.2	1999	983	2205	30.40	36.50	266	3.13
3.1.2 At rated speed							
108.6	2199	1081	2262	30.66	36.82	282	2.95
3.1.3 At standard p.t.o. speed							
113.5	2034	1000	2222	30.63	36.78	270	3.09
3.1.4 Part loads, the governor hand lever in the position corresponding to maximum power at full load (curve a)							
3.1.4.1 the torque corresponding to maximum power at rated speed							
108.6	2199	1081	2262	30.66	36.82	282	2.95
3.1.4.2 85% of the torque obtained in 3.1.4.1							
92.5	2207	1085	2390	26.96	32.37	291	2.86
3.1.4.3 75% of the torque defined in 3.1.4.2							
69.7	2215	1089	2266	21.85	26.24	313	2.66
3.1.4.4 50% of the torque defined in 3.1.4.2							
46.7	2223	1093	2163	16.93	20.33	363	2.30
3.1.4.5 25% of the torque defined in 3.1.4.2							
23.5	2231	1097	1682	11.86	14.24	505	1.65
3.1.4.6 unloaded							
-	2238	1100	1405	6.48	7.78	-	-

Power	Speed		Fan	Fuel consumption			Specific energy
	Engine	P.t.o.		hourly		specific	
kW	min^{-1}	min^{-1}	min^{-1}	kg/h	dm^3/h	g/kWh	kWh/dm^3
3.1.5	**Part loads, the governor hand lever in the position corresponding to standard p.t.o. speed at full load (curve b)**						
3.1.5.1	the torque corresponding to maximum power						
113.5	2034	1000	2222	30.63	36.78	270	3.09
3.1.5.2	85% of the torque obtained in 3.1.5.1						
97.1	2048	1007	2243	26.87	32.26	277	3.01
3.1.5.3	75% of the torque defined in 3.1.5.2						
73.3	2058	1012	2244	21.16	25.41	289	2.88
3.1.5.4	50% of the torque defined in 3.1.5.2						
49.1	2069	1017	2098	15.90	19.09	324	2.57
3.1.5.5	25% of the torque defined in 3.1.5.2						
24.6	2077	1021	1385	10.54	12.66	428	1.94
3.1.5.6	unloaded						
-	2084	1024	1391	5.64	6.77	-	-

OPTIONAL RESULTS

Power kW	Speed Engine min^{-1}	Speed P.t.o. min^{-1}	Fan min^{-1}	Fuel consumption hourly kg/h	Fuel consumption hourly dm³/h	Fuel consumption specific g/kWh	Specific energy kWh/dm³
3.1.6 Part loads at different engine speeds							
3.1.6.1 maximum power at rated engine speed							
108.6	2199	1081	2262	30.66	36.82	282	2.95
3.1.6.2 80% of power obtained in 3.1.6.1 at max. speed setting							
86.9	2209	1086	2261	25.22	30.28	290	2.87
3.1.6.3 80% of power obtained in 3.1.6.1 with governor control set to 90% of rated engine speed							
87.2	1983	975	2171	23.36	28.05	268	3.11
3.1.6.4 40% of power obtained in 3.1.6.1 with governor control set to 90% of rated engine speed							
43.5	1981	974	2096	13.99	16.80	322	2.59
3.1.6.5 60% of power obtained in 3.1.6.1 with governor control set to 60% of rated engine speed							
65.5	1320	649	1148	15.86	19.04	242	3.44
3.1.6.6 40% of power obtained in 3.1.6.1 with governor control set to 60% of rated engine speed							
43.5	1324	651	1130	10.80	12.97	248	3.35

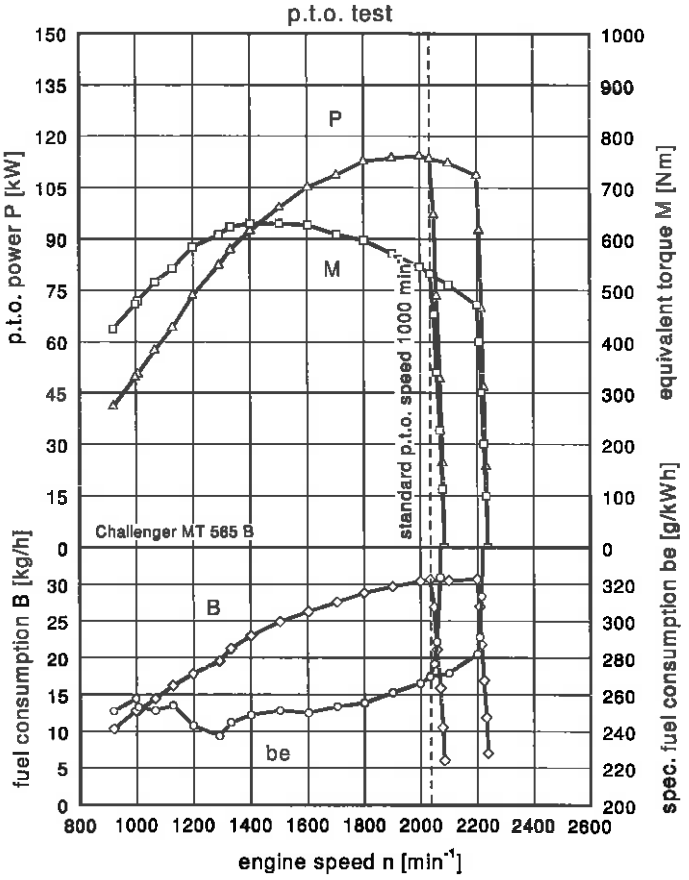
No load maximum engine speed:	2238	min^{-1}
Equivalent flywheel torque at rated engine speed:	472	Nm
Equivalent flywheel torque at 2-hour test:	546	Nm
at engine speed:	1999	min^{-1}
Maximum equivalent flywheel torque:	630	Nm
at engine speed:	1401	min^{-1}

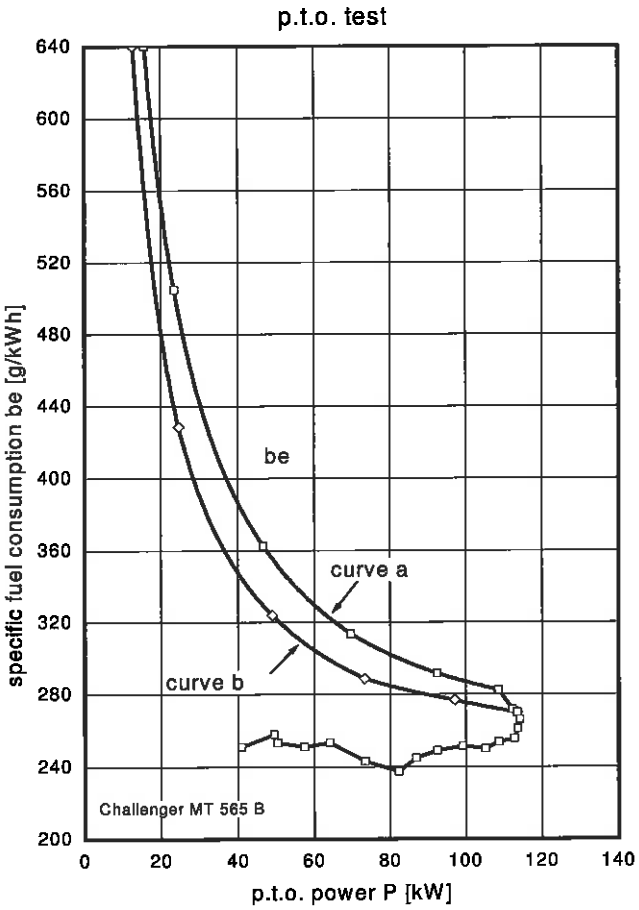
Mean atmospheric conditions

temperature:	19	°C
pressure:	99.2	kPa
relative humidity:	55	%

Maximum temperatures

coolant:	87	°C
oil:	119	°C
fuel:	49	°C
air intake:	17	°C


p.t.o. test
p.t.o. power P [kW]
equivalent torque M [Nm]
fuel consumption B [kg/h]
spec. fuel consumption be [g/kWh]
engine speed n [min-1]
standard p.t.o. speed 1000 min-1
Challenger MT 565 B
P
M
B
be
150
135
120
105
90
75
60
45
30
15
0
1000
900
800
700
600
500
400
300
200
100
0
320
300
280
260
240
220
200
30
25
20
15
10
5
0
800 1000 1200 1400 1600 1800 2000 2200 2400 2600


p.t.o. test
specific fuel consumption be [g/kWh]
640
600
560
520
480
440
400
360
320
280
240
200
be
curve a
curve b
Challenger MT 565 B
0
20
40
60
80
100
120
140
p.t.o. power P [kW]

3.2 HYDRAULIC POWER AND LIFTING FORCE

- Date of tests: 2nd June 2005

3.2.1 Hydraulic power test

3.2.1.1 Hydraulic fluid data

- Hydraulic fluid type: STOU
- Viscosity index (ISO 3448+Corr 1:1993): SAE 10W/40
- Viscosity at 65°C: 34 cst

3.2.1.2 Compulsory Reporting (Test Results):

	Pressure	Reservoir oil Temperature °C (65°C traget)		Engine speed	Flow rate	Power
		Min.	Max.			
	MPa	°C	°C	min^{-1}	l/min	kW
Rated Engine Speed *(Manufacturers Specification)*	-	-	-	2200	-	-
3.2.1.2.1 Maximum (sustained) pressure with relief valve open as measured at the coupler Pump stalled: No	19.8	65	65	2333	-	-
3.2.1.2.2 Flow rate corresponding to a hydraulic pressure equivalent to 90% of the actual relief valve pressure setting and corresponding hydraulic power	17.8	65		2315 [1)] 2306 [2)]	79.0 [1)] 110.7 [2)]	23.4 [1)] 32.8 [2)]
3.2.1.2.3 Maximum available flow and maximum power from one coupler pair	5.0 17.0	65 65		2333 2311	101.7 98.4	- 27.9
3.2.1.2.4 Maximum available flow and maximum power from coupler pairs operating simultaneously (flow through two or more coupler pairs if required)	3.2 18.0	65 65		2332 2306	122.0 109.7	- 32.9

- Tapping point used for test: At rear of tractor,

[1)] 1 double acting control valve
[2)] 2 double acting control valves parallel connection

3.2.2 Power lift test at rear power lift – Category 3

- Linkage settings for test - see on page 14

	At the hitch points	On the frame
Height of lower hitch points above ground in down position	230 mm	
Vertical movement without lifting forces	840 mm	1010 mm
with lifting forces	810 mm	979 mm
Max. corrected force exerted through full range	57.15 kN	49.95 kN
Corresponding pressure	17.8 MPa	
Moment about rear axle	67.15 kNm	91.55 kNm
Max. tilt angle of mast from vertical	-	11°

Lifting heights relative to horizontal lower links												
mm	-500	-435	-400	-300	-200	-100	0	+100	+200	+300	+375	+480
Lifting forces at hitch points, corrected to 17.8 MPa												
kN		57.15	58.50	61.90	65.70	69.10	73.60	77.40	81.00	82.35	80.10	
Lifting forces at standard frame, corrected to 17.8 MPa												
kN	49.95	51.30	52.20	54.00	56.25	58.05	59.85	61.65	63.00	62.55	61.20	56.25

3.3 DRAWBAR POWER TEST (unballasted tractor)

Date of tests: 9th and 11th May 2005
Type of track: Concrete

	Height of drawbar above ground	Tyre inflation pressure Front	Rear
Unballasted	540 mm	80 kPa	80 kPa

Gear number and range	Power	Drawbar pull	Speed	Engine speed	Slip of wheels	Fan speed	Specific fuel consumption	Specific energy	Temperature Fuel	Coolant	Engine oil	Atmospheric conditions Tempe-rature	Relative humidity	Pressure
	kW	kN	km/h	min^{-1}	%	min^{-1}	g/kWh	kWh/dm^3	°C	°C	°C	°C	%	kPa

3.3.1 MAXIMUM POWER IN TESTED GEARS (unballasted tractor)

I	73.6	64.34	4.12	2208	15.0	2163	376	2.21	42	79	113	14	39	100.4
I	84.8	66.00	4.63	2153	15.0	1803	360	2.31	41	78	113	11	49	100.4
I	88.3	64.47	4.93	2001	12.2	2142	339	2.46	41	80	115	13	45	100.4
I	90.6	55.39	5.89	1998	7.6	2122	330	2.52	41	80	114	14	41	100.4
I	93.5	50.56	6.66	1999	6.2	2117	320	2.60	41	80	112	10	58	99.4
I	93.3	42.32	7.94	2000	4.9	2185	321	2.60	41	82	115	13	48	99.4
I	92.9	35.75	9.36	2000	4.0	2169	323	2.58	42	81	114	14	44	99.4
I	92.2	31.68	10.47	2002	3.4	2201	325	2.56	43	82	116	15	42	99.3
I	90.9	27.46	11.91	2000	2.9	2199	330	2.53	44	82	115	14	44	99.3
I	89.5	23.17	13.91	2001	2.1	2080	335	2.49	40	83	116	11	50	100.4
I	88.1	19.78	16.03	2003	2.1	2068	341	2.44	39	82	116	11	50	100.4

Challenger MT 565 B **DLG-Test No. 2005-062**

Gear number and range	Power	Drawbar pull	Speed	Engine speed	Slip of wheels	Fan speed	Specific fuel consumption	Specific energy	Temperature			Atmospheric conditions		
									Fuel	Coolant	Engine oil	Tempe-rature	Relative humidity	Pressure
	kW	kN	km/h	min^{-1}	%	min^{-1}	g/kWh	kWh/dm^3	°C	°C	°C	°C	%	kPa
II	89.0	37.97	8.43	2001	4.9	2153	337	2.47	42	84	117	11	60	99.3
II	89.6	35.78	9.02	2001	4.5	2173	334	2.49	42	83	116	10	62	99.3
II	91.4	31.20	10.54	2001	4.0	2166	328	2.54	42	83	117	10	62	99.3
II	91.6	28.53	11.56	2000	3.7	2120	327	2.54	42	83	116	10	63	99.3
II	91.6	25.06	13.16	2002	3.1	2079	327	2.54	42	82	117	9	64	99.4
II	94.3	23.83	14.24	2004	3.0	2112	318	2.62	42	82	114	10	60	99.4
II	93.4	20.40	16.47	1999	3.0	2101	321	2.59	41	80	112	11	57	99.3

Challenger MT 565B

DLG-Test No. 2005-062

Gear number and range	Power	Drawbar pull	Speed	Engine speed	Slip of wheels	Fan speed	Specific fuel consumption	Specific energy	Temperature			Atmospheric conditions		
									Fuel	Coolant	Engine oil	Temperature	Relative humidity	Pressure
	kW	kN	km/h	min^{-1}	%	min^{-1}	g/kWh	kWh/dm^3	°C	°C	°C	°C	%	kPa
	FUEL CONSUMPTION													
3.3.2.1	In selected gear, at maximum power at rated speed													
II	80.4	17.28	16.75	2204	1.8	2178	366	2.27	40	84	116	13	43	100.4
3.3.2.1.1	75 % of pull at maximum power at rated speed													
II	59.8	12.67	16.99	2213	1.2	2195	401	2.07	41	83	116	12	48	100.4
3.3.2.1.2	50 % of pull at maximum power at rated speed													
II	39.7	8.32	17.19	2221	0.5	2162	496	1.68	40	80	113	12	46	100.4
3.3.2.1.3	Next higher gear at reduced engine speed; same pull and travelling speed as in 3.3.2.1.1													
II	61.0	12.89	17.03	1999	1.2	2074	360	2.31	41	78	111	13	44	100.4
3.3.2.1.4	Next higher gear at reduced engine speed; same pull and travelling speed as in 3.3.2.1.2													
II	40.8	8.50	17.28	2008	0.6	1579	415	2.01	40	79	109	13	43	100.4
3.3.2.2	In selected gear nearest to 7.50 km/h at rated speed													
I	89.8	41.71	7.75	2201	4.9	2206	340	2.45	42	81	116	14	40	100.4
3.3.2.2.1	75 % of pull at maximum power at rated speed													
I	68.6	31.07	7.95	2212	3.4	2222	357	2.33	43	82	117	14	40	100.4
3.3.2.2.2	50 % of pull at maximum power at rated speed													
I	46.4	20.65	8.08	2222	2.2	2207	414	2.01	42	80	115	14	41	100.4
3.3.2.2.3	Next higher gear at reduced engine speed; same pull and travelling speed as in 3.3.2.2.1													
I	69.1	31.14	7.99	1967	3.4	2089	324	2.57	43	78	113	15	37	100.4
3.3.2.2.4	Next higher gear at reduced engine speed; same pull and travelling speed as in 3.3.2.2.2													
I	46.6	20.62	8.13	1968	2.4	1440	349	2.39	43	77	111	14	43	100.4

4 ADDITIONAL TESTS under the responsibility of the DLG Testing Station

Not covered by the approval.

4.1 DRAWBAR POWER TEST (tractor with dual wheels)

4.1.1 Tractor mass

dual wheels (2 front wheels, 4 rear wheels); additional ballast

	Without driver kg	With driver kg
Front	3645	3670
Rear	5190	5240
Total	8835	8910

4.1.2 Tyres and track width specification

Dual wheels (2 front wheels, 4 rear wheels)

	Front	Rear
Tyres:	Michelin Agribib	
- Dimensions	380/85 R 30	480/80 R42
- Load index speed index	**135 A8**	**151 A8**
- Type	radial	radial
- Maximum load (tyre manufacturer's)	21.80 kN*)	34.50 kN*)
- Maximum load (tractor manufacturer's)	21.00 kN	18.25 kN
at travelling speed	40 km/h	40 km/h
at tyre inflation pressure	160 kPa	160 kPa
dynamic radius index	695 mm	920 mm
Chosen track width:	1640 mm	2740 mm

*) With other tyres higher load capacity possible

4.1.3 Test Results Drawbar Power Test with dual wheels

Date of tests: 31th May and 1st June 2005
Type of track: Concrete

	Height of drawbar above ground	Tyre inflation pressure Front	Rear
Unballasted	540 mm	110 kPa	60 kPa

Gear number and range	Power	Drawbar pull	Speed	Engine speed	Slip of Wheels	Fan speed	Specific Fuel consumption	Specific energy	Temperature Fuel	Coolant	Engine Oil	Atmospheric conditions Tempe-rature	Relative humidity	Pressure
	kW	kN	km/h	min^{-1}	%	min^{-1}	g/kWh	kWh/dm³	°C	°C	°C	°C	%	kPa

4.1.3.1 MAXIMUM POWER IN TESTED GEARS

I	76.8	85.25	3.24	2199	15.3	2338	396	2.10	48	81	117	22	39	100.5
I	82.3	86.52	3.43	2074	15.0	1820	368	2.26	47	79	115	20	42	100.5
I	88.2	77.51	4.10	2002	9.7	2146	340	2.45	47	80	116	23	38	100.5
I	90.2	69.58	4.66	2000	7.3	2202	332	2.51	47	81	116	21	43	100.5
I	91.2	62.30	5.27	2000	6.3	2193	328	2.54	47	82	118	19	45	100.5
I	92.7	54.57	6.12	1999	5.0	2147	322	2.58	46	83	117	20	43	100.5
I	92.7	48.91	6.83	2001	4.4	2129	323	2.58	44	76	111	22	33	100.6
I	89.9	39.84	8.13	2000	3.6	2234	333	2.50	45	80	110	22	32	100.6
I	89.9	34.14	9.48	2000	3.2	2179	334	2.49	47	80	114	21	33	100.6
I	89.9	30.17	10.73	2001	2.7	2163	333	2.50	40	81	114	20	53	100.6
I	89.0	26.26	12.20	2001	2.4	2097	336	2.48	39	80	114	15	57	100.6
I	87.5	22.95	13.73	2004	2.1	2170	342	2.43	40	80	115	14	59	100.6
I	85.7	19.36	15.93	2005	1.8	2127	350	2.38	41	80	115	14	60	100.6

Gear Number and range	Power	Drawbar Pull	Speed	Engine Speed	Slip of Wheels	Fan speed	Specific Fuel consumption	Specific energy	Temperature			Atmospheric conditions		
									Fuel	Coolant	Engine Oil	Tempe-rature	Relative humidity	Pressure
	kW	kN	km/h	min^{-1}	%	min^{-1}	g/kWh	kWh/dm³	°C	°C	°C	°C	%	kPa

4.1.3.1 MAXIMUM POWER IN TESTED GEARS (continued)

II	87.6	42.70	7.38	2001	7.5	2167	343	2.43	43	78	112	19	38	100.7
II	89.3	37.30	8.62	2001	6.5	2181	335	2.49	43	81	116	19	39	100.7
II	90.6	33.91	9.61	2001	5.6	2160	330	2.52	41	82	115	18	43	100.7
II	89.8	30.69	10.53	2001	2.6	2201	333	2.50	42	82	114	20	37	100.7
II	89.8	26.86	12.03	2003	2.4	2177	334	2.49	43	80	113	20	36	100.7
II	89.8	24.01	13.46	2002	2.1	2138	334	2.50	44	79	114	19	38	100.6
II	89.2	21.96	14.62	2001	1.8	2139	336	2.48	44	79	113	20	35	100.6
II	87.9	19.00	16.66	2004	1.5	2195	341	2.44	44	80	114	21	35	100.6

Challenger MT 565B **DLG-Test No. 2005-062**

Gear number and range	Power	Drawbar pull	Speed	Engine Speed	Slip of Wheels	Fan speed	Specific fuel consumption	Specific energy	Temperature			Atmospheric conditions		
									Fuel	Coolant	Engine oil	Tempe-rature	Relative humidity	Pressure
	kW	kN	km/h	min^{-1}	%	min^{-1}	g/kWh	kWh/dm^3	°C	°C	°C	°C	%	kPa
	FUEL CONSUMPTION													
4.1.3.2	In selected gear, at maximum power at rated speed													
I	87.7	46.93	6.72	2198	4.7	2340	349	2.38	48	80	117	21	38	100.4
4.1.3.2.1	75 % of pull at maximum power at rated speed													
I	66.8	35.00	6.87	2212	3.3	2333	363	2.29	46	78	110	21	41	100.4
4.1.3.2.2	50 % of pull at maximum power at rated speed													
I	45.0	23.17	7.00	2221	2.2	2300	422	1.97	47	78	111	19	44	100.4
4.1.3.2.3	Next higher gear at reduced engine speed; same pull and travelling speed as in 4.1.3.2.1													
I	66.1	35.03	6.79	1935	3.2	2049	327	2.55	48	78	112	20	41	100.4
4.1.3.2.4	Next higher gear at reduced engine speed; same pull and travelling speed as in 4.1.3.2.2													
I	44.9	23.29	6.95	1947	2.5	2029	365	2.28	47	77	111	22	37	100.4
4.1.3.3	In selected gear nearest to 7.50 km/h at rated speed													
I	87.3	40.54	7.75	2199	4.0	2349	351	2.37	48	80	115	23	32	100.4
4.1.3.3.1	75 % of pull at maximum power at rated speed													
I	66.5	30.25	7.92	2213	2.9	2372	369	2.25	49	82	117	23	32	100.4
4.1.3.3.2	50 % of pull at maximum power at rated speed													
I	44.8	20.04	8.05	2221	1.9	2330	429	1.94	48	78	113	23	31	100.4
4.1.3.3.3	Next higher gear at reduced engine speed; same pull and travelling speed as in 4.1.3.3.1													
I	65.9	30.20	7.86	1938	2.9	2110	330	2.53	48	78	112	20	38	100.4
4.1.3.3.4	Next higher gear at reduced engine speed; same pull and travelling speed as in 4.1.3.3.2													
I	44.5	19.99	8.02	1947	1.7	2046	370	2.25	46	77	110	20	38	100.4

4.2 Additional power lift test at rear power lift with different linkage adjustments to obtain maximum lifting force:

- Linkage settings for test - see on page 14

	At the hitch points	On the frame
Height of lower hitch points above ground in down position	425 mm	
Vertical movement without lifting forces	735 mm	815 mm
with lifting forces	710 mm	785 mm
Max. corrected force exerted through full range	69.30 kN	65.70 kN
Corresponding pressure	17.8 MPa	
Moment about rear axle	81.45 kNm	118.90 kNm
Max. tilt angle of mast from vertical	-	7°

Lifting heights relative to horizontal lower links												
mm	-255	-240	-200	-100	0	+100	+200	+300	+400	+470	+500	+530
Lifting forces at hitch points, corrected to 17.8 MPa												
kN		69.30	70.20	73.80	77.85	82.80	87.30	91.35	92.70	90.00		
Lifting forces at standard frame, corrected to 17.8 MPa												
kN	65.70		66.60	67.95	70.65	72.45	75.15	76.05	76.50		72.45	70.65

5	**REPAIRS**	**None**
6	**REMARKS**	The electronic engine control device of the MT 555 B model was replaced by the MT 565 B module and all relevant measurements were repeated. All other specifications of the models MT 555 B and MT 565 B are identical.

Head of Vehicle Technology

Dipl.-Ing. (FH) Ottmar Degrell

Test carried out by

Dipl.-Ing. (FH) Thomas Feuerstein

Date: 10th April 2006



Challenger MT 565 B **DLG-Test No. 2005-062**



Deutsche Landwirtschafts-Gesellschaft e.V.
Testzentrum Technik und Betriebsmittel
Max-Eyth-Weg 1, D-64823 Groß-Umstadt
Telefon: 0 60 78 / 96 35 0 Fax: 0 60 78 / 96 35 90
E-mail: Tech@DLG.org, Internet: www.DLG.org/landtechnik