Report on test in accordance with O.E.C.D. STANDARD CODE

O.E.C.D. No. 640



Agricultural Tractor Deutz DX 140-S

Manufacturer
Klöckner-Humboldt-Deutz AG, D-5000 Köln 80

Deutsche Landwirtschafts-Gesellschaft e.V.
Zimmerweg 16 · D-6000 Frankfurt a. M. 1
Telefon: (0611) 72 07 11 · Telex: 04 131 85 dlg-d

This bulletin is based on engineering tests in accordance with the O.E.C.D. STANDARD CODE for the Official Testing of Agricultural Tractor Performance. It does not contain an evaluation of the tractor performance on practical work.

Performance of tests: August 1978 till April 1979

DLG-Testing-Station for Agricultural Machinery, Max-Eyth-Weg 1,
D-6114 Groß Umstadt

This report has been approved by the O.E.C.D. Coordinating Centre (C.N.E.E.M.A., France) as being in accordance with the O.E.C.D. STANDARD CODE.

Date of Approval: 3rd September, 1979 O.E.C.D. No. 640

In this report all performance characteristics are given corresponding to the International System of Units.

The reference to the former used Technical System of Units is given by the following relations:

Forces	1 daN = 10 N	= 1,02 kp	or 1 kp	= 0,981 daN
Powers	1 kW	= 1.36 PS	or 1 PS	= 0,736 kW
Pressures	1 bar	= 1,02 kp/cm^2	or 1 kp/cm^2	= 0,981 bar
	1000	mbar = 750,1 mm Hg		

All rights including the right of translation, reprint and photomechanical copying — also of excerpts — reserved by the DLG.

Printed in the Federal Republic of Germany

September 1979; DLG-No. 127

TABLE OF CONTENTS

	Page
Specification of tractor	4 to 15
Fuel and lubricants used in tests	15
COMPULSORY TESTS	
(1) Main power take-off performance	16 to 19
(2) Drawbar performance on a concrete track	20 and 21
(3) Turning space and turning circle	22
(4) Location of centre of gravity	22
(5) Braking performance	23
(6) Ambient noise, emitted by the tractor	24
(7) Noise at the driver's ear level	24
(8) Power lift and hydraulic pump performance	25 to 28
OPTIONAL TESTS	
(9) Engine performance	29 to 32

PRÜFUNGS-ABTEILUNG
DEUTZ DX 140-S

Test No. 78-31

Tractor manufacturer:	KLÖCKNER-HUMBOLDT-DEUTZ AG D-5000 Köln-80
Submitted for test by:	Manufacturer
Selected by:	Manufacturer with agreement by DLG
Place of running-in:	Köln-Deutz and Groß-Umstadt
Duration of running-in:	Engine and tractor appr. 100 hours

SPECIFICATION OF TRACTOR

Tractor

Make:	KLÖCKNER-HUMBOLDT-DEUTZ AG
Model:	DX 140-N
Type:	Wheel tractor, unit construction, rear wheel driven
Serial No:	76220010

Engine

Make:	KLÖCKNER-HUMBOLDT-DEUTZ AG
Model:	BF6L 913
Type:	4-stroke DIESEL engine, direct injection, air cooled, turbo supercharged
Serial No:	60 11 423
Cylinders:	6, in line, bore 102 mm, stroke 125 mm, displacement 6128 cm^3, compression ratio 15,5:1 replaceable ribbed cylinder liners
Valves:	Overhead
Fuel system:	BOSCH fuel feed pump FB/KS 22 AD 23/2; BOSCH in line injection pump: PES 6 A 85 D 410 RS 2537; manufacturer's production setting 67 mm^3/stroke at rated engine speed; injection timing 32° before TDC; BOSCH multihole injectors DLLA 149 S 490; injection pressure 175 bar; BOSCH two stage filter 213 3556 with replaceable cartridges; capacity of fuel tank 155 l, additional tank with 50 l capacity optional

PRÜFUNGS-ABTEILUNG
DEUTZ DX 140-S Test No. 78-31

Governor:	BOSCH centrifugal variable speed governor: EP/RSV 325-1150 A8B 2020 D; governed range of engine speed: 700 to 2320 rev/min; rated engine speed 2200 rev/min
Charger:	Exhaust driven supercharger; KÜHNLE, KOPP UND KAUSCH; 3 LEP 229 A/13.2; supercharge pressure 440 mbar $\pm$ 10%; without supercharger air intercooler
Air cleaner:	Own make; DEUTZ SICCOPUR dry paper element filter with precleaner with replaceable cartridge and electrically operating maintenance tele-indicator
Exhaust silencer:	LANGE KH 5 single chamber absorption type silencer; 120 x 230 mm oval, 1090 mm long; on the left hand side of bonnet; mouth showing upward; mouth 2850 mm above ground
Lubrication system:	Forced feed from gear pump; strainer in sump; MANN oil filter in full flow, with replaceable cartridge and by-pass valve; cartridge change at all oil changes; oil capacity 16 l; recommended oil and change interval MIL-L-2104 C 200 hours recommended oil viscosities: below -5°C SAE 10W from -10°C to +10°C SAE 20W/20 from +5°C to +30°C SAE 30 above +25°C SAE 40 or SAE 20W/40 multigrade oil above -10°C oil cooler on the right hand side of engine

PRÜFUNGS-ABTEILUNG
DEUTZ DX 140-S

Test No. 78-31.

Cooling system:	Air cooling with axial blower V-belt driven
Starting system:	Electrical BOSCH screw push starter motor ID 12V 3 kW; BOSCH flame plug in air intake pipe: B 12V H 7632
Electrical equipment:	12 Volt, negative earth; BOSCH 3-phase alternator G 1 14V 65A; 1 battery 143 Ah at 20 hours rating lead acid type

Transmission

Clutch:	LAMELLEN-UND KUPPLUNGSBAU GMBH A 1 435 003 dry single disc type clutch for travel drive only, pedal operated; clutch disc diameter 350 mm
Gear box:	STEYR-DAIMLER-PUCH AG, Austria TW 1200-S; synchromesh speed change gear with 4 speeds; group gear with 3 forward groups (slow, fast and intermediate group) and 1 reverse group, slow and fast group collar shifted; intermediate and reverse group synchronized; optional: additional spur gear drive ahead of transmission either power shift reduction gear only or with creep speed gear; creep speed gear collar shifted; power shift reduction gear acts on all speeds except creep speeds; tractor tested is fitted with power shift reduction gear only; totally 24 forward speeds and 8 reverse speeds

PRÜFUNGS-ABTEILUNG

DEUTZ DX 140-S Test No. 78-31

Rear axle and final drive:	Bevel gear drive with crown wheel and pinion; bevel gear differential with lock; pedal operated, self disengaging; planetary final drives
Oil capacity:	All transmission units together 70 l
Specified oil:	Super-Tractor-Universal-Oil (STUO) with Lubrizol 3950 15W/30 or 20W/30
Oil changing interval:	1000 hours

Total ratios and speeds (Tyres 20,8 R 38)

Group	Gear	Total ratio engine : driving wheel	Nominal travelling speed *) at rated engine speed km/h	Nominal travelling speed *) at standard p.t.o. speed 1000 rev/min km/h
Power shift HI				
Slow group (L)	1	232,53	3,05	2,66
	2	165,60	4,28	3,73
	3	120,19	5,90	5,14
	4	86,29	8,22	7,16
Inter group (Z)	1	139,70	5,08	4,42
	2	99,49	7,13	6,21
	3	72,21	9,82	8,56
	4	51,84	13,68	11,92
Fast group (S)	1	63,99	11,08	9,65
	2	45,57	15,56	13,56
	3	33,08	21,44	18,68
	4	23,75	29,86	26,02
Reverse group (R)	1	134,52	5,27	4,59
	2	95,80	7,40	6,45
	3	69,53	10,20	8,88
	4	49,92	14,20	12,38

*) calculated with INDEX RADIUS 855 mm as per WdK 154

PRÜFUNGS-ABTEILUNG
DEUTZ DX 140-S

Test No. 78-31

Total ratios and speeds

Group	Gear	Total ratio engine : driving wheel	Nominal travelling speed at rated engine speed km/h	Nominal travelling speed at standard p.t.o. speed 1000 rev/min km/h
Power shift LO				
Slow group (L)	1	291,76	2,43	2,12
	2	207,78	3,41	2,97
	3	150,81	4,70	4,10
	4	108,27	6,55	5,71
Inter group (Z)	1	175,29	4,05	3,52
	2	124,83	5,68	4,95
	3	90,60	7,83	6,82
	4	65,05	10,90	9,50
Fast group (S)	1	80,29	8,83	7,69
	2	57,18	12,40	10,80
	3	41,50	17,09	14,89
	4	29,79	23,80	20,74
Reverse group (R)	1	168,79	4,20	3,66
	2	120,20	5,90	5,14
	3	87,24	8,13	7,08
	4	62,64	11,32	9,86
Creep group (not fitted in tractor tested)				
Slow group (L)	1	1963,58	0,36	0,31
	2	1398,38	0,51	0,44
	3	1014,96	0,70	0,61
	4	728,69	0,97	0,85
Inter group (Z)	1	1179,70	0,60	0,52
	2	840,14	0,84	0,74
	3	609,78	1,16	1,01
	4	437,79	1,62	1,41
Fast group (S)	1	540,35	1,31	1,14
	2	384,81	1,84	1,61
	3	279,30	2,54	2,21
	4	200,52	3,54	3,08
Reverse group (R)	1	1135,95	0,62	0,54
	2	808,98	0,88	0,76
	3	587,16	1,21	1,05
	4	421,55	1,68	1,47

Power take-off	Independent p.t.o.; engaged and disengaged through hydraulically operated wet multidisc clutch; at rear of tractor, in tractor's median plane; 713 mm above ground; involute profile with 21 spleens, 35 mm dia DIN 9611 or ISO 500 type 2 1148 rev/min at rated engine speed; standard p.t.o. speed 1000 rev/min at 1917 rev/min engine speed; p.t.o. speeds may be set by aid of tractormeter; direction of rotation clockwise viewed from tractor rear
Power lift	Own make; K 55.2 DEUTZ-TRANSFERMATIK-system; hydraulic power lift unit construction; lower link control; BOSCH gear pump HY/ZFS 11/22,5 L; delivery 22,5 cm^3/rev or 58,4 l/min at rated engine speed, independent of clutch; directly driven by gearbox; DEUTZ control valve for lifting, lowering, draft control, position control and floating position; maximum working pressure 175 bar; main cylinder in power lift unit with 90 mm bore, 146 mm stroke; 2 external additional lift assist rams with 65 mm bore, 185 mm stroke; optional: up to 3 single or double acting additional control valves with 1 or 2 oil tappings each in every combination available

oil tank in power lift unit with
18,5 l capacity;
optional: additional oil tank with
20 l capacity;
7,5 l (27,5 l with additional oil tank),
may be taken off through oil tappings when
tractor is working stationary or driving;
recommended oil:
engine oil SAE 10W MIL-L-2104 B;
oil changing interval once a year

Implement linkage

Three point linkage category II DIN 9674;
category III optionally;
WALTERSCHEID quick coupler optionally
available;
2 holes in the lower links for fitting
the lift rods:
hole 1 in 563 mm
hole 2 in 620 mm distance of pivot point
of lower links;
lift rods adjustable from 855 to 995 mm;
lifting range above ground when using
hole no. 1:
with short lift rods from 367 to 1032 mm
with long lift rods from 90 to 801 mm
hole no 2:
with short lift rods from 417 to 1027 mm
with long lift rods from 157 to 817 mm

Holed bar

Short bar;
fitted on clevis of lower links;
length between the joint balls 825 mm;
width 80 mm, thickness 30 mm;
centre hole and 4 holes in 80 mm distance
each on either side;
all holes 33 mm diameter;
height above ground adjustable by power lift
in the range from 105 mm to 1047 mm,
depending on lift rods length and fixing
hole on the lower links, measured at the
surface of the bar;

in the range from 485 to 705 mm mechanically-hydraulically fixable, depending on lift rods length;
distance of centre hole with lower links in horizontal position:
from rear axle centre 1166 mm
from p.t.o. shaft end 573 mm

Trailer hitch

CRAMER, automatical;
KU 758;
hitch hole diameter 33 mm;
height above ground 892, 908, 942 or 958 mm;
adjustable by shifting and turning hitch;
distance of hitch hole centre to rear axle centre 636 mm;
permissible vertical load 2000 kg

Swinging drawbar

Optional;
height above ground adjustable by turning drawbar to 366 or 471 mm;
hitch hole 33 mm diameter;
distance of hitch hole centre:
from p.t.o. shaft end 355, 400 or 500 mm
from rear axle centre 940, 985 or 1085 mm;
lateral swingable about 505, 525 or 565 mm to either side;
pivot point 275 mm before rear axle centre

Towing hitch

897 mm above ground

Steering

ZAHNRADFABRIK FRIEDRICHSHAFEN AG
hydrostatic steering, model 8452;
own oil circuit;
BOSCH hydraulic gear pump HY/ZFS 11/19L;
delivery 19 cm^3/rev or 45 l/min at rated engine speed;
directly driven by engine;
1 ram acting directly on front axle,
bore 50 mm, stroke 250 mm

Brakes

Parking brake:	Mechanically acting on separate discs, 2 coated discs per brake on either side of differential half shafts; disc diameter 222 mm; operated by hand lever with ratchet
Service brake:	Mechanically-hydraulically acting wet GIRLING multi-disc-type brake with 6 coated discs per brake on either side of differential half shafts; disc diameter 222 mm; pedal operated
Steering brake:	Divided pedal of service brake, for normal use locked together

Wheels

Steered wheels:	2 pneumatics in front 11,00-16 AS Front 8 ply; maximum permissible load per tyre 1320 kg at 2,5 bar inflation pressure and 30 km/h; track width adjustable from 1596 to 2196 mm in 6 steps of 100 mm each by extending telescopic half axles; rims W 8 L x 16
Driving wheels:	2 pneumatics at rear 20,8 R 38 AS 8 ply; radial type tyre casing; maximum permissible load per tyre 3090 kg at 1,3 bar inflation pressure and 30 km/h; track width adjustable from 1800 to 2200 mm in 4 steps of 100 mm each by turning wheels and offset lug type rims; rims W 18 L x 38
Wheel base:	2831 mm

PRÜFUNGS-ABTEILUNG
DEUTZ DX 140-S

Test No. 78-31

Cab

Own make;
safety cab:
model SK 1905-37 LUXUS (MASTER CAB)
O.E.C.D.-tested, approval no. CSD 0021/8-a(C);
platform with rubber vibration dampers fixed on rear axle casing and clutch casing;
4-post protection frame of square steel tubes with steel roof built up upon platform;
protection frame completed by front frame of square steel tubes too;
round about glassed with safety glass;
windscreen and upper part of back window may be opened upwards and fixed;
inside covered with noise damping paddings of flame resistant plastics;
door on the left hand side, optionally on the left and right hand side, manufactured of glass fiber reinforced synthetics;
entry with 2 steps, lower step 620, upper step 910 mm above ground;
oilcooler-heat-exchanger heating;
optionally additional heating and/or air conditioning system available

Seat

GRAMMER
DS 85 H/90 AR
upholstered seat with back and arm rests;
adjustable spring with shock absorber, back rest infinitely variable,
side inclination and arm rests adjustable;
height of driver's platform 1210 mm above ground;
height of unloaded seat above platform adjustable in 3 steps from 420 to 480 mm;
for and aft adjustable about 155 mm

Dimensions

Total length:	4714 mm	with 3-point linkage without ballast
	5034 mm	with 3-point linkage with ballast
Total width:	2372 mm	at smallest track width
	2770 mm	at largest track width
Total height:	2850 mm	to mouth of exhaust pipe
Ground clearance:	500 mm	below engine casing

PRÜFUNGS-ABTEILUNG
DEUTZ DX 140-S

Test No. 78-31

Weights — Ready for use as tested, with cab

		without driver	with driver
Without ballast:	front	1855 kg	1865 kg
	rear	3410 kg	3480 kg
	total	5265 kg	5345 kg
Front ballast:	5 front weights	40 kg each	200 kg
Rear ballast:	1 intermediate ring per wheel	45 kg each	90 kg
	10 weights per wheel	50 kg each	1000 kg
	water in the tyres		1060 kg
With ballast:	front	2090 kg	2095 kg
	rear	5525 kg	5600 kg
	total	7615 kg	7695 kg

Lighting equipment — Electrical 12 Volt
as per German legislation

	Dimensions mm	Height above ground to centre mm	Distance from outside edge of tractor to centre mm *)
Head lights with parking lights	130 mm	1118	978
Side lights	50 x 50	1715	388
Rear lights	45 x 65	1740	356
Reflectors			
1st pair	103 x 58	1454	177
2nd pair	103 x 58	617	697

*) at smallest track width

PRÜFUNGS-ABTEILUNG
DEUTZ DX 140-S

Test No. 78-31

Permissible total weights and axle loads

for all available wheel equipment

Wheel equipment front	Wheel equipment rear	Permissible total weights kg	Permissible axle load front kg	Permissible axle load rear kg
11,00- 16 8 ply	9,5-48 8 ply	6730	2640	4090
	16,9-42 8 ply	7700		5340
	18,4-38 8 ply	7700		5430
	20,8-38 8 ply	7700		6180

All driving wheel tyres are permissible as diagonal type tyre casings as well as radial type tyre casings

FUELS AND LUBRICANTS USED IN TESTS

Fuel:	ARAL DIESEL-fuel DIN 51601
	specific gravity at 15°C
	at engine tests 0,833 kg/l
	at p.t.o. tests 0,829 kg/l
	at drawbar tests 0,826 kg/l
Engine oil:	ESSOLUBE XD3 SAE 20W/20 MIL-L-2104 C
Transmission oil:	SHELL AGROMA 20W/30
Hydraulic oil:	ESSOLUBE HDX SAE 10W MIL-L-2104 B

PRÜFUNGS-ABTEILUNG

DEUTZ DX 140-S

Test No. 78-31

COMPULSORY TESTS

(1) MAIN POWER TAKE-OFF PERFORMANCE (1000 rev/min)

Date of tests: 19th and 20th February 1979
Type of dynamometer: SCHENCK hydraulic dynamometer U1-40

Power kW	Speed engine rev/min	Speed p.t.o. rev/min	Fuel consumption total l/h	Fuel consumption total kg/h	Fuel consumption specific g/kWh	Specific energy kWh/l
Maximum power						
At 2-hour test						
86.9	2200	1148	27.00	22.37	257	3.22
At standard p.t.o. speed						
82.7	1917	1000	24.30	20.13	243	3.40
At the speed recommended for drawbar work						
86.9	2200	1148	27.00	22.37	257	3.22
Part loads, the governor hand lever in the position corresponding to the maximum power at full load						
(i) 85% of the torque at maximum power at 2-hour test						
75.8	2256	1177	24.50	20.30	268	3.09
(ii) unloaded						
-	2314	1208	8.23	6.82	-	-
(iii) 50% of the load defined in (i)						
38.4	2289	1194	15.74	13.04	339	2.44
(iv) maximum power						
86.9	2200	1148	27.00	22.37	257	3.22
(v) 25% of the load defined in (i)						
19.4	2306	1203	11.68	9.68	500	1.66
(vi) 75% of the load defined in (i)						
57.1	2270	1184	20.34	16.85	295	2.81

PRÜFUNGS-ABTEILUNG
DEUTZ DX 140-S


Test No. 78-31

Power kW	Speed engine rev/min	Speed p.t.o. rev/min	Fuel consumption total l/h	Fuel consumption total kg/h	Fuel consumption specific g/kWh	Specific energy kWh/l
Part loads, the governor hand lever in the position corresponding to the standard p.t.o. speed at full load						
(i) 85% of the torque at maximum power at 2-hour test						
71.2	1941	1013	21.21	17.58	247	3.36
(ii) unloaded						
-	2005	1046	5.73	4.75	-	-
(iii) 50% of the load defined in (i)						
36.1	1966	1026	13.20	10.94	303	2.73
(iv) maximum power						
82.7	1917	1000	24.30	20.13	243	3.40
(v) 25% of the load defined in (i)						
18.2	1979	1033	9.43	7.81	430	1.92
(vi) 75% of the load defined in (i)						
53.8	1955	1020	17.06	14.13	263	3.15

Standard specific fuel consumption (g/kWh): 268/339/247/303

No load maximum engine speed: 2314 rev/min
Equivalent crankshaft torque at maximum power (2 hours): 377 Nm
Maximum equivalent crankshaft torque: 456 Nm at 1525 rev/min of the engine

Mean atmospheric conditions:	temperature	26 °C
	pressure	1001 mbar
	relative humidity	37 %
Maximum temperatures:	coolant	-
	engine oil	108 °C
	fuel	35 °C
	engine air intake	28 °C

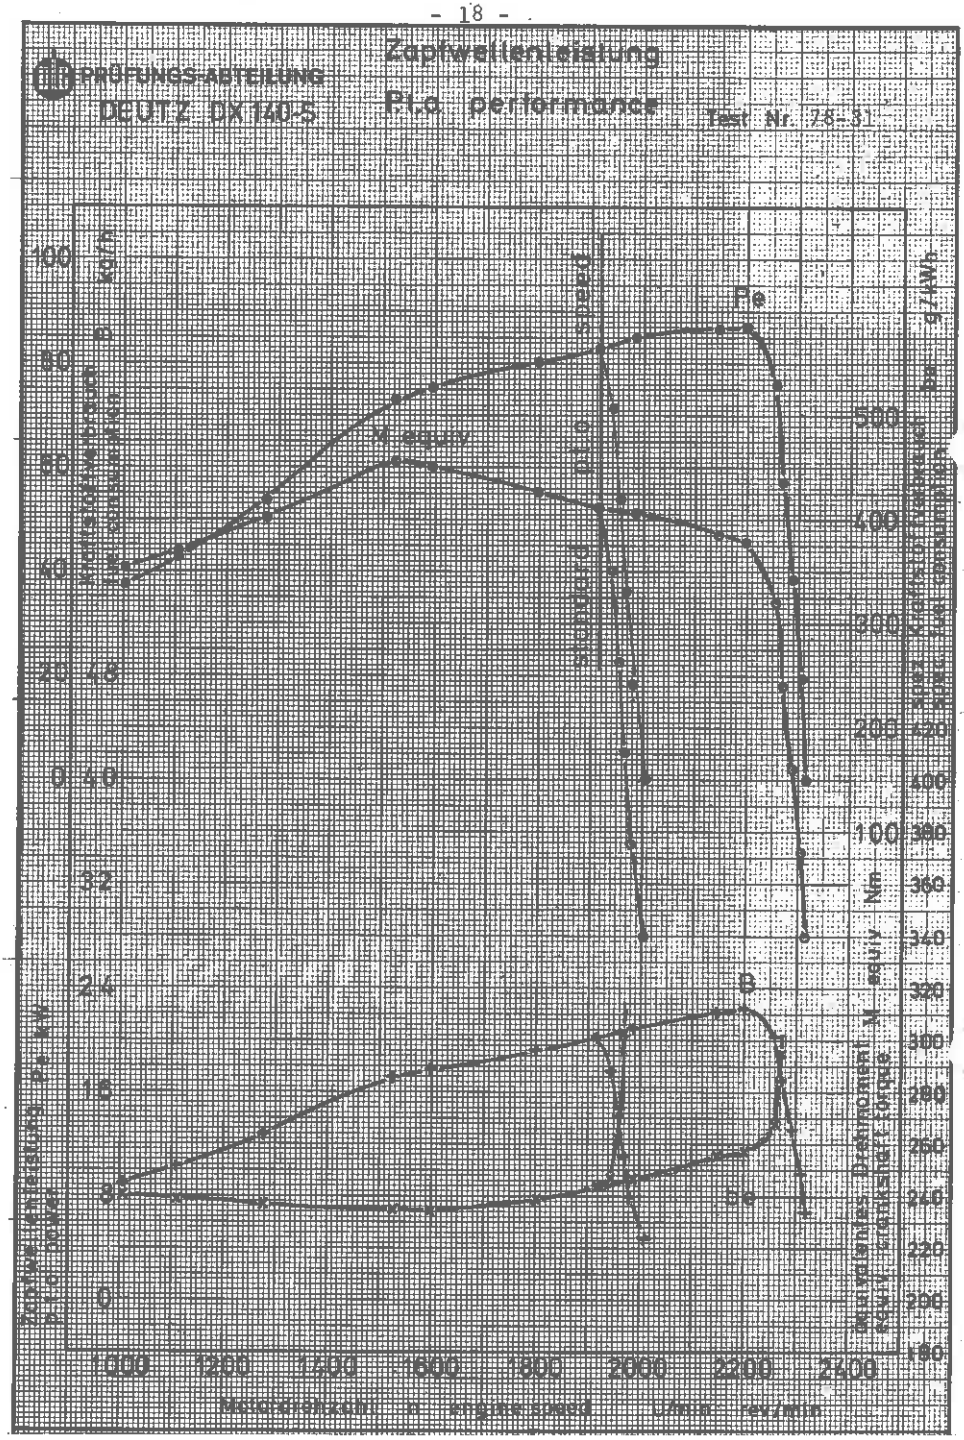
Zapfwellenleistung
PTO performance
PRÜFUNGS-ABTEILUNG
DEUTZ DX 140 S
Test Nr. 78-31
Pe
M equiv
Drehmoment
Leistung
Kraftstoffverbrauch
Nm
kW
g/kWh
l/h
1000
1200
1400
1600
1800
2000
2200
2400
Motordrehzahl n engine speed U/min rev/min


PRÜFUNGS-ABTEILUNG

DEUTZ DX 140-S

Zapfwellenleistung

P.t.o. performance

Test Nr. 78-31

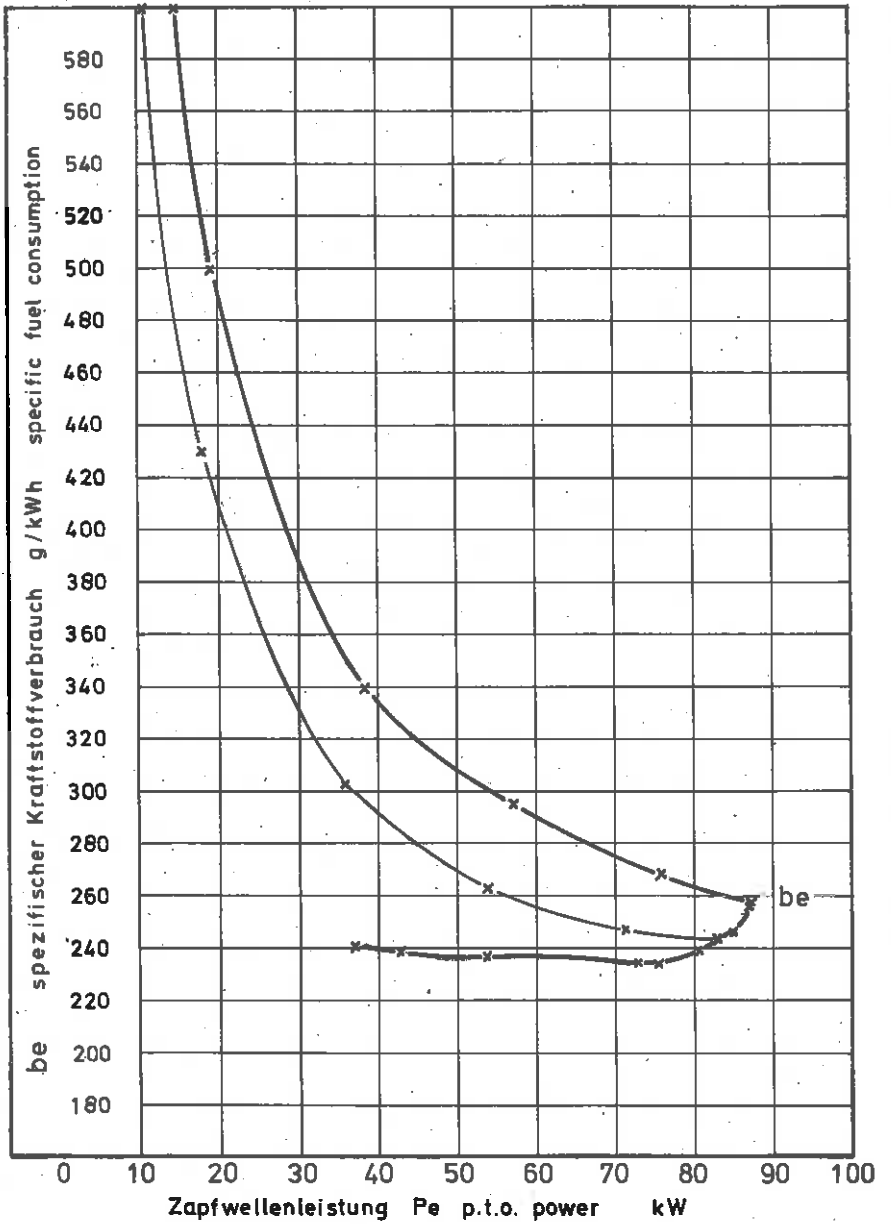

PRÜFUNGS-ABTEILUNG
DEUTZ DX 140-S

(2) DRAWBAR PERFORMANCE

Date of tests: 22nd March till 9th April 1979
Type of track: Concrete

Gear No. and Group	Driving speed km/h	Power kW	Drawbar pull daN	Engine speed rev/min	Slip of wheels %
(i) MAXIMUM POWER with ballast height of drawbar above ground 625 mm					
1 L LO	2,14	43,4	7298	2262	15,0
1 L HI	2,68	54,2	7287	2255	15,0
2 L LO	2,99	60,5	7283	2244	15,1
1 Z LO	3,55	69,7	7070	2200	13,0
2 L HI	3,82	72,7	6851	2197	11,5
3 L LO	4,30	73,0	6109	2198	9,0
1 Z HI	4,69	75,6	5806	2203	8,2
2 Z LO	5,32	74,8	5064	2198	6,8
3 L HI	5,53	76,5	4982	2200	6,8
4 L LO	6,21	75,4	4371	2199	5,6
2 Z HI	6,78	76,7	4073	2196	5,2
3 Z LO	7,51	75,8	3634	2199	4,5
4 L HI	7,90	76,9	3505	2199	4,3
1 S LO	8,54	73,9	3117	2201	3,8
3 Z HI	9,51	76,3	2887	2198	3,5
(ii) FIVE-HOUR-TEST at 75% of pull at maximum power in 4 L LO gear					
4 L LO	6,48	59,0	3278	2257	4,0
(iii) FIVE-HOUR-TEST at pull corresponding to 15% wheel slip in test (i)					
2 L LO	3,00	60,8	7290	-	-
(iv) MAXIMUM POWER without ballast height of drawbar above ground 785 mm					
1 Z HI	4,47	64,5	5197	2247	15,0
2 Z LO	4,90	70,6	5186	2202	15,0
3 L HI	5,12	73,2	5148	2201	14,5
4 L LO	5,90	71,1	4340	2200	10,8
2 Z HI	6,47	76,0	4226	2200	10,3
3 Z LO	7,24	71,9	3577	2199	8,0
4 L HI	7,65	73,9	3477	2200	7,6
1 S LO	8,28	73,4	3189	2199	6,8
3 Z HI	9,26	75,6	2939	2197	6,1
4 Z LO	10,39	73,7	2552	2198	5,2
1 S HI	10,59	74,7	2540	2201	5,1
2 S LO	11,96	70,6	2124	2198	4,2

Total oil consumption during ten hours duration of tests (ii) and (iii) 147 g/h

PRÜFUNGS-ABTEILUNG Test No. 78-31

Tyres make and size: front: 11,00-16 GOODYEAR MULTI RIB 8 ply; rear: 20,8 R 38 CONTINENTAL CONTRACT 8 ply

Tread bar height at the beginning of drawbar tests 93% of the value when new

Specific energy kWh/l	Specific fuel consumpt. g/kWh	Temperatures Fuel °C	Coolant °C	Engine-oil °C	Atmospheric conditions Temperature °C	Relative humidity %	Pressure mbar
tyre inflation pressure 1,2 bar							
2,19	376	16	-	85	11	66	984
2,39	346	16	-	86	11	66	982
2,41	343	16	-	87	11	66	982
2,59	319	17	-	88	12	67	984
2,70	306	17	-	89	9	72	987
2,69	307	15	-	88	8	80	987
2,80	295	15	-	89	8	80	987
2,76	299	14	-	86	9	80	987
2,83	292	14	-	89	9	82	987
2,79	297	13	-	92	8	80	988
2,85	290	13	-	92	9	82	988
2,81	294	13	-	89	9	82	988
2,85	290	13	-	96	10	79	988
2,75	301	13	-	86	10	75	988
2,82	293	13	-	87	10	75	988
2,59	319	14	-	90	9	77	990
-	-	13	-	88	9	85	980
tyre inflation pressure 1,0 bar							
2,55	323	16	-	90	12	58	995
2,61	316	16	-	90	13	58	995
2,72	305	14	-	90	10	70	994
2,65	312	16	-	95	11	75	982
2,80	294	18	-	88	9	65	994
2,67	310	14	-	92	11	75	982
2,73	303	15	-	92	12	72	981
2,71	305	15	-	92	12	75	981
2,79	296	15	-	92	12	74	981
2,73	303	15	-	94	13	71	980
2,76	299	16	-	92	13	71	980
2,64	313	16	-	90	15	71	979

Test (iii) was carried out with additional ballast, the figures not quoted are therefore irrelevant

PRÜFUNGS-ABTEILUNG
DEUTZ DX 140-S

Test No. 78-31

(3) TURNING SPACE AND TURNING CIRCLE

Wheel equipment front: 11,00-16 AS Front 8 ply
rear: 20,8 R 38 AS 8 ply

Track of wheels front: 1596 mm
rear: 1800 mm

	With brakes		Without brakes	
	left-hand m	right-hand m	left-hand m	right-hand m
Radius of turning space	4,59	4,47	5,24	4,97
Radius of turning circle	4,34	4,22	4,99	4,72

(4) LOCATION OF CENTRE OF GRAVITY

Height above ground	997 mm
Distance forward from rear axle centre	981 mm
Distance from tractor's median plane, left hand	9 mm

PRÜFUNGS-ABTEILUNG
DEUTZ DX 140-S Test No. 78-31

(5) BRAKING PERFORMANCE

A) SERVICE BRAKE

Date of tests: 28th March 1979
Type of track: Concrete
Type of decelerometer: MOTO-METER-Bremsverzögerungs- und Pedalkraftschreiber

Weight of ballasted tractor with driver 7695 kg

Cold brakes

		With ballast	Without ballast
Travelling speed	km/h	25,0	25,0
Deceleration	m/s^2	4,5	4,0
Stopping distance	m	6,4	7,9
Force on pedal	daN	36	26
Force on pedal to achieve a deceleration of 2,5 m/s^2	daN	19	17

Brake fade characteristics (hot tests)

Deceleration	hot/cold	%	98	100
Stopping distance	cold/hot	%	94	101
Force on pedal	cold/hot	%	103	100

B) PARKING BRAKE

Tractor facing up 16% slope
Pull on hand brake 28 daN, tractor does not roll

Tractor facing down 16% slope
Pull on hand brake 29 daN, tractor does not roll

PRÜFUNGS-ABTEILUNG
DEUTZ DX 140-S

Test No. 78-31

(6) AMBIENT NOISE EMITTED BY THE TRACTOR

Date of test: 29th March 1979
Type of track: Concrete
Type of sound level meter: BRÜEL AND KJAER model 2209

Results of test

Gear: 4 S HI
Travelling speed before acceleration: 23,8 km/h
Sound level: 88,0 dB(A)

(7) NOISE AT THE DRIVER'S EAR LEVEL

Date of tests: 29th March 1979
Type of track: Concrete
Type of sound level meter: BRÜEL AND KJAER model 2209

A safety cab was fitted on tractor SK 1905-37 LUXUS (MASTER CAB)

Results of tests

Gear no. and group	Drawbar pull at which the tractor develops the maximum sound level	Travelling speed nominal	Travelling speed effective	Sound level
	daN	km/h	km/h	dB(A)
1 L LO	5181	2,43	2,22	81,0
1 L HI	5112	3,05	2,78	81,5
2 L LO	5172	3,41	3,05	82,0
1 Z LO	5147	4,05	3,55	82,0
2 L HI	5122	4,28	3,85	82,0
3 L LO	5116	4,70	4,30	82,5
1 Z HI	5200	5,08	4,48	82,5
2 Z LO	5100	5,68	5,03	82,0
3 L HI	5139	5,90	5,05	81,5
4 L LO	4308	6,55	6,02	82,0
2 Z HI	4117	7,13	6,60	83,5
3 Z LO *)	3476	7,83	7,36	83,0
4 L HI	3454	8,22	7,72	81,5
1 S LO	3179	8,83	8,34	82,5
3 Z HI	2780	9,82	9,37	84,0
4 Z LO	2544	10,90	10,45	83,0
1 S HI	2534	11,08	10,61	82,5
2 S LO	2133	12,40	11,96	81,5
4 Z HI	2000	13,68	13,18	83,0
2 S HI	1755	15,56	15,07	82,0
3 S LO	1529	17,09	16,61	82,0
4 S HI	light load	29,86	31,76	83,0

*) the 3 Z LO gear corresponds to the travelling speed nearest to 7,5 km/h

PRÜFUNGS-ABTEILUNG
DEUTZ DX 140-S

Test No. 78-31

(8) POWER LIFT AND HYDRAULIC PUMP PERFORMANCE


Date of tests: 7th September 1978

HYDRAULIC PUMP

(1)	Opening pressure of relief valve in remote circuit	168 bar
	Sustained pressure by open relief valve	175 bar
(2)	Pump delivery rate at minimum pressure and maximum engine speed	61,0 l/min
(3)	Pump delivery rate	56,5 l/min
	Delivery pressure	169 bar
	Hydraulic Power	15,9 kW

POWER LIFT

Dimensions of linkage geometry for the table on page 28

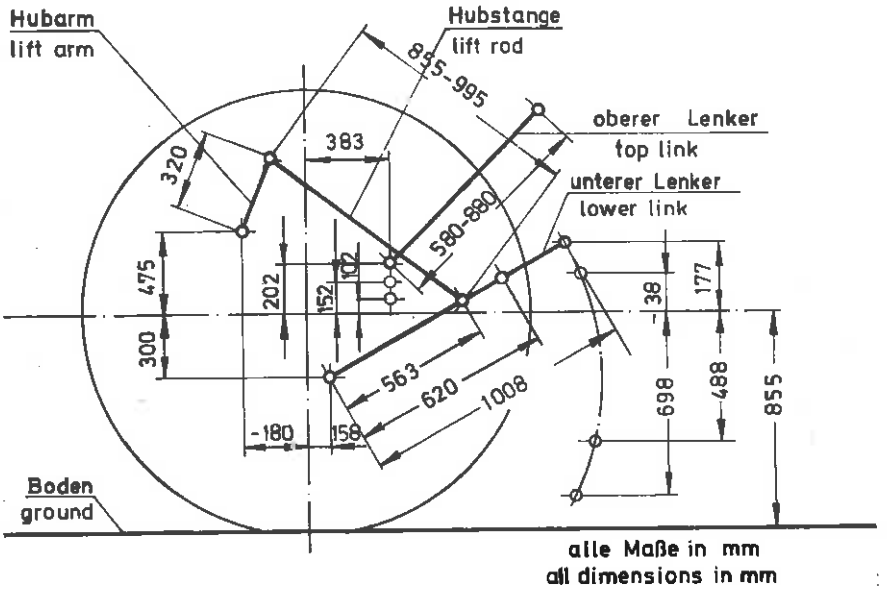

PRÜFUNGS-ABTEILUNG
DEUTZ DX 140-S

LIFTING FORCES

Lifting heights relative to horizontal lower links

mm	-465	-400	-367	-300	-206	-200	-138	-100	0
at hitch points maximum mechanical advantage									
daN							5100	5250	5480
minimum mechanical advantage									
daN	4490	4580		4730		4870		5010	5100

Max. force exerted throughout the whole range 5100 daN

Force at which front of tractor lifts when front axle is ballasted to its max. permissible load (2640 kg) 6290 daN

at test frame	maximum mechanical advantage								
daN			6610	6610		6180		6040	5900
minimum mechanical advantage									
daN					4430	4430		4520	4620

Max. force exerted throughout the whole range 5710 daN

Force at which front of tractor lifts when front axle is ballasted to its max. permissible load (2640 kg) 4130 daN

DLG PRÜFUNGS-ABTEILUNG

Test No. 78-31

+100	+200	+237	+246	+300	+400	+472	+500	+564

lift rods 855 mm long, hole no. 2

5670	5820			5960	6100	6290		

lift rods 995 mm long, hole no. 1

5250	5480		5580					

lift rods 995 mm long, high top link pivot point, hole no. 2

5760	5710	5710						

lift rods 855 mm long, low top link pivot point, hole no. 1

4620	4570			4480	4380		4240	4190

All values of forces for pressure at max. hydraulic power 169 bar, see page 25; calculated from measurements at max. oil pressure 175 bar

LINKAGE GEOMETRY when connected to the standard frame	Maximum mechanical advantage	Minimum mechanical advantage
Projected length in side view:		
Lower links	1008 mm	1008 mm
Lift arms	320 mm	320 mm
Lift rods	995 mm	885 mm
Top link	790 mm	793 mm
Distance of lift rod connection point from pivot point of lower link	620 mm	563 mm
The following dimensions are given relative to rear axle centre line 855 mm above ground		
Lower link pivot point	158 mm behind, 300 mm below	158 mm behind, 300 mm below
Top link pivot point	383 mm behind, 202 mm above	383 mm behind, 102 mm above
Lift arm pivot point	180 mm behind, 475 mm above	180 mm behind, 475 mm above
Maximum and minimum height of lower link hitch points	38 mm below, 698 mm below	177 mm above, 488 mm below
Height of lower link hitch points above ground when locked in highest transport position	817 mm	1032 mm

PRÜFUNGS-ABTEILUNG

DEUTZ DX 140-S

Test No. 78-31

OPTIONAL TESTS

(9) ENGINE PERFORMANCE

Date of tests: 22nd August 1978
Type of dynamometer: SCHENCK eddy-current dynamometer W 400

Power kW	Engine speed rev/min	Fuel consumption total l/h	Fuel consumption total kg/h	Fuel consumption specific g/kWh	Specific energy kWh/l
Maximum power					
At 2-hour test					
92.4	2200	26.62	22.17	240	3.47
At standard p.t.o. speed (1000 rev/min)					
87.8	1917	23.76	19.79	225	3.70
At the speed recommended for drawbar work					
92.4	2200	26.62	22.17	240	3.47
Part loads					
(i) 85% of the torque at maximum power at 2-hour test					
80.1	2242	23.85	19.87	248	3.36
(ii) unloaded					
-	2317	6.12	5.09	-	-
(iii) 50% of the load defined in (i)					
40.5	2271	14.80	12.33	304	2.74
(iv) maximum power					
92.4	2200	26.62	22.17	240	3.47
(v) 25% of the load defined in (i)					
20.5	2291	10.16	8.46	414	2.01
(vi) 75% of the load defined in (i)					
60.5	2259	19.21	16.00	264	3.15

Optimum fuel consumption: 224 g/kWh at 57,2 kW and 1430 rev/min
No load maximum engine speed: 2317 rev/min
Torque at maximum power (2 hours): 401 Nm
Maximum torque: 483 Nm at 1499 rev/min of the engine


Mean atmospheric conditions:	temperature	25 °C
	pressure	1003 mbar
	relative humidity	60 %
Maximum temperatures:	coolant	-
	engine oil	101 °C
	fuel	40 °C
	engine air intake	27 °C

PRÜFUNGS-ABTEILUNG

DEUTZ DX 140-S

Motorleistung
Engine performance

Test Nr. 78-31

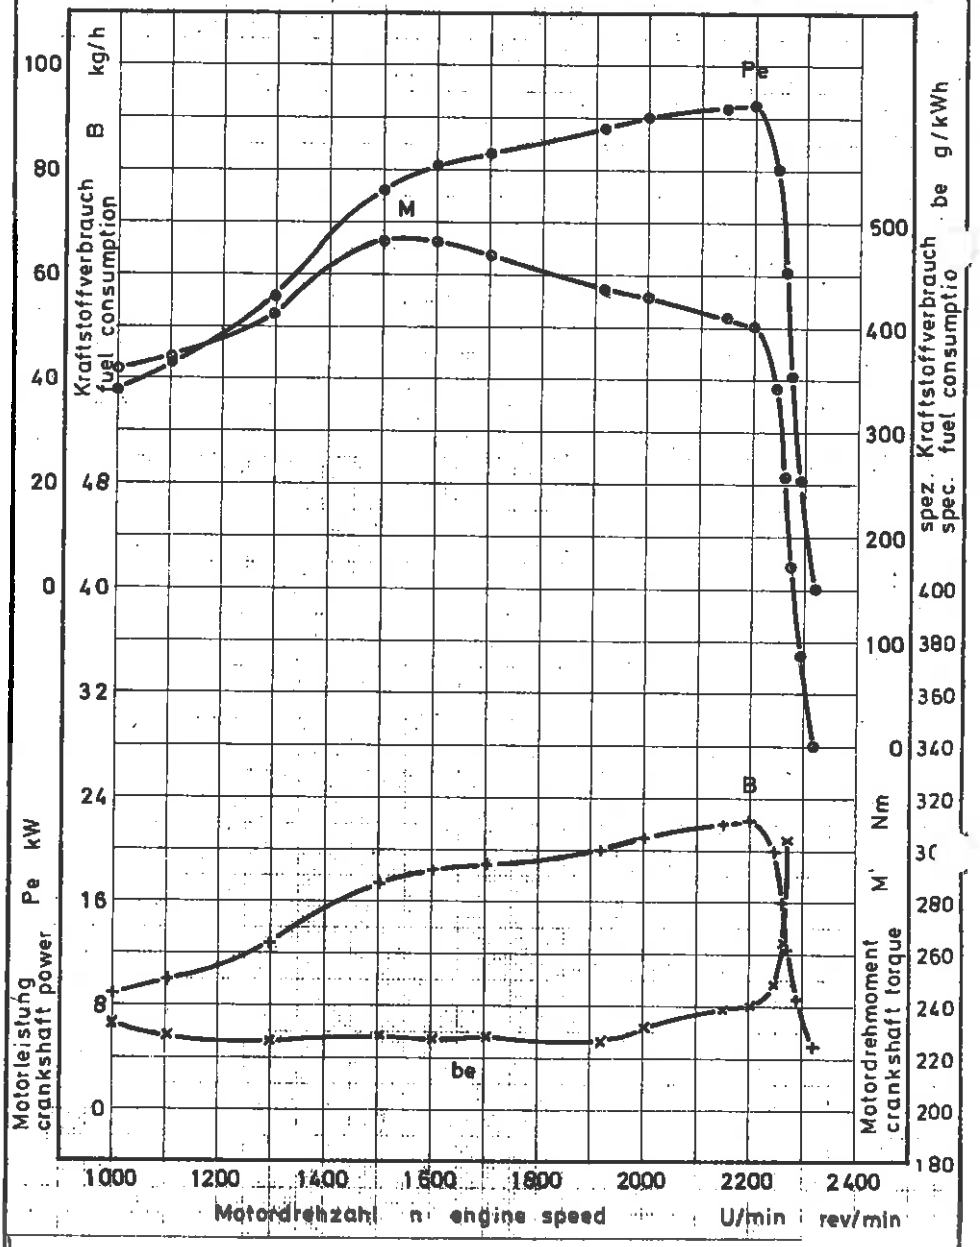


PRÜFUNGS-ABTEILUNG

DEUTZ DX 140-S

Motorleistung

Engine performance

Test Nr. 78-31

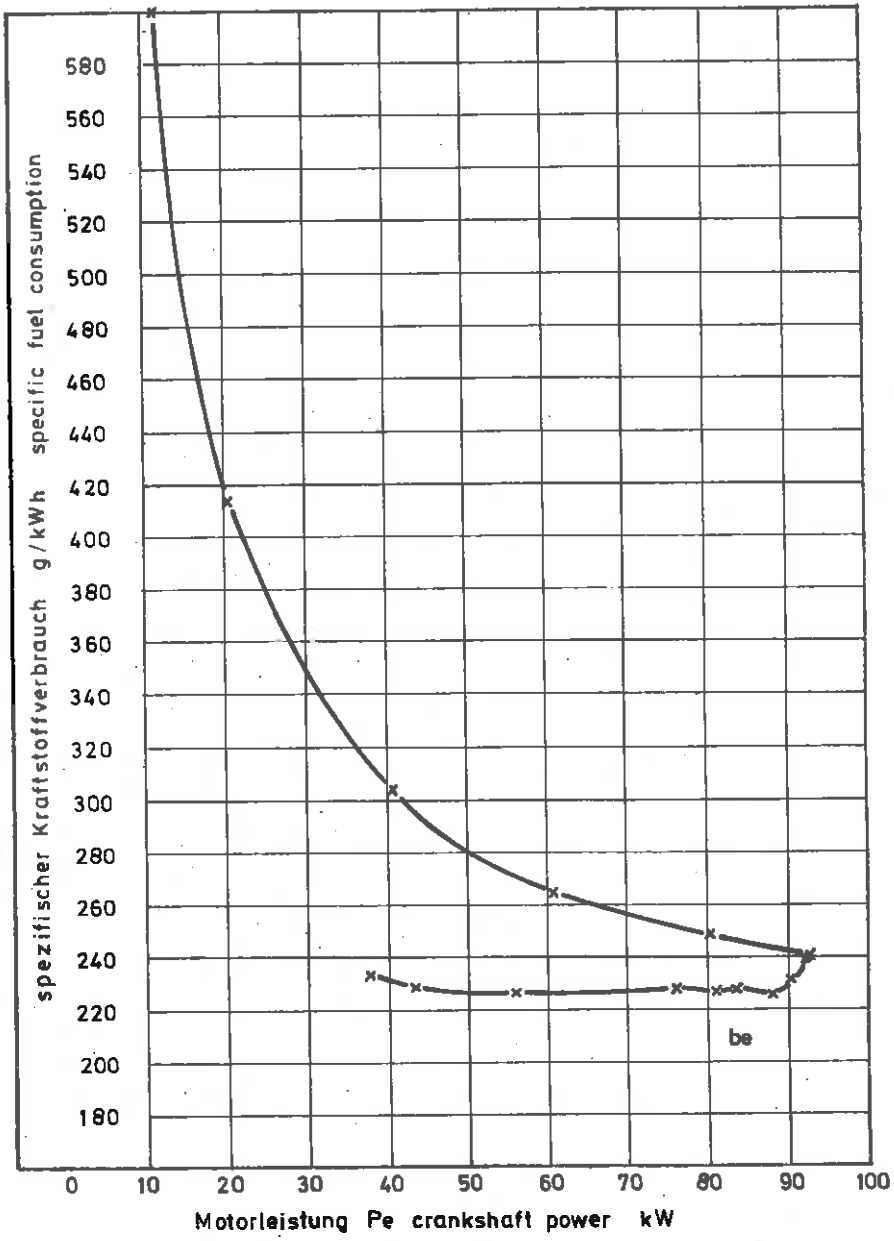

PRÜFUNGS-ABTEILUNG

DEUTZ DX 140-S

Motorleistung

Engine performance

Test Nr. 78-31

Motorleistung in % der Leistung bei Nenndrehzahl

engine power in % of power at rated engine speed

Published
with the support of the Federal Minister for Food, Agriculture and Forestry

Deutsche Landwirtschafts-Gesellschaft e.V. (DLG)
Fachbereich Landtechnik — Prüfungsabteilung —
Zimmerweg 16 (DLG-Haus)
D-6000 Frankfurt am Main 1