



**Report on test in accordance with OECD
STANDARD CODE 2 for the Official Testing
of Agricultural and Forestry Tractor Performance**

Restricted Code

OECD No. 2/1740

Date of approval: 09th March 1998



Agricultural Tractor

URSUS 6014 (4WD)

Manufacturer

**Zakłady Przemysłu Ciągnikowego
„URSUS”, Warszawa, Poland**

**INSTYTUT BUDOWNICTWA, MECHANIZACJI I ELEKTRYFIKACJI ROLNICTWA
w Warszawie, Oddział Kłudzienko**

IBMER, 05-824 Kłudzienko, PL

**telefon: +48 22 755-50-16
telex: 81-22-31
telefax: +48 22 755-60-45**

This is a report on a tractor test in accordance with OECD STANDARD CODE for the Official Testing of Agricultural and Forestry Tractor Performance, CODE 2, Paris 1998.

It does not contain an evaluation of the tractor on practical work.

Duration of tests: January till October 1997

This report has been approved by the OECD Co-Ordinating Centre (CEMAGREFF France) as being in accordance with the OECD STANDARD CODE.

TABLE OF CONTENTS

	page
1. SPECIFICATION OF TRACTOR	1
1.1 Identification.....	1
1.2 Engine.....	1
1.3 Transmission.....	3
1.4 Power take-off.....	5
1.5 Hydraulic power lift.....	6
1.6 Three point linkage.....	7
1.7 Swinging drawbar.....	10
1.8 Trailer hitch I and II	10
1.9 Holed drawbar	11
1.10 Steering	11
1.11 Brakes.....	11
1.12 Wheels.....	11
1.13 Protective structure	12
1.14 Seat	12
1.15 Lighting	13
2. TEST CONDITIONS	13
2.1 Overall dimensions	13
2.2 Ground clearance.....	13
2.3 Tractor mass	13
2.5 Tyres and track width specifications	14
2.6 Fuel.....	14
2.7 Oils and lubricants.....	14
3. COMPULSORY TEST RESULTS	16
3.1 Main power take-off.....	16
3.2 Hydraulic power and lifting force	20
3.3 Drawbar power test (unballasted tractor)	22
4. OPTIONAL TEST RESULTS	24
4.1 Turning area and turning circle	24
4.2 Location of centre of gravity	24
4.3 Braking.....	24
4.4 Measurement of external noise	27
5. REPAIRS	27
6. REMARKS	27



- Tractor manufacturer name and address: Zakłady Przemysłu Ciągnikowego „URSUS”, 02-495 Warszawa, Traktorzystów 10
- Location of tractor assembly: same
- Submitted for test by: The manufacturer
- Selected for test by: The manufacturer with agreement by IBMER
- Place of running-in: Zakłady Przemysłu Ciągnikowego „URSUS”
- Duration of running-in: 50 hours
- Location of test: IBMER-ZMT 05-824 Kłodzianko, Poland

1 SPECIFICATION OF TRACTOR

1.1 Identification

- Make: URSUS
- Model: 6014
- Type: wheeled tractor, four wheel drive
- Number of driving wheels: 4
- Serial N°: 15263
- 1st serial N°: 15263

1.2 Engine

- Make: URSUS
- Model: T 4390 specification No 87080
- Type: water-cooled 4-stroke Diesel, direct injection, supercharged
- Serial N°: P009627A

1.2.1 Cylinders

- Number: 4
- Dispositions: in line
- Bore / Stroke: 98,43 / 127 mm
- Capacity: 3865 cm³
- Compression ratio: 15,25
- Arrangement of valves: overhead, in line
- Cylinder liners: dry, replaceable

1.2.2 Supercharging

- Make: GARRET
- Model: TA 0315



- Type: turbocharger
- Pressure: 0.9 MPa

1.2.3 *Fuel system*

- Fuel feed system: with water separator type FS04-00.00, diaphragm fuel feed pump type 47 PMO 4
- Make, model, type of fuel filter(s) : 1, with replaceable cartridge type B405419141
- Capacity of fuel tank: 80+60=120 dm³
- Make, model, type of injection pump: WSK Poznań under licence LUCAS CAV, rotative DPA 3343F520
- Serial N°: 0003KNp
- Manufacturer's production setting of injection pump:
 - Flow rate:(rated engine speed and full load) 17,81 dm³/h
 - Timing: 20° before T.D.C.
- Make, model, type of injectors: CAV ENGLAND PERKINS LRB6701407 GL multihole Lucas CAV FLG-I 6801027
- Injection pressure: 23.0 MPa

1.2.4 *Governor*

- Make, model, type: WSK Poznań under licence LUCAS CAV, mechanical, variable speed, incorporated into fuel injection pump
- Governed range of engine speed: 750 ÷ 2310 rev/min
- Rated engine speed: 2200 rev/min

1.2.5 *Air cleaner*

- Main cleaner
 - Make, model, type: DONALDSON, two elements: P124767; XLP 18-2093 dry paper element filter with replaceable cartridge
 - Location of air intake: under bonnet
- Maintenance indicator: on dashboard

1.2.6 *Lubrication system*

splash and pressure lubrication with oil cooler



- Type of feed pump: gear pump
- Type of filter(s) : full flow oil filter Perkins POWERPART 2654403
- Number of filters: 1

- 1.2.7 Cooling system**
 - Type of coolant: water or water-anti freeze mixture
 - Type of pump: centrifugal
 - Specification of fan: 2 belt driven
 - Number of fan blades: 8
 - Fan diameter: 411 mm
 - Coolant capacity: 16,8 dm³
 - Type of temperature control: thermostatic
 - Superpressure system: 70 kPa

- 1.2.8 Starting system**
 - Make, model, type: electrical
ELMOT, R11g-12 V, electromagnetic engagement
 - Starter motor power rating: 3,0 kW
 - Cold starting aid: THERMOSTART SINTEROM 357/11, 12V
 - Safety device: only operable when the range gear (L, H) lever is in neutral position

- 1.2.9 Electrical system**
 - Voltage: 12 V
 - Generator: alternator
 - Make, model, type: ELMOT, A133-55, 14V 55 A
 - Power: 0,7 kW
 - Battery of accumulators: 12V, ZAP Piastów, 6SK-120
 - Number: 1
 - Rating: 120 Ah at 10 hours

- 1.2.10 Exhaust system**
 - Make, model, type: vertical pipe, Ø 53 mm
 - Location: at the right side of the engine, height of outlet above ground - 2710 mm

- 1.3 Transmission**
 - 1.3.1 Clutch**
 - Make: only for travelling
URSUS
 - Model: single action
 - Type: dry



- Number of plates: 1
- Diameter of plates: 327 mm
- Method of operation: mechanical by pedal

1.3.2 *Gear box*

- Make: URSUS
- Model: mechanical
- Type: with planetary reduction unit
- Arrangement:
 - gear box with 3 (forward) + 1 (reverse) speeds (2 and 3 synchronized);
 - range gear (synchronized) H and L;
 - planetary reduction unit („Turtle”, „Hare”)
- Number of gears: 12 forward,
4 reverse
- Available options: 8 speed:
 - gear box with 4 (forward) + 1 (reverse) speeds;
 - planetary reduction unit (L, H)

1.3.3 *Rear axle and final drives*

- Make: URSUS
- Model: crown wheel and pinion differential
- Type: planetary final drives
- Differential lock:
 - Type: mechanical, dog clutch
 - Method of engagement: mechanical by pedal
 - Method of disengagement: self-disengaging

1.3.4 *Front axle and final drives*

- Make: URSUS
- Model: with non central shaft
- Type: crown wheel and pinion differential,
planetary final drives
- Differential lock:
 - Type: limit sleep
 - Method of engagement: automatic
 - Method of disengagement: automatic



1.3.5 Total ratios and travelling speeds

Gear No	Group of range	Reduction unit	Number of engine revolutions for one revolution of the driving wheels	Nominal travelling speed *) at rated engine speed of 2200 rev/min, km/h
forward				
1	L	„Turtle”	316.16	1.95
1		„Hare”	251.23	2.46
2		„Turtle”	210.78	2.93
2		„Hare”	167.49	3.69
3		„Turtle”	114.98	5.37
3		„Hare”	91.36	6.76
1	H	„Turtle”	77.31	7.99
1		„Hare”	61.43	10.06
2		„Turtle”	51.54	11.99
2		„Hare”	40.95	15.09
3		„Turtle”	28.11	21.98
3		„Hare”	22.33	27.67
reverse				
R	L	„Turtle”	210.78	2.93
		„Hare”	167.49	3.69
	H	„Turtle”	51.54	11.99
		„Hare”	40.95	15.09

*) Calculated with a tyre dynamic radius index of 745 mm (ISO 4251-1 1992)

- Number of revolutions of front wheels for one revolution of rear-wheels:

1,43

1.4 Power take-off

1.4.1 Main power take-off

- Type: independent
- Method of engagement: wet hydraulic multiplate clutch
- Number of shafts: 1
- Method of changing power take-off shaft ends and speeds: by changing PTO shaft



1.4.1.1 Power take-off proportional to engine speed

Power take off at 540 rev/min

- Location: at the rear of the tractor
- Diameter of power take-off shaft end: 35 mm
- Number of splines: 6 (in conformity with ISO 500 - 1991)
- Height above ground: 618 mm
- Distance from the median plane of the tractor: 0 mm
- Distance behind rear-wheel axis: 376 mm
- PTO speed at rated engine speed: 596 rev/min
- Engine speed at standard PTO speed: 1993 rev/min
- Ratio of rotation speeds: 3,69
- Power restriction: 48,0 kW;
- Maximum torque transmissible: 86,6 daNm
- Direction of rotation (viewed from behind tractor): clockwise

Power take off at 1000 rev/min

- Location: at the rear of the tractor
- Diameter of power take-off shaft end: 35 mm
- Number of splines: 21 (in conformity with ISO 500 - 1991)
- Height above ground: 618 mm
- Distance from the median plane of the tractor: 0 mm
- Distance behind rear-wheel axis: 376 mm
- PTO speed at rated engine speed: 1100 rev/min
- Engine speed at standard PTO speed: 2000 rev/min
- Ratio of rotation speeds: 2,00
- Power restriction: none
- Maximum torque transmissible: none
- Direction of rotation (viewed from behind tractor): clockwise

1.5 Hydraulic power lift

- Make: URSUS
- Model: mechanical-hydraulic power lift;
position and load control
- Type: lever type



IBMER - Kłodzianko
URSUS 6014 (4WD)

Test No. ZMT 97-23

- Type of hydraulic system: open with draught, position and response control
- Type and number of cylinders: single acting, 3, - one internal and two external,
- Type of linkage lock for transport: none
- Relief valve pressure setting: 20,7 ÷ 24,0 MPa
- Opening pressure of cylinder safety valve: 25,5 MPa
- Lift pump type: 2,
1-st: 4-cylinder piston
2-nd: gear
- Transmission between pump and engine: 1-st: from PTO transmission (non disengaged)
2-nd: from engine, engaged by hand lever
- Type and number of filters: 1, suction strainer
- Site of oil reservoir: gear box
- Type, number and location of tapping points: four at the rear of tractor, quick release 12,5 in conformity with ISO 5675-1992.
- Maximum volume of oil available to external cylinders: 16 dm³

1.6 Three point linkage

- Category: 2, in conformity with ISO 730/1-1994
- Category adapter: none

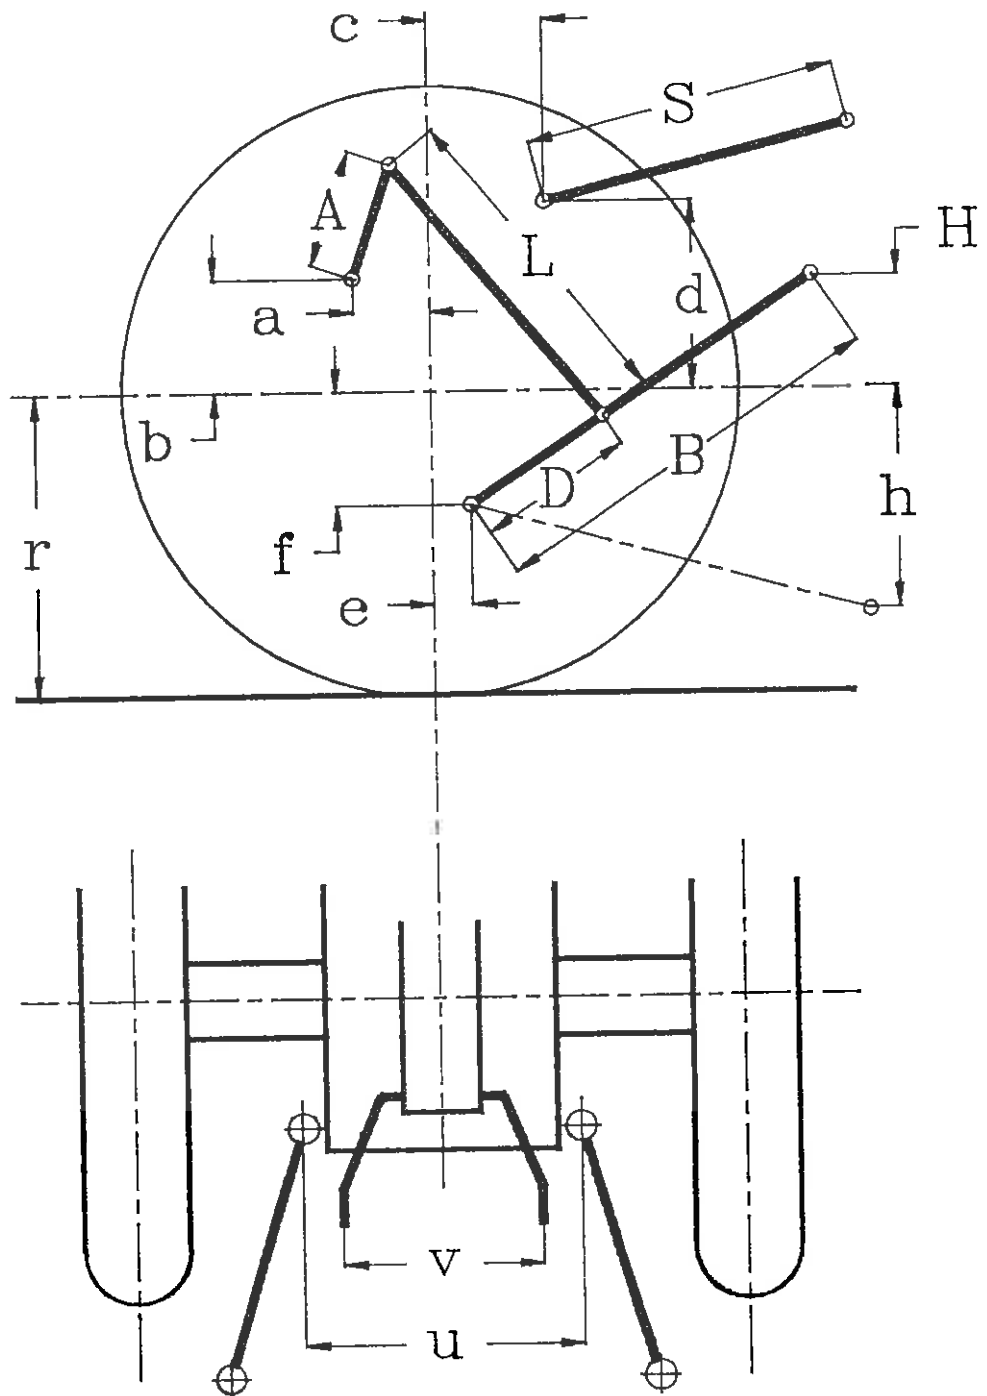


Figure 1
Lift test - Linkage geometry



		Dimension of range mm	Settings used in test mm
Length of lift arms:	(A)	266,7	
Length of lower links:	(B)	1033	
Distance of lift arm pivot point from rear-wheel axis:	- horizontally: (a)	195,73	
	- vertically: (b)	232,56	
Horizontal distance between the 2 lower link points:	(u)	492	
Horizontal distance between the 2 lift arm end points:	(v)	534	
Length of upper link:	(S)	740 ÷ 890	806
Distance of upper link pivot point from rear wheel axis:	- horizontally: (c)	A): 186; B): 200; C): 216	200
	- vertically: (d)	A): 205; B): 171; C): 132	171
Distance of lower link pivot point from rear wheel axis:	- horizontally: (e)	- 31,75	
	- vertically: (f)	212,34	
Distance of lower link pivot points to lift rod pivot points on lower links:	(D)	466; 600	600
Length of lift rods:	(L)	675 ÷ 745	705
Height of lower hitch points relative to the rear-wheel axis:	- in low position: (h)	360 ÷ 561	455
	- in high position: (H)	100 ÷ 173	165
Height above ground of lower hitch points when locked in transport position*)		Any height within lift range	

*) Assuming r = 745 tyre dynamic radius index of ISO 4251/1-1992

Table 2.1
Dimensions of linkage geometry
when connected to the standard frame



1.7 Swinging drawbar

- Type: fork, pulled out
- Height above ground: 352, 346, 343 mm
- Type of adjustment: mechanical, by pin replacement
- Distance of hitch point from rear-wheel axis, horizontally: 611, 726, 776 mm
- Distance of hitch point from power take-off shaft end:
 - Vertically: 266, 272, 275 mm
 - Horizontally: 235, 350, 400 mm
- Lateral adjustment (centre of clevis):
 - Right hand: - none
 - Left hand: - none
- Diameter drawbar pin hole: 33,3 mm
- Maximum vertical permissible load: 15,8 kN

1.8 Trailer hitch I

- Type: clevis with rubber shock absorber
- Hole diameter: 31,5 mm
- Height above ground: 958 mm
- Distance of hitch point from rear-wheel axis, horizontally: 636 mm
- Distance of hitch point from power take-off shaft end:
 - Vertically: 340 mm
 - Horizontally: 260 mm
- Maximum vertical permissible load: 8,8 kN

1.8.1 Trailer hitch II

- Type: Hitch-hook
- Hook diameter: 47 mm in conformity with ISO 6489-1
- Height above ground: 386, 380, 377 mm
- Distance of hitch point from rear-wheel axis, horizontally: 526, 641, 691 mm
- Distance of hitch point from power take-off shaft end:
 - Vertically: 232, 238, 241 mm
 - Horizontally: 150, 265, 315 mm
- Maximum vertical permissible load: 15,8 kN



1.9 Holed drawbar

- Number of holes: 6
- Distance between holes: 120, 80, 40, 80, 120 mm
- Hole diameter: 22 mm
- Thickness/width of the drawbar: 25 / 80 mm
- Height above ground:
 - Maximum: 1055 mm
 - Minimum: 85 mm
- Horizontal distance to power take-off shaft: 657 mm

1.10 Steering

- Make: URSUS
- Model: ORBITROL
- Type: OSPB 100
- Method of operation: hydrostatic
 - Pump(s): 1
 - Ram(s): 1
- Working pressure: 11,0 MPa

1.11 Brakes

1.11.1 Service brake

- Make: URSUS
- Model: disc brakes
- Type: oil immersed, acting on rear wheels
- Method of operation: two pedals, mechanically actuated, independent, or combined operation
- Trailer braking take-off: air brakes, air compressor WABCO, single pipe system

1.11.2 Parking brake

- Type: mechanical, coupled to both service brakes
- Method of operation: hand lever with ratchet

1.12 Wheels

- Number: 4
 - Front: 2, driving and steering - 12.4 - 24 6 PR
 - Rear: 2, driving - 16.9 - 34 8 PR
- Wheel base: 2340 mm



- Track width adjustment:

	Minimum mm	Maximum mm	Adjustment method
Front	1480	1820	offset lug rims and reversing wheel centres
Rear	1510	2220	offset lug rims and reversing wheel centres

1.13 Protective structure

- Make: „SPOMASZ”
- Model: protective cab
- Type: 07S
- Manufacturer's name and address: Fabryka Urządzeń Mechanicznych „SPOMASZ”, Sokółka, Poland
- Protective device: Cab, not tiltable
- OECD approval:
 - Approval number: CSD 1416/3
 - Date of approval: 12 June 1997

1.14 Seat

1.14.1 Driver's seat

- Make: „AGROMET KUNÓW”
- Model: Grammer
- Type: MFP-3
- Type of suspension: spiral spring
- Type of damping: hydraulic damper
- Range of adjustment:
 - Longitudinal: 150 mm
 - Vertical: 60 mm
- Safety belt: no



1.15 Lighting

	Height above ground of centre mm	Size mm	Distance from outside edge of lights to median plane of tractor mm
Headlights	1102	Ø 125	216
Sidelights	1720	65 x 67	745
Rearlights	1555	70 x 95	732
Reflectors	1090	Ø 75	815

2 TEST CONDITIONS

2.1 Overall dimensions

	Length mm	Width		Height at top of	
		minimum mm	maximum mm	protective structure mm	exhaust pipe mm
Unballasted	3850	2010	2730	2550	2710

2.2 Ground clearance (unballasted tractor) 350 mm

- Clearance-limiting part: trailer hitch-hook

2.3 Tractor mass

- Mass (with cab):

	Unballasted	
	Without driver kg	With driver kg
Front	1460	1488
Rear	2215	2262
Total	3675	3750



2.5 Tyres and track width specifications

	Front	Rear
Tyres:	STOMIL Olsztyn	
dimensions:	12.4-24	16.9-34
ply rating:	6 PR	8 PR
type:	diagonal	diagonal
maximum load (tyre manufacturer's)	11,7 kN	23,3 kN
maximum load (tractor manufacturer's)	11,7 kN	23,3 kN
inflation pressure (tyre manufacturer's)	170 kPa	170 kPa
dynamic radius index:	540 mm	745 mm
Chosen track width:	1510 mm	1510 mm

2.6 Fuel

- Type:

DZ/DL in conformity with Polish standard PN-92/C-96051

- Density at 15° C

0,842 g/cm³

2.7 Oils and lubricants

2.7.1 Capacity and change interval

	Capacity dm ³	Oil change h	Filter change h
Engine	8,3	250	250
Gear box, rear axle, hydraulic system	44,0	1000	1000 (clearing)
Rear final drives	3,4	1000	-
Front axle	5,5		
Front final drives	3,0		
Steering	2,25	500	500



2.7.2 *Specifications:*

	Recommended	Used during test
Engine oil Type: Viscosity: Classification:	FALCO SUPEROL SAE 15W/40 API-CD	FALCO SUPEROL SAE 15W/40 API-CD
Transmission and hydraulic system oil Type: Viscosity: Classification:	AGROL SAE 80/90 API GL-4	AGROL U SAE 80/90 API GL-4
Steering oil Type: Viscosity: Classification:	ATF 200 SAE 10W/30 API GL-4	ATF 200 SAE 10W/30 API GL-4

2.7.3 *Grease*

- Number of lubrication points:

ŁT 42

23



3 COMPULSORY TEST RESULTS

3.1 Main power take-off

- Date and location of test: 29.01.97, ZMT-IBMER Kludzienko
- Type of dynamometer bench: Schenck W-450

Power kW	Speed		Fuel consumption			Specific energy kWh/l
	Engine rev/min	PTO rev/min	Hourly		Specific.	
			kg/h	l/h	g/kWh	
3.1.1 MAXIMUM POWER - TWO-HOUR TEST						
58,47	2240	1120	15,34	18,22	262,4	3,21
3.1.2 POWER AT RATED ENGINE SPEED						
58,24	2200	1100	15,00	17,81	257,6	3,27
3.1.3 STANDARD POWER TAKE-OFF SPEED						
55,74	2000	1000	13,81	16,40	247,8	3,40
3.1.4 PART LOADS (curve a)						
3.1.4.1 the torque corresponding to maximum power at rated engine speed						
58,24	2200	1100	15,00	17,81	257,6	3,27
3.1.4.2 85 % of torque obtained in 4.1						
51,48	2288	1144	14,03	16,66	272,5	3,09
3.1.4.3 75 % of torque obtained in 4.2						
39,03	2308	1154	11,54	13,71	295,6	2,85
3.1.4.4 50 % of torque obtained in 4.2						
26,26	2334	1167	9,65	11,46	367,6	2,29
3.1.4.5 25 % of torque obtained in 4.2						
13,36	2360	1180	7,41	8,80	554,4	1,52
3.1.4.6 unloaded						
-	2378	1189	5,50	6,53	-	-
3.1.5 PART LOADS AT STANDARD POWER TAKE-OFF SPEED (curve b)						
3.1.5.1 the torque corresponding to maximum power						
55,74	2000	1000	13,81	16,40	247,8	3,40
3.1.5.2 85 % of torque obtained in 5.1						
48,06	2030	1015	12,16	14,44	253,1	3,33
3.1.5.3 75 % of torque obtained in 5.2						
36,58	2056	1028	10,03	11,91	274,1	3,07
3.1.5.4 50 % of torque obtained in 5.2						
24,77	2092	1046	8,11	9,63	327,4	2,57
3.1.5.5 25 % of torque obtained in 5.2						
12,60	2116	1058	6,11	7,26	485,0	1,74
3.1.5.6 unloaded						
-	2142	1071	4,34	5,15	-	-





IBMER - Kłodzianko
URSUS 6014 (4WD)

Test No. ZMT 97-23

- No load maximum engine speed: 2378 rev/min
- Torque (equivalent crankshaft) at maximum power: 24,93 daNm
 - at rated engine speed: 25,28 daNm
 - at standard power take-off speed: 26.61 daNm
- Maximum torque (equivalent crankshaft): 31,04 daNm
(engine speed): 1300 rev/min

Mean atmospheric conditions:	
Temperature:	16° C
Pressure:	1019 hPa
Relative humidity:	55 %
Maximum temperatures:	
Coolant:	95° C
Engine oil:	100° C
Fuel:	30° C
Engine air intake:	20° C

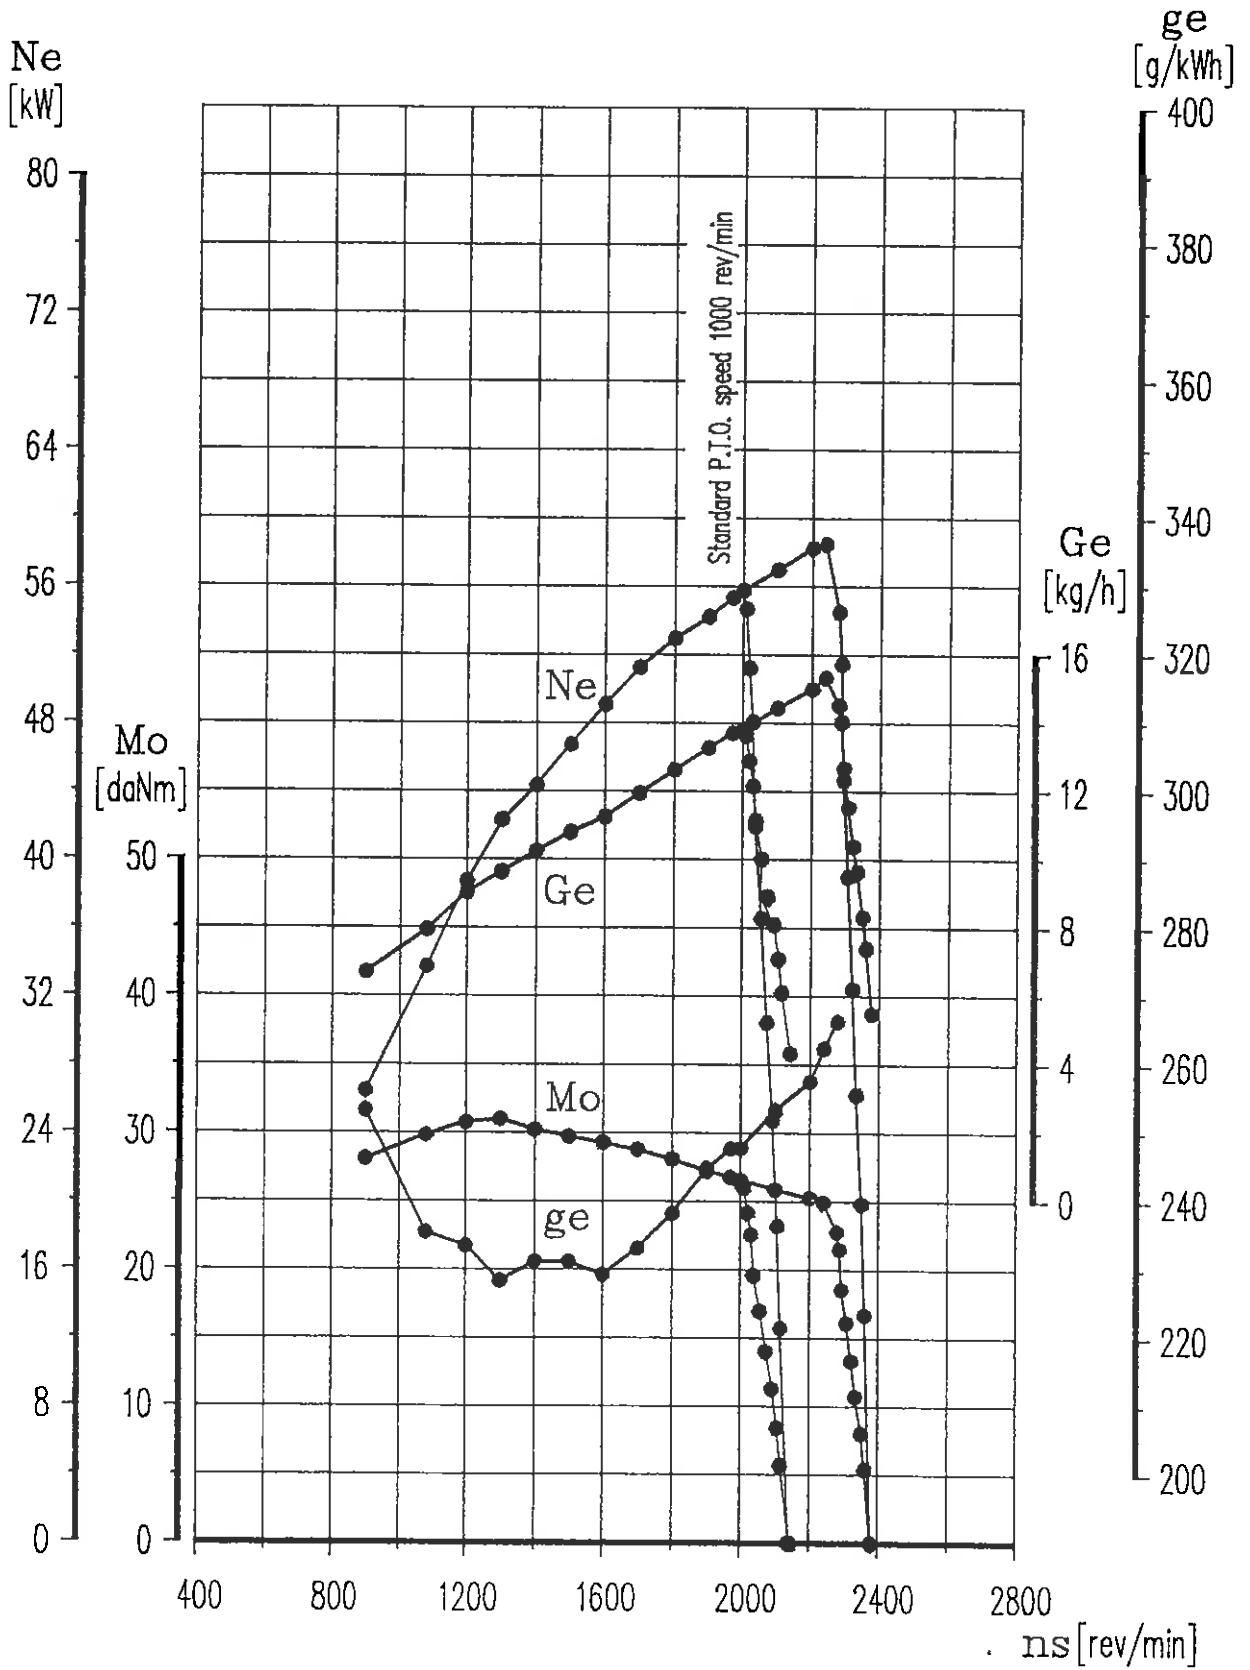

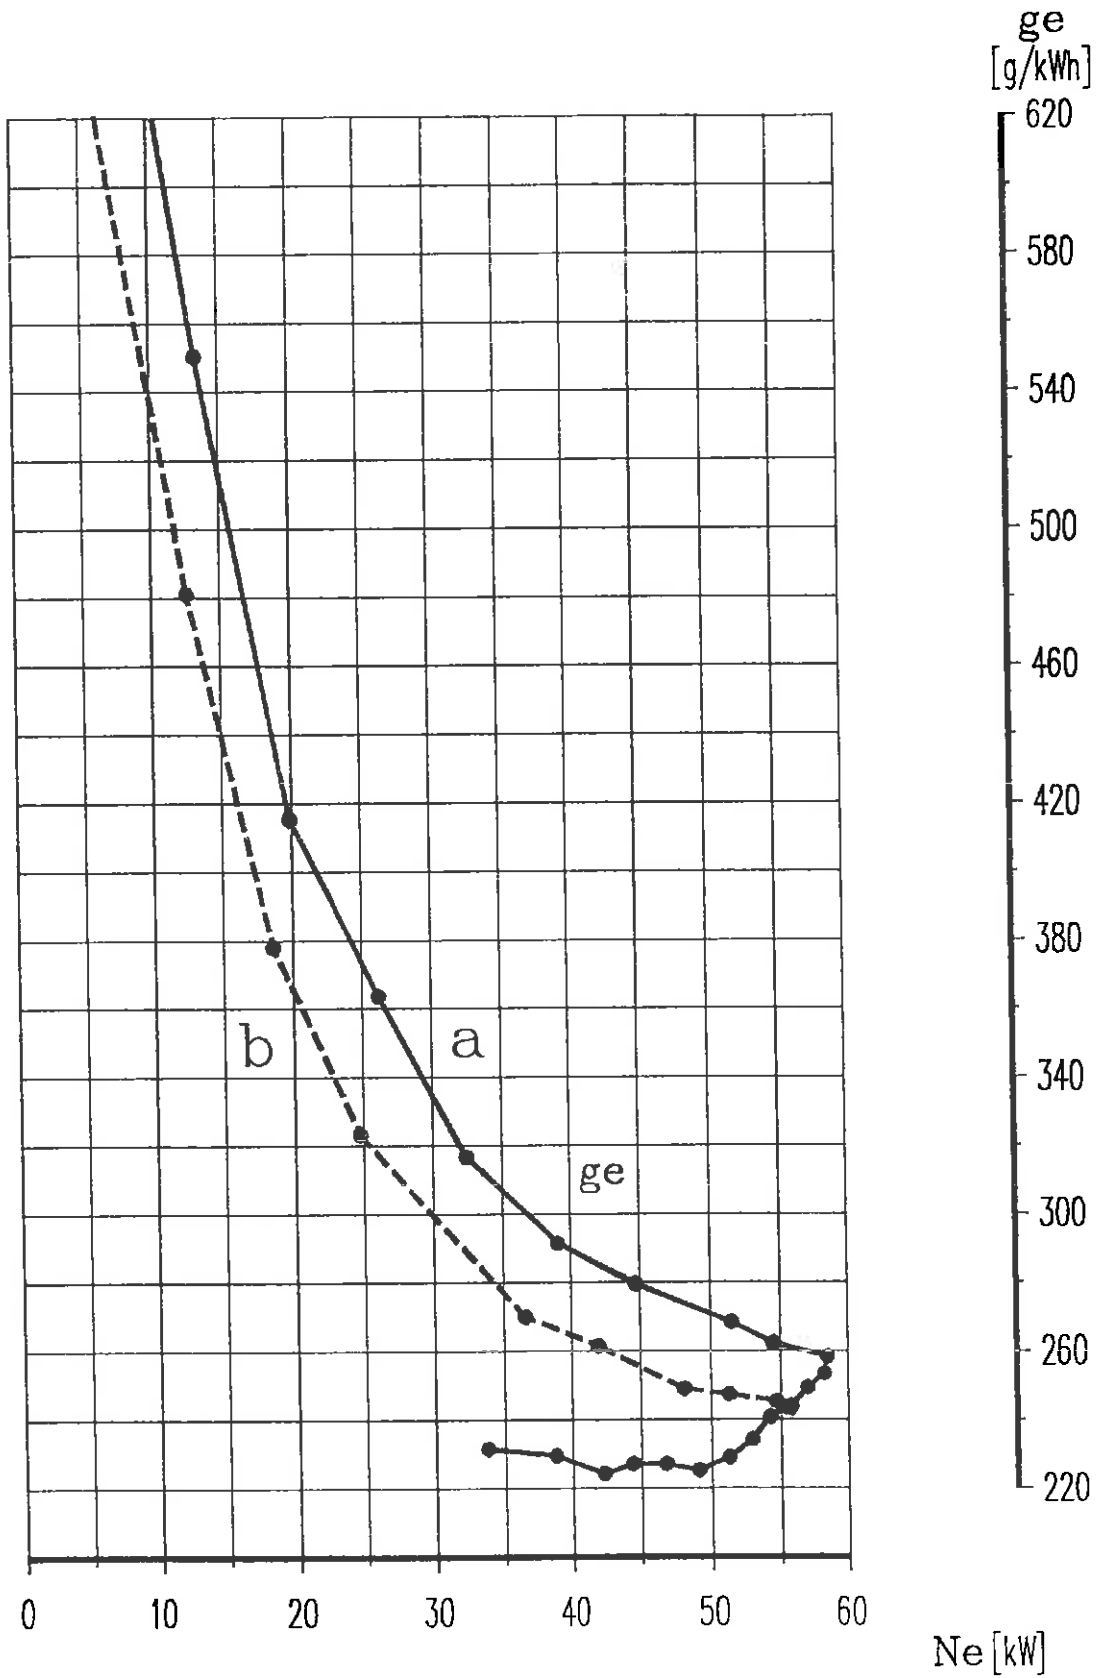



3.2 Hydraulic power and lifting force

- Date of test: 11.08.97

3.2.1 Hydraulic power test

- Sustained pressure with relief valve open: 19,50 MPa
 - Pump stalled: yes
 - Pump delivery rate at minimum pressure: 61,28 l/min

	Flow rate l/min	Pressure MPa	Power kW
Flow rate corresponding to a hydraulic pressure equivalent to 90 % of the actual relief valve pressure setting and corresponding hydraulic power	53,87	17,55	15,76
Flow rate and hydraulic pressure corresponding to maximum hydraulic power	55,71	17,00	15,78

- Tapping point used for test: rear

3.2.2 Power lift test

- Linkage settings for test - see Table 2.1 and Figure 1.

	at the hitch point	on the frame
Height of lower hitch points above ground in down position	290 mm	250 mm
Vertical movement	620 mm	771 mm
Maximum corrected force exerted through full range	35,51 kN	24,53 kN
Corresponding pressure of hydraulic fluid	17,55 MPa	17,55MPa
Moment about rear-wheel axis	-	39,52 kNm
Maximum tilt angle of mast from vertical	-	10,5 degrees



Lifting heights relative to the horizontal plane including the lower link pivot points											
mm	-283	-243	-200	-100	0	+100	+200	+300	+377	+400	+488
Lifting forces (the values of force measured shall be corrected to correspond to a hydraulic pressure equivalent to 90 % of the actual relief valve pressure setting of the hydraulic lift system)											
at the hitch points in kN	-	35,51	36,30	36,95	37,08	36,60	36,03	36,08	35,51	-	-
Corresponding pressure: 17,55 MPa											
at the frame in kN	30,34	-	30,38	30,42	28,98	27,99	26,97	25,48	-	24,53	24,53
Corresponding pressure: 17,55 MPa											



3.3 Drawbar power test (unballasted tractor)

- Date of test: 26.08.97
 - Type of track: concrete

Gear and range	Power	Drawbar pull	Speed	Engine speed	Slip of wheels	Specific fuel consumption
	kW	kN	km/h	rev/min	%	g/kWh
3.3.1 MAXIMUM POWER IN TESTED GEARS (unballasted tractor)						
L1Turtle	11,94	24,01	1,79	2353	14,5	682,6
L1Hare	15,01	24,01	2,25	2353	14,5	543,0
L2Turtle	17,74	24,01	2,65	2334	14,5	535,5
L2Hare	22,28	24,01	3,34	2332	14,5	439,9
L3Turtle	32,01	24,01	4,80	2297	14,5	381,1
L3Hare	40,02	24,01	6,00	2284	14,5	359,8
H1Turtle	43,92	21,99	7,19	2240	11,7	346,1
H1Hare	45,70	17,71	9,29	2230	8,9	334,8
H2Turtle	44,23	14,14	11,26	2230	7,3	345,9
3.3.2 FUEL CONSUMPTION						
3.3.2.1 in selected gear, at maximum power at rated speed						
H1Hare	45,70	17,71	9,29	2230	8,9	334,8
3.3.2.1.1 75 % of pull at maximum power at rated speed						
H1Hare	35,97	13,28	9,75	2291	6,9	361,4
3.3.2.1.2 50 % of pull at maximum power at rated speed						
H1Hare	24,93	8,86	10,13	2332	5,0	417,2
3.3.2.1.3 next higher gear at reduced engine speed; same pull and travel -						
H2Turtle	35,97	13,28	9,75	1921	6,9	337,5
3.3.2.1.4 next higher gear at reduced engine speed; same pull and travel -						
H2Turtle	24,93	8,86	10,13	1956	5,0	389,1
3.3.2.2 in selected gear nearest to 7,5 km/h at rated speed						
H1Turtle	43,92	21,99	7,19	2240	11,7	346,1
3.3.2.2.1 75 % of pull at maximum power at rated speed						
H1Turtle	35,04	16,49	7,65	2292	8,2	371,0
3.3.2.2.2 50 % of pull at maximum power at rated speed						
H1Turtle	24,23	11,00	7,93	2320	5,9	431,3
3.3.2.2.3 next higher gear at reduced engine speed; same pull and travel -						
H1Hare	35,04	16,49	7,65	1822	8,2	316,2
3.3.2.2.4 next higher gear at reduced engine speed; same pull and travel -						
H1Hare	24,23	11,00	7,93	1844	5,9	367,3



		Tyre inflation pressure	
	Height of drawbar above ground	Front	Rear
Unballasted	550 mm	100 kPa	140 kPa

Specific energy kWh/l	Fuel °C	Temperature		Atmospheric conditions		
		Coolant °C	Engine oil °C	Temperature °C	Relative humidity %	Pressure kPa
1,23	35	80	92	16	45	100,5
1,55	35	82	93	16	45	100,5
1,57	34	81	95	17	45	100,5
1,91	35	82	94	17	45	100,5
2,21	33	83	92	17	45	100,5
2,34	35	82	91	18	45	100,5
2,43	33	82	93	18	45	100,5
2,51	35	82	92	18	45	100,5
2,43	34	82	92	18	45	100,5
2,51	35	82	92	18	45	100,5
2,33	33	81	94	19	45	100,5
2,02	32	80	93	19	50	101,5
ling speed as in 3.3.2.1.1						
2,49	33	80	92	19	50	101,5
ling speed as in 3.3.2.1.2						
2,16	35	83	91	19	50	101,5
2,43	33	82	91	20	50	101,5
2,27	34	81	93	20	50	101,5
1,95	34	83	94	20	50	101,5
ling speed as in 3.3.2.2.1						
2,66	32	81	92	20	50	101,5
ling speed as in 3.3.2.2.2						
2,29	32	80	92	20	50	101,5



4 OPTIONAL TEST RESULTS

4.1 Turning area and turning circle

Wheel equipment: front: 12,4-24 6 PR
 rear: 16,9-34 8 PR

	With brakes		Without brakes	
	Right-hand	Left-hand	Right-hand	Left-hand
	m	m	m	m
Radius of turning area	4,59/4,06	4,49/4,01	5,01/5,39	4,98/5,29
Radius of turning circle	4,40/3,87	4,30/3,82	4,82/5,20	4,79/5,10

Four-wheel-drive switched: OFF/ON

4.2 Location of centre of gravity

- Height above ground: 929 mm
- Distance forward from the vertical plane containing the axis of the rear-wheels: 930 mm
- Distance from the median plane of the tractor, left-side: 1,0 mm

4.3 Braking

- Date of test: 28.10.97

4.3.1 Cold service braking device test

	Speed before application of brakes km/h	Braking device control force daN	Mean deceleration m/s ²
Ballasted tractor	28,5	42	3,85
Unballasted tractor	28,5	42	4,27

- Maximum deviation of tractor from his original course: none
- Abnormal vibration: none



4.3.2 Fade test

Speed before application of brakes km/h	Braking device control force daN	Mean deceleration m/s ²
28,5	42	3,60

- Maximum deviation of tractor from his original course: none
- Abnormal vibration: none
- Brake heating method: by towing of the tractor for 1 km

4.3.3 Parking braking device test

	Uphill daN	Downhill
Braking device control force	17,5	18,5




Braking test

Ballasted cold: —————

Ballasted warm: - - - - -

Unballasted cold: - . - . - .

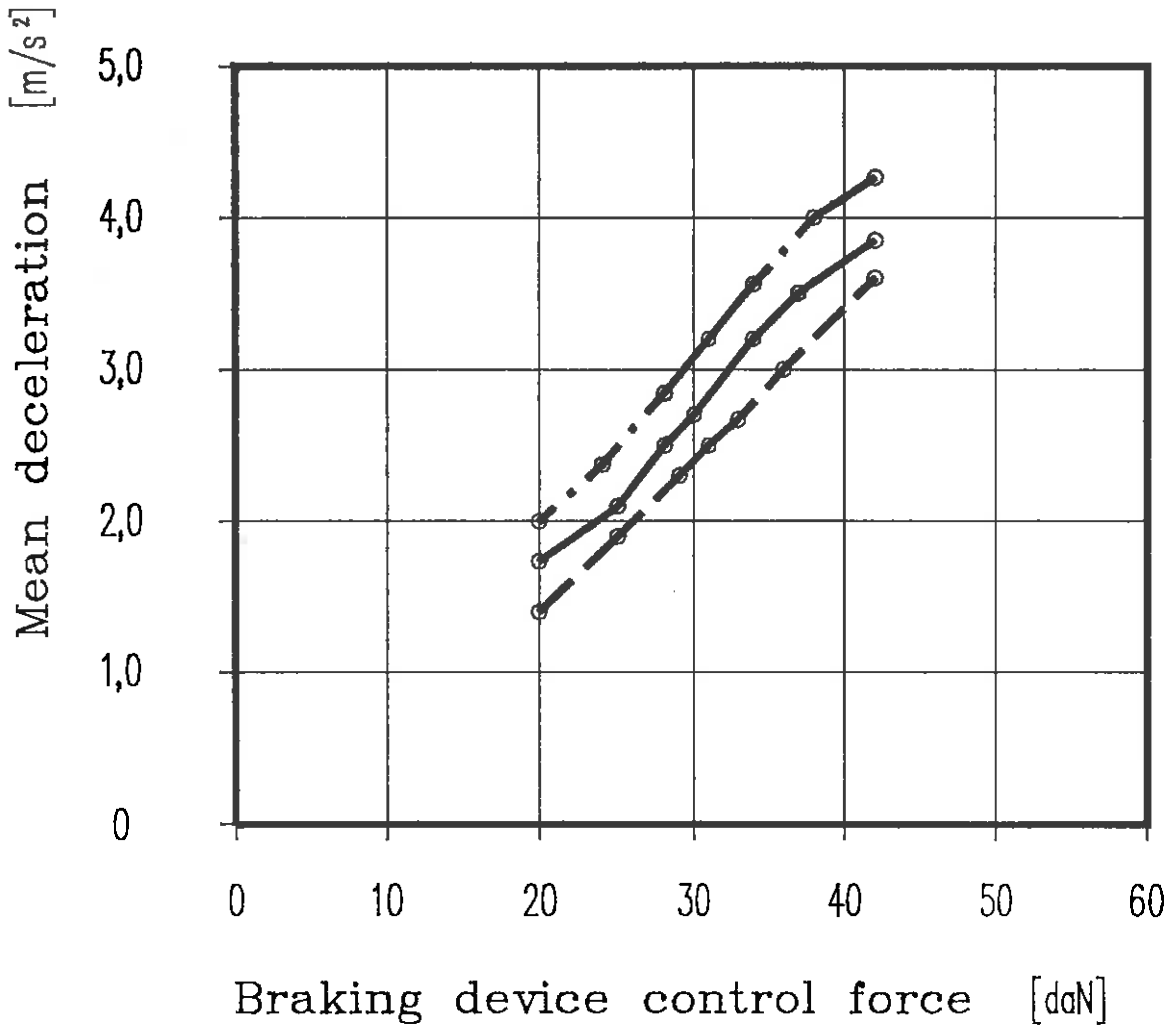

Speed before application of brakes: 28,5 km/h



4.4 Measurement of external noise

- Date of test: 21.08.1997
- Sound level meter,
Make/Model/Type: Brüel & Kjaer 2230
- Type of track: concrete
- Gear number: H3 „Hare”
- Travelling speed before
acceleration: 22,4 km/h
- Sound level: 82,0 dB(A)

5 REPAIRS

None

6 REMARKS

None

