


Signify Luminaires (Shanghai) Co., Ltd.

# Waterproof LED fixture WT210C G2 series and WT228C G2 series

Resistance to ammonia

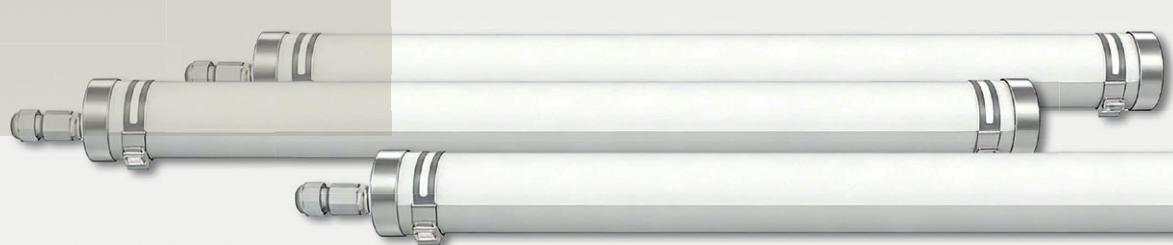

SIGNIFY  
WT210C G2 AND WT228C G2  
✓ Resistance to ammonia

DLG Test Report 7580



## Overview

A test mark "DLG APPROVED for individual criteria" is awarded for agricultural products which have successfully fulfilled a scope-reduced usability testing conducted by DLG according to independent and recognized evaluation criteria. The test is intended to highlight particular innovations and key criteria of the test object. The test may contain criteria from the DLG test scope for overall tests, or focus on other value-determining characteristics and properties of the test subject. The minimum requirements, test conditions and procedures as well as the evaluation bases of the test results will be specified in consultation with an expert group of DLG. They correspond to the recognized rules of technology, as well as scientific and agricultural knowledge and requirements. The successful testing is concluded with the publication of a test report, as well as the awarding of the test mark which is valid for five years from the date of awarding.



The ammonia resistance test was performed as a laboratory test according to the patented DLG test standard. This test is intended to determine the suitability of equipment for animal living areas to withstand the impacts of animal environments.

Other criteria were not tested.

## Assessment in brief

The LED Light "WT210C G2 series" and "WT228C G2 series" from Signify Luminaires (Shanghai) Co., Ltd., has successfully completed the DLG test for ammonia resistance.

According to this result, it can be assumed that these luminaires are resistant to the typical environmental conditions of animal living areas and that no accelerated reduction of the product lifetime

will occur. In addition, the LED Light was operated actively in the chamber for the entirety of the test.

No product damage was observed here.

*Table 1:*  
*Overview of results:*

DLG QUALITY PROFILE	Evaluation*
Resistance to ammonia	█ █ █ █ □
Preservation of the luminous flux	█ █ █ █ □

\* The DLG test framework specifies the following evaluation range:  
█ █ █ or better = meets, exceeds or clearly exceeds the specified DLG standard,  
█ █ = meets the statutory requirements for marketing the product, █ = failed

## The product

### Manufacturer and Applicant

Signify Luminaires (Shanghai) Co., Ltd.

2nd Floor, Building 1, No. 2555, Hechuan Road, Minhang District, Shanghai 200233

China

Product:

LED waterproof fixture "WT210C G2 series" and "WT228C G2 series"

Contact:

[www.signify.com.cn](http://www.signify.com.cn)

gc\_communications@signify.com

### Description and Technical Data

The LED waterproof fixture "WT210C G2 series" and "WT228C G2 series" is suitable for use in animal living areas and in agricultural farm buildings.

Table 2:

Technical data (according to manufacturer)

	WT210C G2	WT228C G2		
... LED50S/8XX PSU TW1 PMMA L1200		... LED50S/8XX PSU L1200 TW		
... LED39S/8XX PSU TW1 PMMA L1500		... LED70S/8XX PSU L1500 TW		
... LED70S/8XX PSU TW1 PMMA L1500		... LED50S/8XX PSD L1200 TW		
... LED50S/8XX PSD TW1 PMMA L1200		... LED70S/8XX PSD L1500 TW		
... LED70S/8XX PSD TW1 PMMA L1500				
... LED50S/8XX WIA TW1 PMMA L1200				
... LED70S/8XX WIA TW1 PMMA L1500				
	L1200	L1500	L1200	L1500
Electrical connection				
Voltage		220 V-240 V AC		
Frequency		50/60 Hz		
Rated input power	31 W	26/43.5 W	31 W	43.5 W
Dimension				
Length	1,225 mm	1,525 mm	1,225 mm	1,525 mm
Diameter		ø 75 mm		
Addition technical data				
Housing material		PMMA		
Material of end caps		stainless steel		
Protection rating		IP67		
Impact resistance		IK06		
"XX" Color temperature (CCT)		3,000 ... 6,500 K		
Rated luminous flux	5,000 lm	3,900 ... 7,000 lm	5,000 lm	7,000 lm
Light angle		120°		
Color rendering index (CRI)		80		
dimmable		no		

## The method

### Resistance to ammonia

The ammonia resistance of the LED light “WT210C G2 series” and “WT228C G2 series” was determined by a laboratory test with eight single luminaires according to the patented DLG test standard for agricultural use. The laboratory test is designed to replicate the conditions of a usage period of about 10 years exposure to animal living areas.

The test was carried out in a climate chamber under the following climate conditions:

Test duration	1500 h
Air temperature	70 °C
Relative humidity	70 %
Ammonia concentration	750 ppm

For assessing the ammonia resistance, each luminaire was examined visually, gravimetrically and the plastic parts additionally through measurement of the hardness (Shore D) before and after the climate testing.

The luminaires have additionally been following a cycle of operation predefined by DLG (3 hours on, 1 hour off) in order to evaluate any thermal impacts caused by switch-on and -off procedures during ammonia fumigation. Furthermore the luminous flux was measured according to DIN EN 13032 before and after the fumigation in order to get additional information regarding the aging process.

In order to avoid overheating ( $> 70^{\circ}\text{C}$ ), the luminaires could be operated at a reduced power level during the testing period.

For the approval of all luminaires in table 2, the LED Light “WT210C G2 series” and “WT228C G2 series” was tested in two different lengths up to a power rating of 50 W. The luminaire can also be operated at a reduced power if it remains otherwise identical in construction to the tested model. After the tests, the luminaires underwent visual examination to a reference sample that was identical in construction.

## Detailed account of the test results

### Resistance to ammonia

#### *Visual test*

The comparative visual examination after the ammonia exposure has shown slight discoloration on the outside of the housing. However, the lights were deformed. Even if there is no change in their properties to be expected, a three-point suspension or strain relief is recommended for lights with an length of 1,500 mm.

During the test, the luminaire appeared to be sufficiently gas-tight. Nevertheless it cannot be ruled out, that a limited amount of ammonia respectively ammonium compounds could enter the luminaire housing. This has not been verified.

The defects are rated as insignificant. The examination of the manufacturer's mounting parts didn't also show any defects.

#### *Gravimetric test*

Weight comparisons before and after the ammonia fumigation have not shown any measurable increases or decreases in weight. All determined changes were within the measurement uncertainty.

#### *Hardness test*

During the hardness test (Shore D) no measurable changes were observed. All determined changes were within the measurement uncertainty.

#### *Functional test*

No defects were observed. All luminaires worked after the conducted tests.

#### *Preservation of the luminous flux*

After completion of the test the luminaire still had a luminous flux of 81.2 % (length 600 mm) and 97.5 % (length 1,500 mm).

Based on the results of these tested parameters, the luminaire is evaluated as resistant to ammonia.

## Summary

The results show that the LED Light "WT210C G2 series" and "WT228C G2 series" from Signify Luminaires (Shanghai) Co., Ltd., fulfills the testing requirements for ammonia resistance and thus receives the test mark DLG APPROVED. It can be expected that the luminaire is resistant to ammonical air in animal living areas and that no accelerated reduction of the product lifetime occurs.

The LED Light was operated both passively and actively during the ammonia fumigation in the test chamber and passed both tests successfully.

## Further information

### Testing agency

DLG TestService GmbH,  
Gross-Umstadt location, Germany

The tests are conducted on behalf of DLG e.V.

### DLG test framework

DLG test specification „Lighting systems in animal houses“ (current as of 06/2025)

### Department

Farm Inputs

### Division head

Dr. Michael Eise

### Test engineer(s)

Dipl.-Ing. (FH) Tommy Pfeifer\*

### Photometric laboratory

Photometrik GmbH, Einsteinstraße 24  
64859 Eppertshausen, Germany

\* Author

## DLG. An open network and professional voice.

Founded in 1885 by the German engineer Max Eyth, DLG (Deutsche Landwirtschafts-Gesellschaft – German Agricultural Society) is an expert organisation in the fields of agriculture, agribusiness and the food sector. Its mission is to promote progress through the transfer of knowledge, quality standards and technology. As such, DLG is an open network and acts as the professional voice of the agricultural, agribusiness and food sectors.

As one of the leading organisations in the agricultural and food market, DLG organises international trade fairs and events in the specialist areas of crop production, animal husbandry, machinery and equipment for farming and forestry work as well as energy supply and food technology. DLG's quality tests for food, agricultural equipment and farm inputs are highly acclaimed around the world.

For more than 130 years, our mission has also been to promote dialogue between academia, farmers and

the general public across disciplines and national borders. As an open and independent organisation, our network of experts collaborate with farmers, academics, consultants, policymakers and specialists in administration in the development of future-proof solutions for the challenges facing the agriculture and the food industry.

### Leaders in the testing of agricultural equipment and input products

The DLG Test Center Technology and Farm Inputs and its test methods, test profiles and quality seals hold a leading position in testing and certifying equipment and inputs for the agricultural industry. Our test methods and test profiles are developed by an independent and impartial commission to simulate in-field applications of the products. All tests are carried out using state-of-the-art measuring and test methods applying also international standards.

Internal test code DLG: 2412-0034 and 2505-00399/identproduct 2601-0107

Copyright DLG: © 2025 DLG



**DLG TestService GmbH**

**Gross-Umstadt location**

Max-Eyth-Weg 1 • 64823 Groß-Umstadt • Germany  
Phone +49 69 24788-600 • Fax +49 69 24788-690  
Tech@DLG.org • www.DLG.org

**All DLG test reports are available for download free of charge at: [www.DLG-Test.de](http://www.DLG-Test.de)**